

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1426131

Luminaire Tested: P3A02RHB2750DE010 E3HY1WMH_4000K

Issue Date: 3/9/2026

Test Information

Test Method: LM-79-2019
Report Number: P1426131
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-658-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/9/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A02RHB2750DE010 E3HY1WMH_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, RH optic, 4000K CCT AND, 80CRI , E3HY1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 124.0 lumens
Efficiency: N/A
Efficacy: 42.8 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.55
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 2.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1426131

CATALOG NUMBER: P3A02RHB2750DE010 E3HY1WMH_4000K

Luminous Intensity Polar Plot

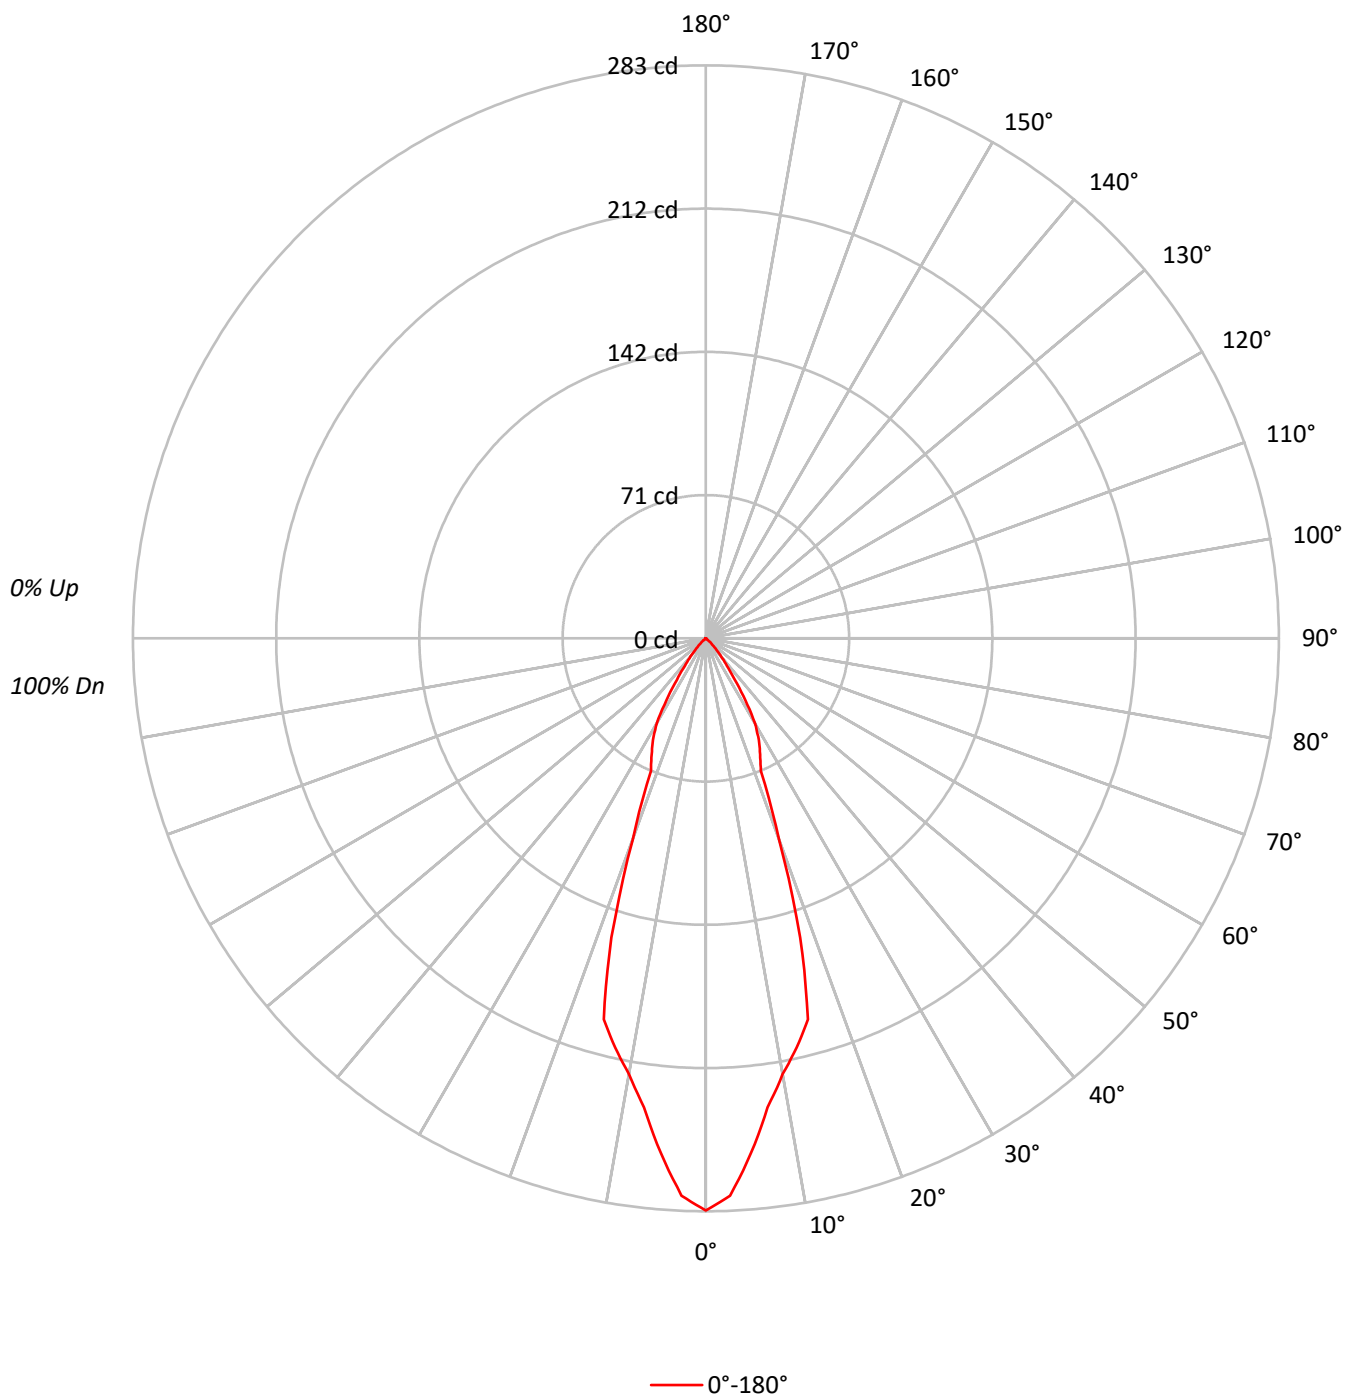

TEST NUMBER: P1426131

CATALOG NUMBER: P3A02RHB2750DE010 E3HY1WMH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97		95
2	109	105	102	99	107	104	100	98	100	98	96		97	95	93		95	93	92		90
3	105	99	95	92	103	98	94	91	95	92	89		93	90	88		91	89	87		85
4	101	94	89	86	99	93	89	85	91	87	84		89	86	83		87	84	82		81
5	96	89	84	81	95	88	84	80	87	83	79		85	82	79		84	81	78		77
6	93	85	80	76	91	84	79	76	83	78	75		81	78	75		80	77	74		73
7	89	81	76	72	88	80	75	72	79	75	72		78	74	71		77	73	71		70
8	85	77	72	69	84	77	72	68	76	71	68		75	71	68		74	70	68		66
9	82	74	69	65	81	73	69	65	73	68	65		72	68	65		71	67	65		64
10	79	71	66	62	78	70	66	62	70	65	62		69	65	62		68	65	62		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	61969
5°	56196
10°	48652
15°	44223
20°	24665
25°	15315
30°	12280
35°	6692
40°	3378
45°	1520
50°	478
55°	76
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1520 cd/sqm

TEST NUMBER: P1426131

CATALOG NUMBER: P3A02RHB2750DE010 E3HY1WMH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	23.2	18.7
10°-20°	49.4	39.8
20°-30°	30.4	24.5
30°-40°	16.6	13.4
40°-50°	4.1	3.3
50°-60°	0.4	0.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	102.9	83.0
0°-40°	119.5	96.4
0°-60°	124.0	100.0
0°-90°	124.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	124.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	283	
5°	255	23
15°	195	49
25°	63	30
35°	25	17
45°	5	4
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1426131

CATALOG NUMBER: P3A02RHB2750DE010 E3HY1WMH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	282.6
2.5°	275.5
5°	255.3
7.5°	233.7
10°	218.5
12.5°	207.0
15°	194.8
17.5°	155.0
20°	105.7
22.5°	70.8
25°	63.3
27.5°	56.6
30°	48.5
32.5°	36.3
35°	25.0
37.5°	17.0
40°	11.8
42.5°	7.9
45°	4.9
47.5°	2.6
50°	1.4
52.5°	0.6
55°	0.2
57.5°	0.2
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)