

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295605

Luminaire Tested: P3A13R15W2N902765DE010 E3DLP1GPH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295605  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A13R15W2N902765DE010 E3DLP1GPH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 2700K CCT AND, 90CRI ,  
E3DLP1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 209.0 lumens  
Efficiency: N/A  
Efficacy: 17.0 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295605  
CATALOG NUMBER: P3A13R15W2N902765DE010 E3DLP1GPH\_2700K

### Luminous Intensity Polar Plot

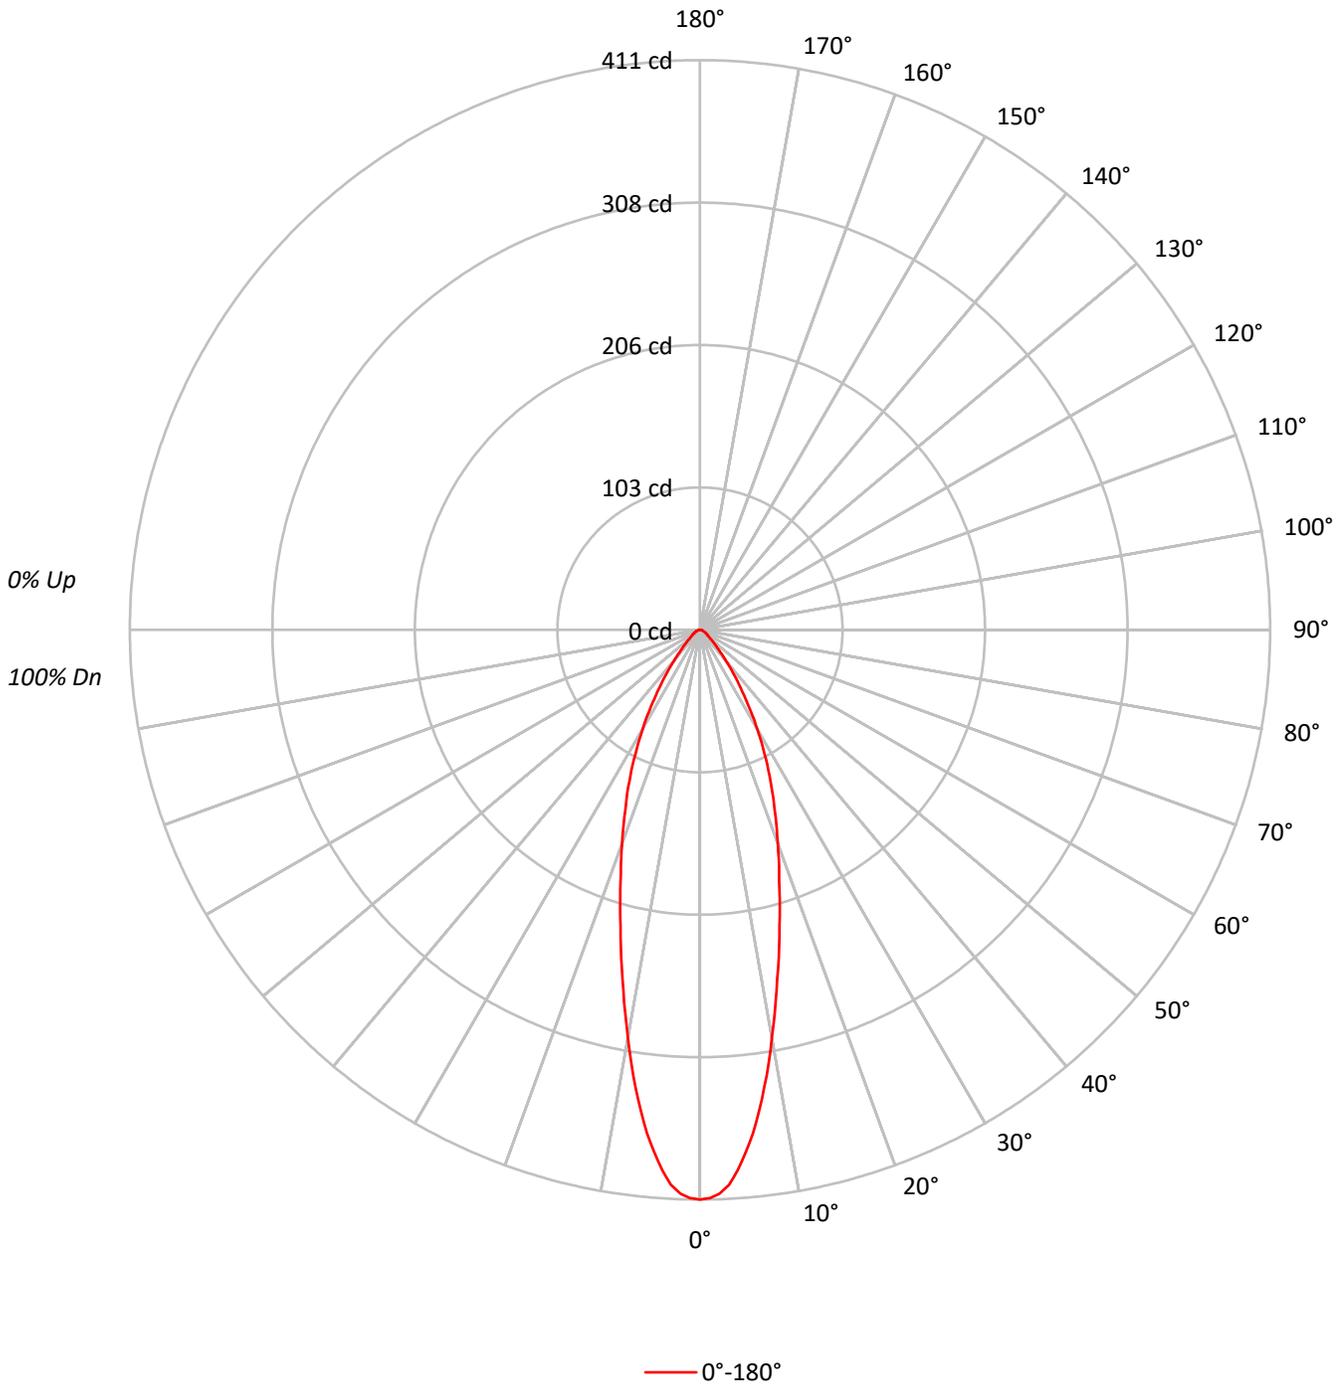





TEST NUMBER: P1295605  
 CATALOG NUMBER: P3A13R15W2N902765DE010 E3DLP1GPH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	33.5	16.0
10°-20°	61.9	29.6
20°-30°	55.1	26.3
30°-40°	32.6	15.6
40°-50°	13.4	6.4
50°-60°	6.3	3.0
60°-70°	3.8	1.8
70°-80°	2.0	1.0
80°-90°	0.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	150.4	72.0
0°-40°	183.0	87.6
0°-60°	202.7	97.0
0°-90°	209.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	209.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	411	
5°	378	34
15°	221	62
25°	120	55
35°	51	33
45°	16	13
55°	7	6
65°	4	4
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P1295605  
CATALOG NUMBER: P3A13R15W2N902765DE010 E3DLP1GPH\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	411.0
1°	410.0
2°	406.9
3°	400.8
4°	390.6
5°	378.4
6°	365.2
7°	349.6
8°	333.3
9°	316.7
10°	298.7
12.5°	257.6
15°	221.3
17.5°	190.1
20°	163.9
22.5°	140.8
25°	120.5
27.5°	100.8
30°	82.5
32.5°	65.8
35°	50.9
37.5°	39.0
40°	29.2
42.5°	21.7
45°	16.3
47.5°	12.6
50°	9.8
52.5°	8.1
55°	6.8
57.5°	5.8
60°	5.1
62.5°	4.4
65°	3.7
67.5°	3.4
70°	2.7
72.5°	2.4
75°	2.0
77.5°	1.4
80°	1.0
82.5°	0.7
85°	0.3
87.5°	0.3
90°	0.0

(END OF REPORT)