

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295609

Luminaire Tested: P3A13R15W2N902765DE010 E3DLP1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1295609
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R15W2N902765DE010 E3DLP1GPH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 5000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 233.0 lumens
Efficiency: N/A
Efficacy: 18.9 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1295609

CATALOG NUMBER: P3A13R15W2N902765DE010 E3DLP1GPH_5000K

Luminous Intensity Polar Plot

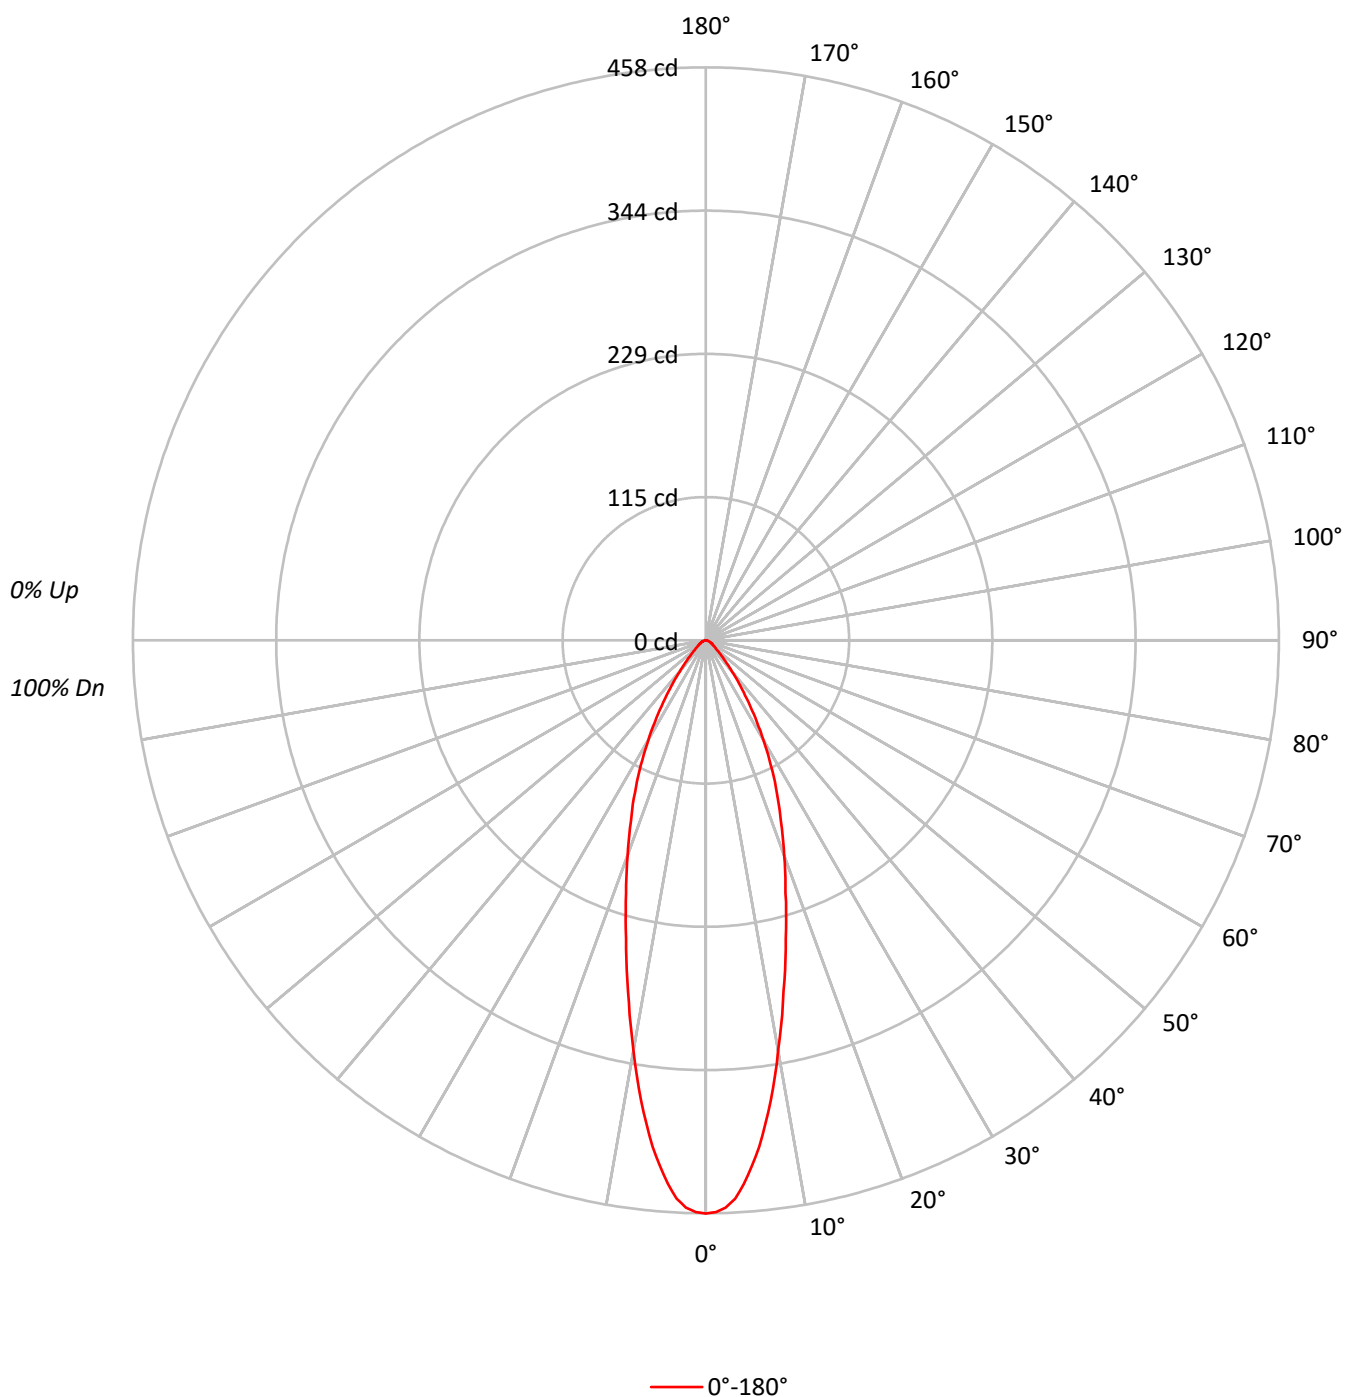

TEST NUMBER: P1295609

CATALOG NUMBER: P3A13R15W2N902765DE010 E3DLP1GPH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	106		111	108	106	104		104	102	101		100	99	98		97	96	95
2	108	103	98	95		105	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	85		89	86	83		87	84	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	93	84	78	74		91	83	78	74		81	77	73		80	76	72		78	75	72
6	88	79	73	69		87	79	73	69		77	72	69		76	71	68		74	71	68
7	84	75	69	65		83	74	69	65		73	68	64		72	67	64		71	67	64
8	80	71	65	61		79	71	65	61		69	64	61		68	64	61		67	63	60
9	77	68	62	58		76	67	62	58		66	61	58		65	61	57		64	60	57
10	74	64	59	55		73	64	59	55		63	58	55		62	58	55		62	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	100474
5°	92868
10°	74147
15°	56005
20°	42657
25°	32494
30°	23269
35°	15205
40°	9303
45°	5644
50°	3753
55°	2906
60°	2500
65°	2179
70°	1923
75°	1949
80°	1389
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5644 cd/sqm

TEST NUMBER: P1295609

CATALOG NUMBER: P3A13R15W2N902765DE010 E3DLP1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.4	16.0
10°-20°	69.0	29.6
20°-30°	61.4	26.3
30°-40°	36.3	15.6
40°-50°	14.9	6.4
50°-60°	7.0	3.0
60°-70°	4.3	1.8
70°-80°	2.2	1.0
80°-90°	0.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	167.7	72.0
0°-40°	204.0	87.6
0°-60°	226.0	97.0
0°-90°	233.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	233.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	458	
5°	422	37
15°	247	69
25°	134	61
35°	57	36
45°	18	15
55°	8	7
65°	4	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1295609

CATALOG NUMBER: P3A13R15W2N902765DE010 E3DLP1GPH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	458.2
1°	457.1
2°	453.7
3°	446.9
4°	435.5
5°	421.9
6°	407.1
7°	389.7
8°	371.6
9°	353.0
10°	333.0
12.5°	287.2
15°	246.7
17.5°	211.9
20°	182.8
22.5°	157.0
25°	134.3
27.5°	112.4
30°	91.9
32.5°	73.4
35°	56.8
37.5°	43.5
40°	32.5
42.5°	24.2
45°	18.2
47.5°	14.0
50°	11.0
52.5°	9.1
55°	7.6
57.5°	6.4
60°	5.7
62.5°	4.9
65°	4.2
67.5°	3.8
70°	3.0
72.5°	2.6
75°	2.3
77.5°	1.5
80°	1.1
82.5°	0.8
85°	0.4
87.5°	0.4
90°	0.0

(END OF REPORT)