

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295742

Luminaire Tested: P3A13R20W2N902750DE010 E3DLD1GPH\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295742  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A13R20W2N902750DE010 E3DLD1GPH\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 4000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 299.0 lumens  
Efficiency: N/A  
Efficacy: 24.3 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295742  
CATALOG NUMBER: P3A13R20W2N902750DE010 E3DLD1GPH\_4000K

### Luminous Intensity Polar Plot

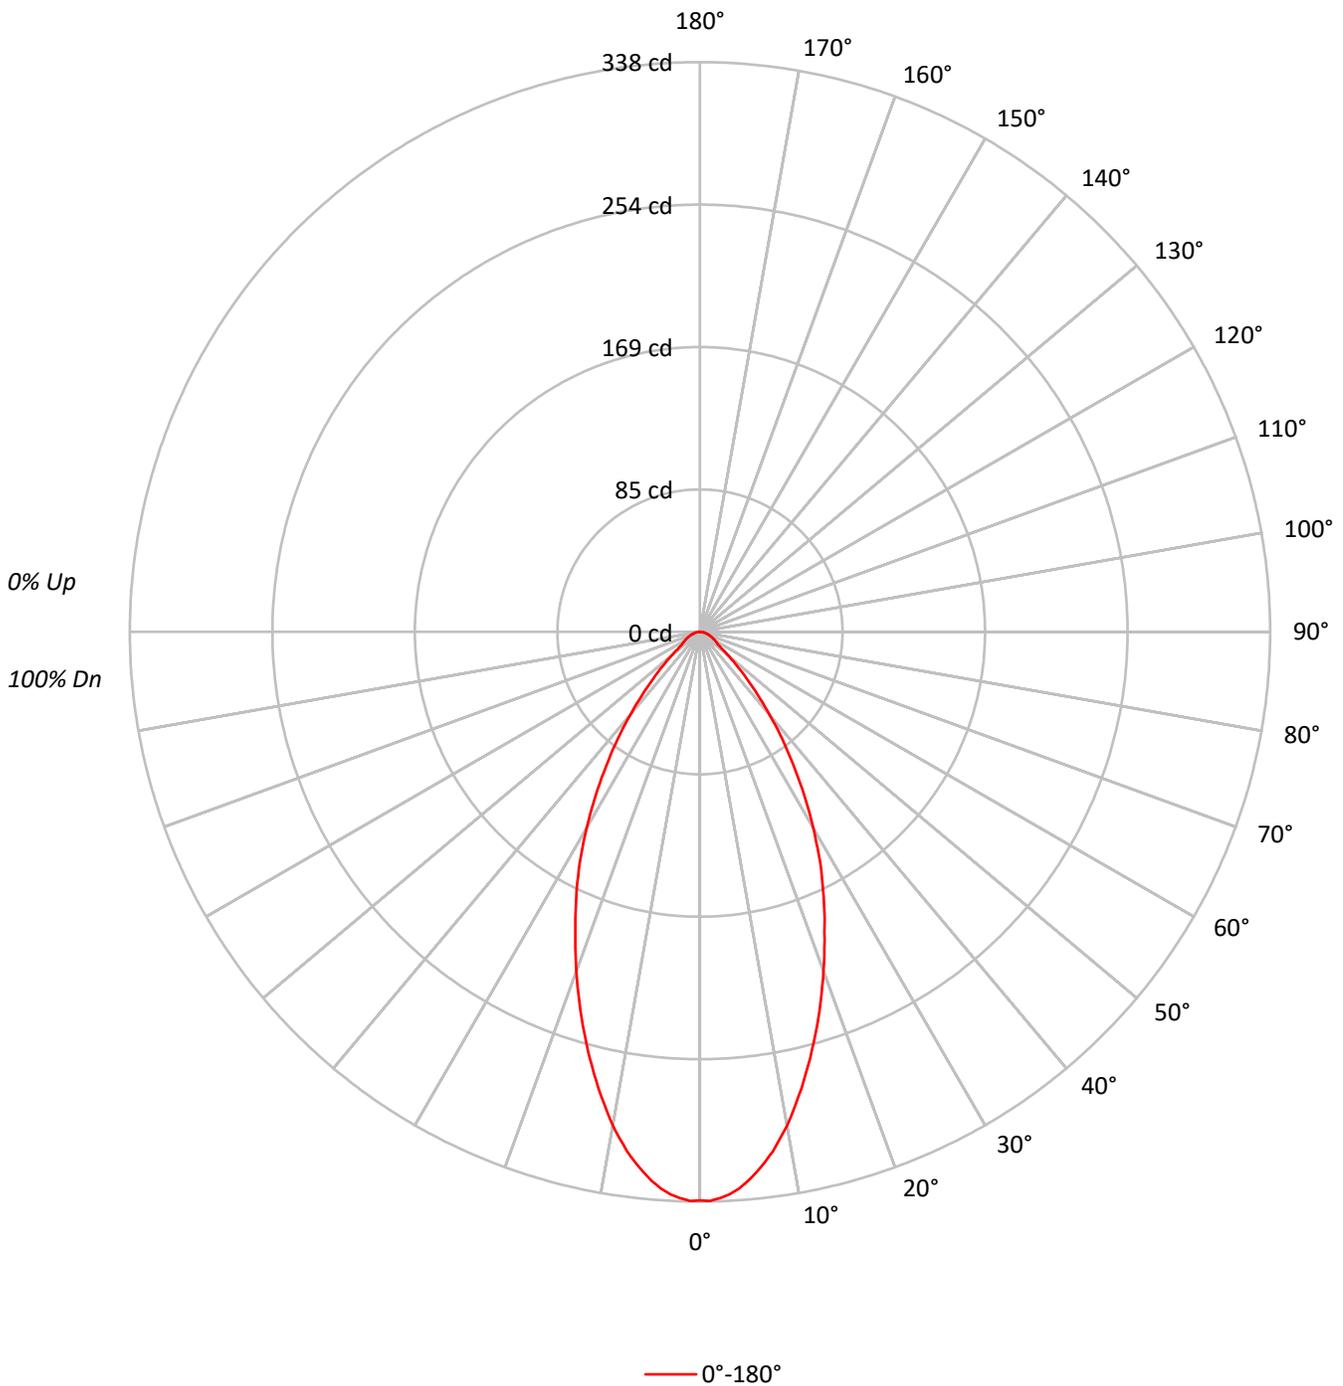



TEST NUMBER: P1295742

CATALOG NUMBER: P3A13R20W2N902750DE010 E3DLD1GPH\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83			83
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76			76
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70			70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65			65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60			60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55			55
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52			52
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48			48
10	68	58	51	47	67	57	51	47	56	51	47	56	51	47	55	50	47	45			45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	73963
5°	71979
10°	66220
15°	58298
20°	49984
25°	42002
30°	33955
35°	25832
40°	18377
45°	12125
50°	7505
55°	4932
60°	4517
65°	4151
70°	3911
75°	3558
80°	3410
85°	2768

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12125 cd/sqm



TEST NUMBER: P1295742

CATALOG NUMBER: P3A13R20W2N902750DE010 E3DLD1GPH\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	30.3	10.1
10°-20°	71.5	23.9
20°-30°	79.3	26.5
30°-40°	60.5	20.2
40°-50°	31.0	10.4
50°-60°	12.7	4.3
60°-70°	7.9	2.7
70°-80°	4.5	1.5
80°-90°	1.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	181.1	60.6
0°-40°	241.6	80.8
0°-60°	285.3	95.4
0°-90°	299.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	299.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	337	
5°	327	30
15°	257	71
25°	174	79
35°	96	61
45°	39	31
55°	13	13
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1295742  
CATALOG NUMBER: P3A13R20W2N902750DE010 E3DLD1GPH\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	337.3
1°	337.7
2°	336.1
3°	334.2
4°	331.2
5°	327.0
6°	322.1
7°	316.8
8°	311.1
9°	304.2
10°	297.4
12.5°	277.6
15°	256.8
17.5°	235.5
20°	214.2
22.5°	192.9
25°	173.6
27.5°	154.2
30°	134.1
32.5°	115.1
35°	96.5
37.5°	80.1
40°	64.2
42.5°	50.5
45°	39.1
47.5°	29.6
50°	22.0
52.5°	16.3
55°	12.9
57.5°	11.8
60°	10.3
62.5°	9.1
65°	8.0
67.5°	6.8
70°	6.1
72.5°	4.9
75°	4.2
77.5°	3.4
80°	2.7
82.5°	1.9
85°	1.1
87.5°	0.4
90°	0.0

(END OF REPORT)