

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295850

Luminaire Tested: P3A13R20W2N902765DE010 E3D1WMH_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1295850
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R20W2N902765DE010 E3D1WMH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 3000K CCT AND, 90CRI ,
E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 958.0 lumens
Efficiency: N/A
Efficacy: 77.9 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1295850

CATALOG NUMBER: P3A13R20W2N902765DE010 E3D1WMH_3000K

Luminous Intensity Polar Plot

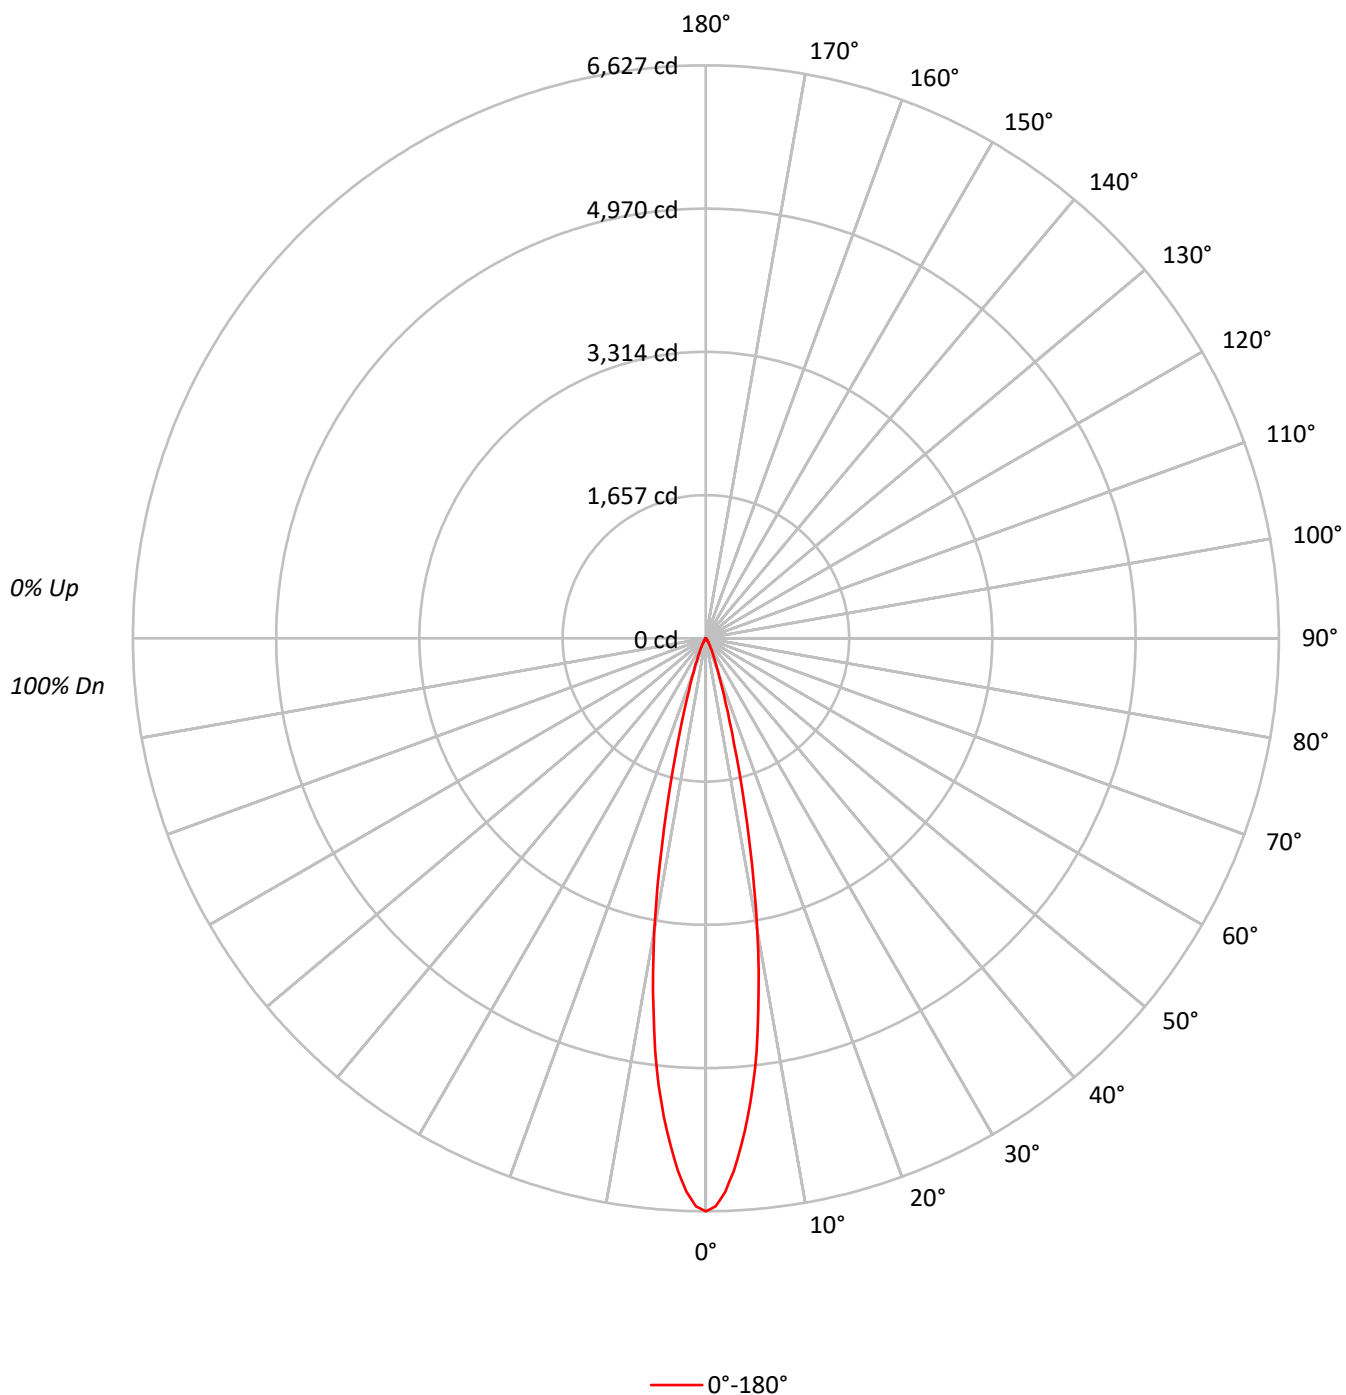

TEST NUMBER: P1295850

CATALOG NUMBER: P3A13R20W2N902765DE010 E3D1WMH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	114	112	110	113	111	110	108	107	106	105		104	103	102		100	100	99	97
2	112	109	106	104	110	107	105	103	104	102	101		101	100	98		99	98	96	95
3	109	105	102	99	107	104	101	98	101	99	97		99	97	95		97	95	94	93
4	106	101	98	95	105	100	97	95	99	96	94		97	95	93		95	93	92	91
5	104	98	95	92	102	98	94	92	96	93	91		95	92	90		93	91	90	89
6	101	96	92	89	100	95	92	89	94	91	89		93	90	88		92	89	88	87
7	99	93	90	87	98	93	89	87	92	89	86		91	88	86		90	87	86	85
8	97	91	87	85	96	91	87	85	90	87	85		89	86	84		88	86	84	83
9	95	89	85	83	94	89	85	83	88	85	83		87	84	83		87	84	82	81
10	93	87	84	81	92	87	83	81	86	83	81		86	83	81		85	83	81	80

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1453217
5°	1223528
10°	764203
15°	285700
20°	98079
25°	40865
30°	19243
35°	8620
40°	4065
45°	2078
50°	751
55°	153
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2078 cd/sqm

TEST NUMBER: P1295850

CATALOG NUMBER: P3A13R20W2N902765DE010 E3D1WMH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	462.2	48.3
10°-20°	380.7	39.7
20°-30°	86.5	9.0
30°-40°	22.0	2.3
40°-50°	5.5	0.6
50°-60°	0.7	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	929.5	97.0
0°-40°	951.5	99.3
0°-60°	957.7	100.0
0°-90°	958.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	958.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6627	
5°	5558	462
15°	1258	381
25°	169	87
35°	32	22
45°	7	6
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1295850

CATALOG NUMBER: P3A13R20W2N902765DE010 E3D1WMH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	6627.2
1°	6571.0
2°	6405.4
3°	6167.9
4°	5876.5
5°	5558.5
6°	5204.2
7°	4813.1
8°	4356.9
9°	3904.8
10°	3432.1
11°	2929.1
12°	2426.8
13°	2001.3
14°	1594.5
15°	1258.5
16°	993.3
17°	783.6
18°	629.6
19°	512.0
20°	420.3
21°	351.3
22°	293.3
23°	243.8
24°	203.4
25°	168.9
27.5°	110.5
30°	76.0
32.5°	46.8
35°	32.2
37.5°	20.6
40°	14.2
42.5°	9.7
45°	6.7
47.5°	4.5
50°	2.2
52.5°	1.1
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P1295850

CATALOG NUMBER: P3A13R20W2N902765DE010 E3D1WMH_3000K

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)