

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296362

Luminaire Tested: P3A13R30W2N902750DE010 E3DL1LI_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296362
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R30W2N902750DE010 E3DL1LI_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 2700K CCT AND, 90CRI ,
E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 734.0 lumens
Efficiency: N/A
Efficacy: 59.7 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296362

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1LI_2700K

Luminous Intensity Polar Plot

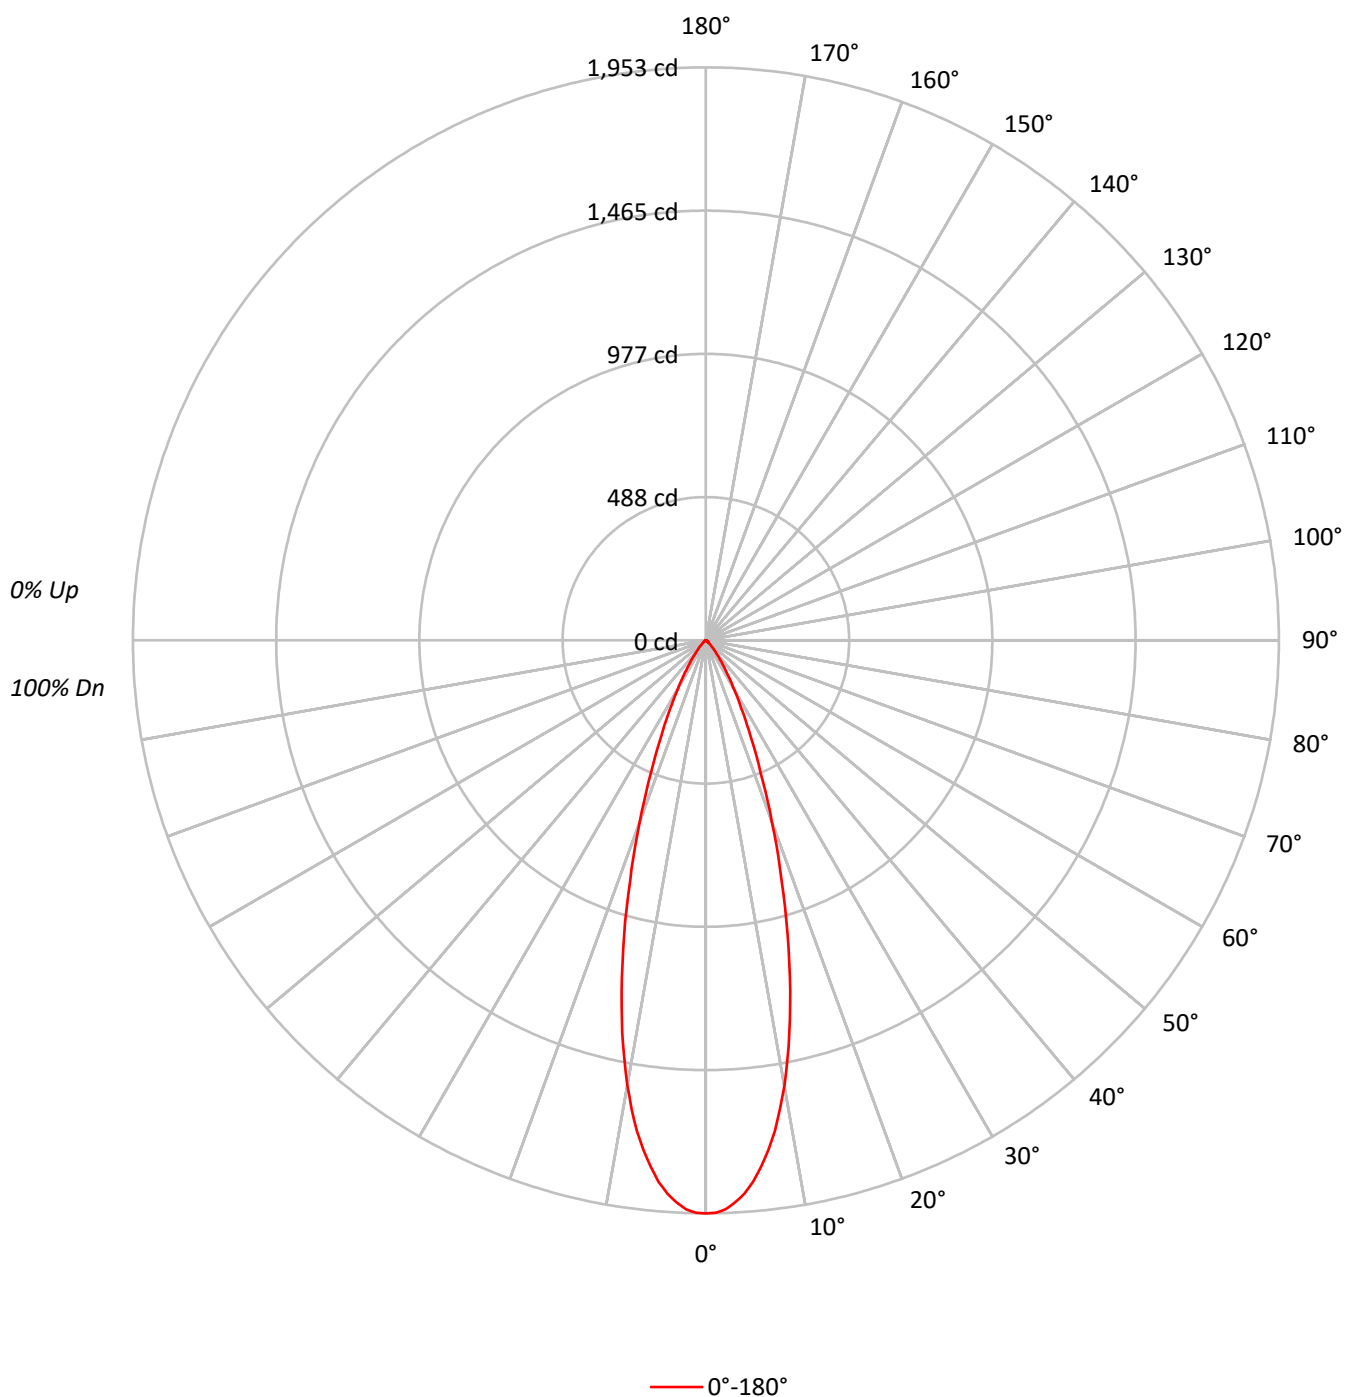

TEST NUMBER: P1296362

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1LI_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97		95
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95	93	92		90
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91	89	87		86
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88	85	83		82
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85	82	79		78
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81	78	76		75
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		78	75	73		71
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76	72	70		69
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73	70	67		66
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71	67	65		63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	428321
5°	407659
10°	342902
15°	247289
20°	153383
25°	87247
30°	48463
35°	26368
40°	13883
45°	7536
50°	4025
55°	2638
60°	2412
65°	2542
70°	2244
75°	1779
80°	1768
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 7536 cd/sqm

TEST NUMBER: P1296362

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1LI_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	166.8	22.7
10°-20°	296.4	40.4
20°-30°	171.3	23.3
30°-40°	65.0	8.9
40°-50°	20.0	2.7
50°-60°	6.7	0.9
60°-70°	4.6	0.6
70°-80°	2.5	0.3
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	634.5	86.4
0°-40°	699.6	95.3
0°-60°	726.2	98.9
0°-90°	734.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	734.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1953	
5°	1852	167
15°	1089	296
25°	361	171
35°	98	65
45°	24	20
55°	7	7
65°	5	5
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1296362

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1LI_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1953.3
1°	1951.9
2°	1940.1
3°	1917.9
4°	1890.2
5°	1852.0
6°	1803.5
7°	1749.4
8°	1689.1
9°	1617.0
10°	1540.0
11°	1456.8
12°	1368.7
13°	1276.5
14°	1182.9
15°	1089.3
17.5°	859.1
20°	657.3
22.5°	487.4
25°	360.6
27.5°	262.1
30°	191.4
32.5°	138.0
35°	98.5
37.5°	68.6
40°	48.5
42.5°	34.0
45°	24.3
47.5°	16.6
50°	11.8
52.5°	8.3
55°	6.9
57.5°	6.2
60°	5.5
62.5°	4.9
65°	4.9
67.5°	4.2
70°	3.5
72.5°	2.8
75°	2.1
77.5°	2.1
80°	1.4
82.5°	1.4
85°	0.7
87.5°	0.0



TEST NUMBER: P1296362

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1LI_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)