

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296372

Luminaire Tested: P3A13R30W2N902750DE010 E3DL1WH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296372
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R30W2N902750DE010 E3DL1WH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 2700K CCT AND, 90CRI ,
E3DL1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 447.0 lumens
Efficiency: N/A
Efficacy: 36.3 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296372

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1WH_2700K

Luminous Intensity Polar Plot

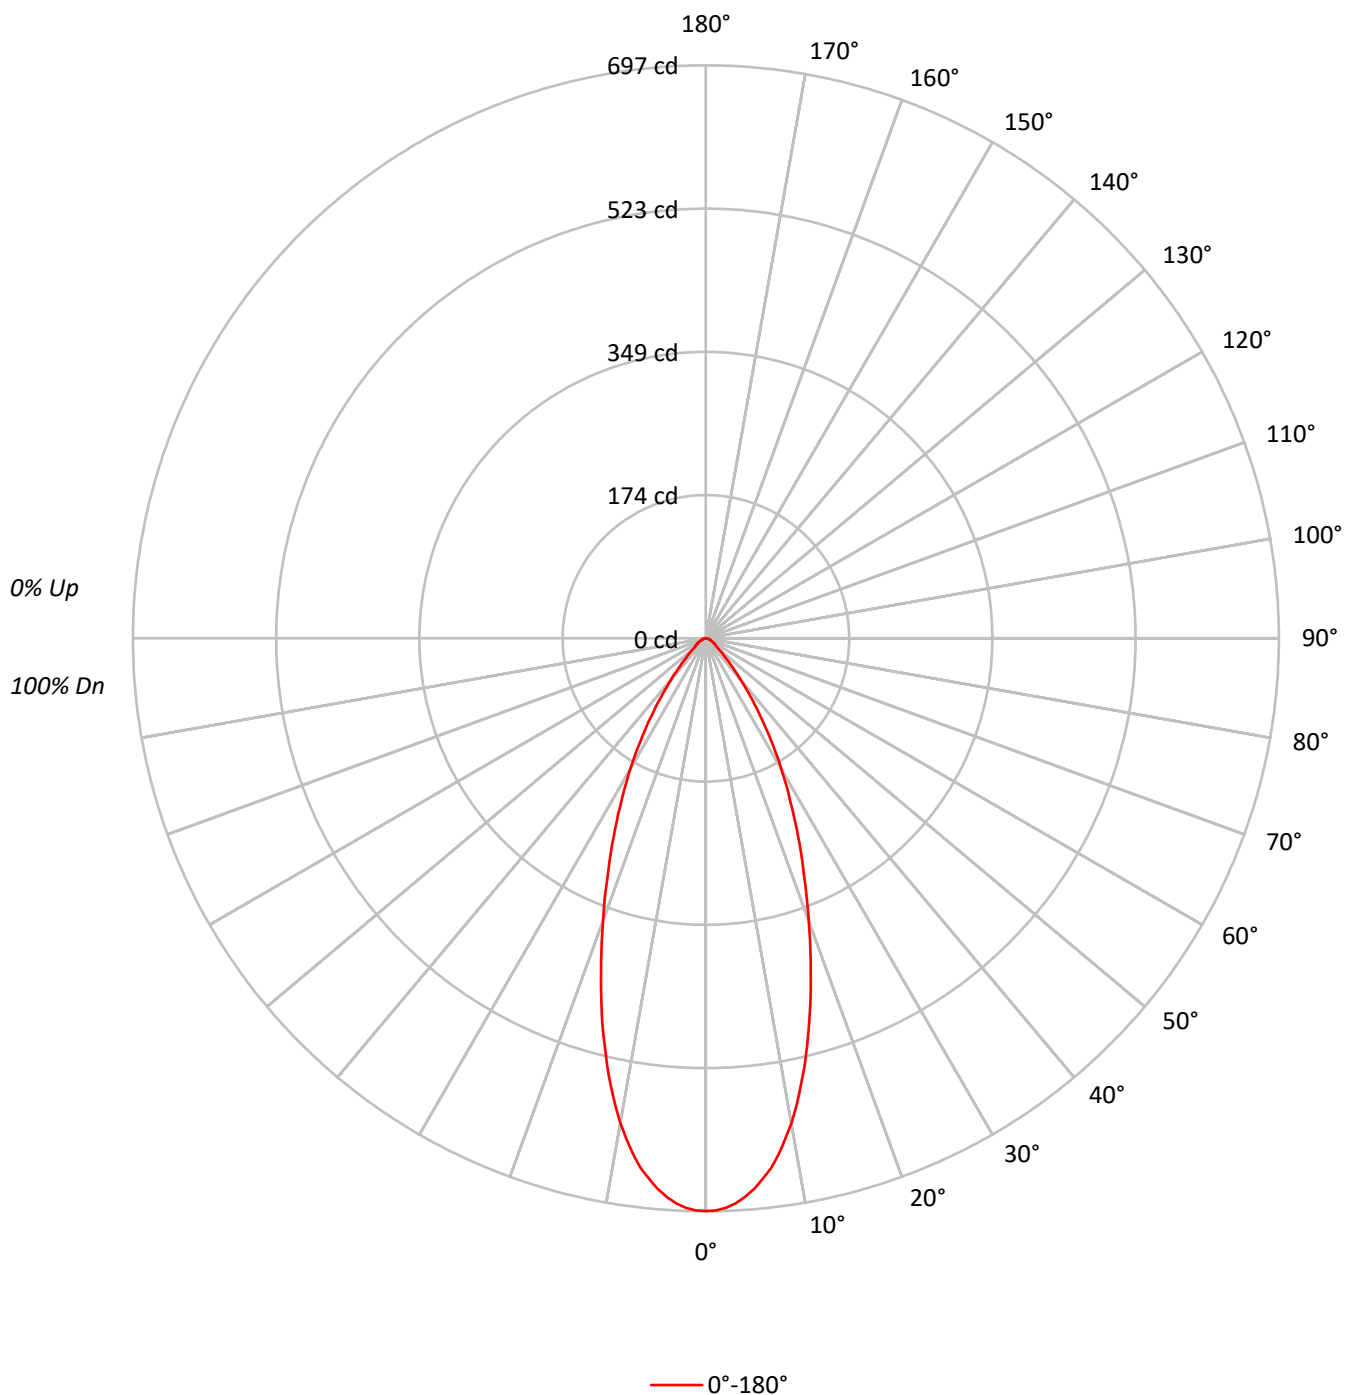

TEST NUMBER: P1296372

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1WH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97	96	95		93
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92	90	88		86
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87	84	82		80
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82	79	76		74
5	92	84	78	73	90	83	77	73	81	76	72		79	75	72		78	74	71		70
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74	70	67		65
7	83	74	68	64	82	74	68	64	72	67	63		71	67	63		70	66	63		61
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67	62	59		58
9	76	67	61	57	75	66	60	57	65	60	56		64	60	56		63	59	56		55
10	73	63	58	54	72	63	57	54	62	57	54		61	57	53		61	56	53		52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	152751
5°	147986
10°	133353
15°	110307
20°	85407
25°	64068
30°	46513
35°	30999
40°	19036
45°	11164
50°	6857
55°	5582
60°	4868
65°	3943
70°	3526
75°	3558
80°	2652
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 11164 cd/sqm

TEST NUMBER: P1296372

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1WH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.8	13.8
10°-20°	133.8	29.9
20°-30°	121.7	27.2
30°-40°	73.6	16.5
40°-50°	29.5	6.6
50°-60°	13.1	2.9
60°-70°	7.9	1.8
70°-80°	4.3	1.0
80°-90°	1.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	317.4	71.0
0°-40°	391.0	87.5
0°-60°	433.6	97.0
0°-90°	447.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	447.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	697	
5°	672	62
15°	486	134
25°	265	122
35°	116	74
45°	36	29
55°	15	13
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1296372

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1WH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	696.6
1°	695.9
2°	693.1
3°	688.3
4°	681.3
5°	672.3
6°	661.2
7°	649.5
8°	634.2
9°	616.9
10°	598.9
11°	578.1
12°	555.9
13°	533.7
14°	509.4
15°	485.9
17.5°	424.2
20°	366.0
22.5°	311.9
25°	264.8
27.5°	221.8
30°	183.7
32.5°	148.3
35°	115.8
37.5°	88.7
40°	66.5
42.5°	48.5
45°	36.0
47.5°	27.0
50°	20.1
52.5°	15.9
55°	14.6
57.5°	12.5
60°	11.1
62.5°	9.0
65°	7.6
67.5°	6.9
70°	5.5
72.5°	4.9
75°	4.2
77.5°	3.5
80°	2.1
82.5°	1.4
85°	1.4
87.5°	0.7



TEST NUMBER: P1296372

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DL1WH_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)