

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296410

Luminaire Tested: P3A13R30W2N902750DE010 E3DLD1WMH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296410
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R30W2N902750DE010 E3DLD1WMH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 4000K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 632.0 lumens
Efficiency: N/A
Efficacy: 51.4 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296410

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DLD1WMH_4000K

Luminous Intensity Polar Plot

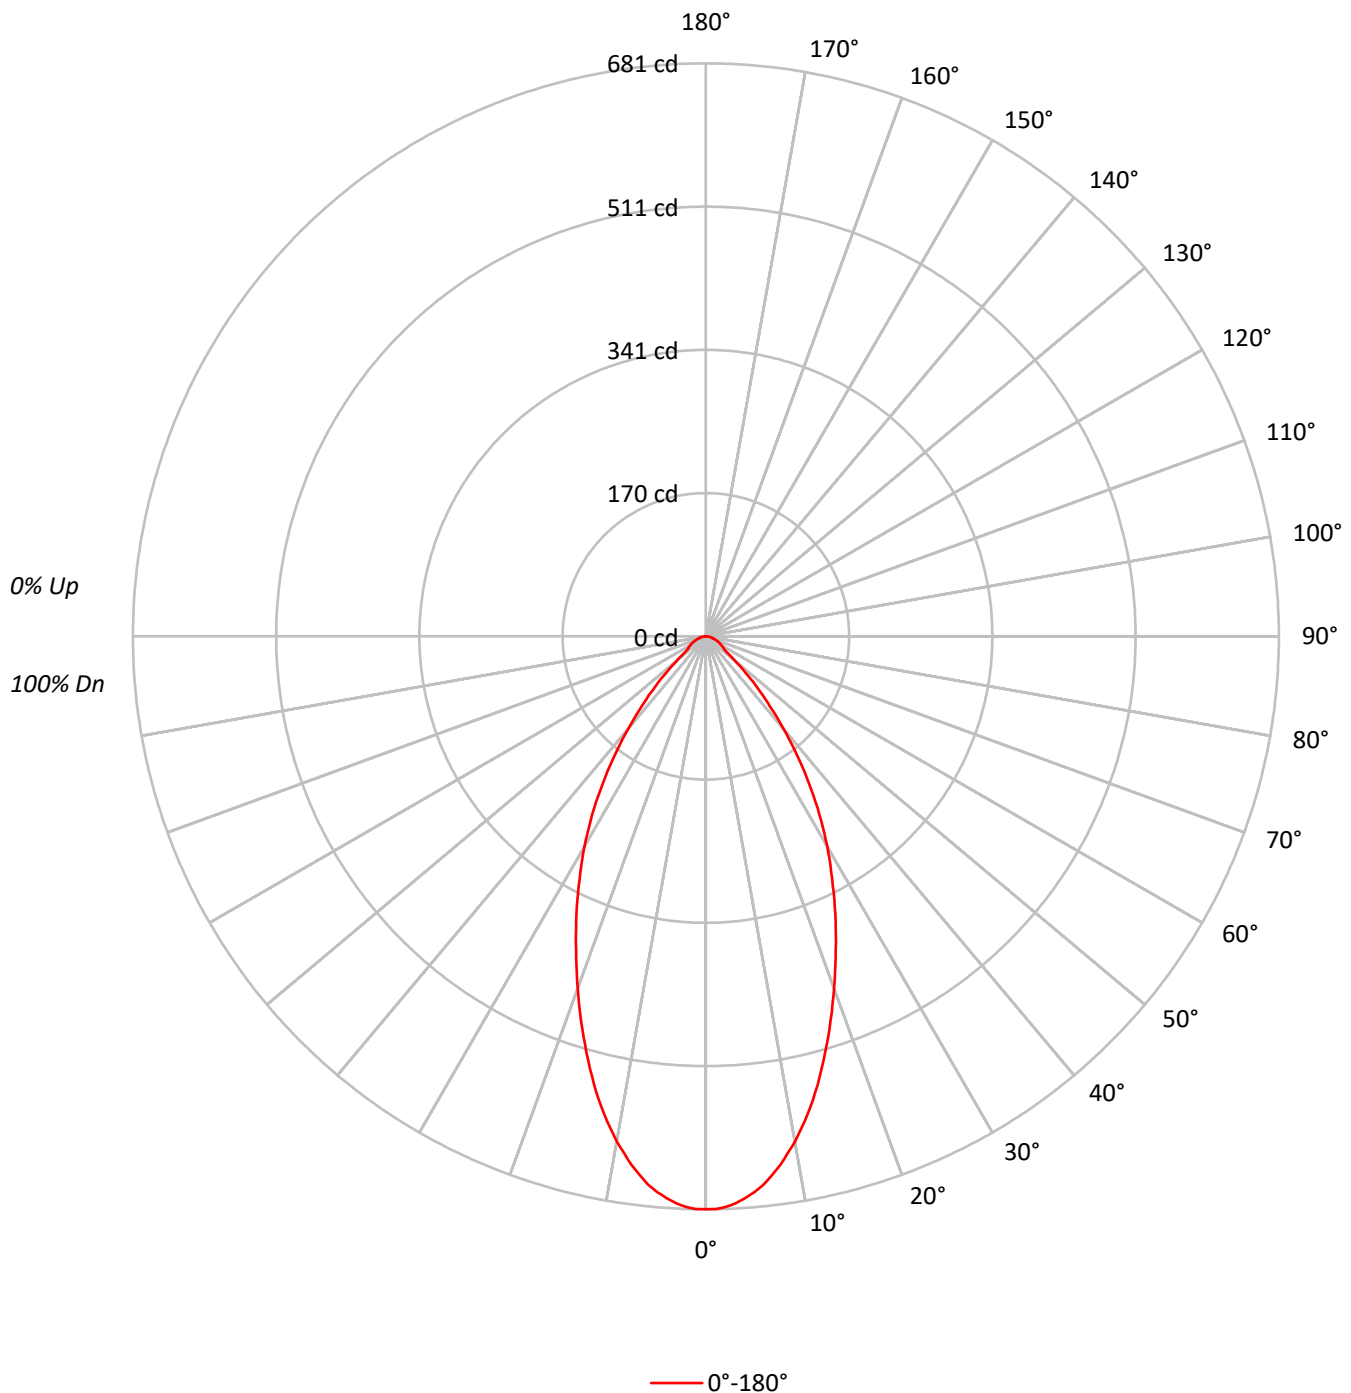

TEST NUMBER: P1296410

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DLD1WMH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	85	79	74	92	84	79	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	149308
5°	145960
10°	135736
15°	120773
20°	103889
25°	87997
30°	73049
35°	57286
40°	41077
45°	26949
50°	15351
55°	10093
60°	9517
65°	8873
70°	7950
75°	7202
80°	6819
85°	5787

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 26949 cd/sqm

TEST NUMBER: P1296410

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DLD1WMH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.6	9.7
10°-20°	147.9	23.4
20°-30°	166.7	26.4
30°-40°	133.1	21.1
40°-50°	68.4	10.8
50°-60°	25.7	4.1
60°-70°	16.9	2.7
70°-80°	9.1	1.4
80°-90°	2.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	376.1	59.5
0°-40°	509.2	80.6
0°-60°	603.4	95.5
0°-90°	632.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	632.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	681	
5°	663	62
15°	532	148
25°	364	167
35°	214	133
45°	87	68
55°	26	26
65°	17	17
75°	8	9
85°	2	3
90°	0	

TEST NUMBER: P1296410

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DLD1WMH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	680.9
1°	680.9
2°	678.6
3°	674.7
4°	669.3
5°	663.1
6°	655.3
7°	645.2
8°	634.4
9°	622.0
10°	609.6
11°	595.6
12°	580.9
13°	565.4
14°	549.1
15°	532.0
17.5°	488.6
20°	445.2
22.5°	403.3
25°	363.7
27.5°	324.9
30°	288.5
32.5°	251.3
35°	214.0
37.5°	177.6
40°	143.5
42.5°	113.2
45°	86.9
47.5°	64.4
50°	45.0
52.5°	31.8
55°	26.4
57.5°	24.0
60°	21.7
62.5°	19.4
65°	17.1
67.5°	14.7
70°	12.4
72.5°	10.1
75°	8.5
77.5°	7.0
80°	5.4
82.5°	3.9
85°	2.3
87.5°	0.8



TEST NUMBER: P1296410

CATALOG NUMBER: P3A13R30W2N902750DE010 E3DLD1WMH_4000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)