

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296537

Luminaire Tested: P3A13R30W2N902765DE010 E3DL1LI_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296537
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R30W2N902765DE010 E3DL1LI_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3500K CCT AND, 90CRI ,
E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 821.0 lumens
Efficiency: N/A
Efficacy: 66.7 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296537

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DL1LI_3500K

Luminous Intensity Polar Plot

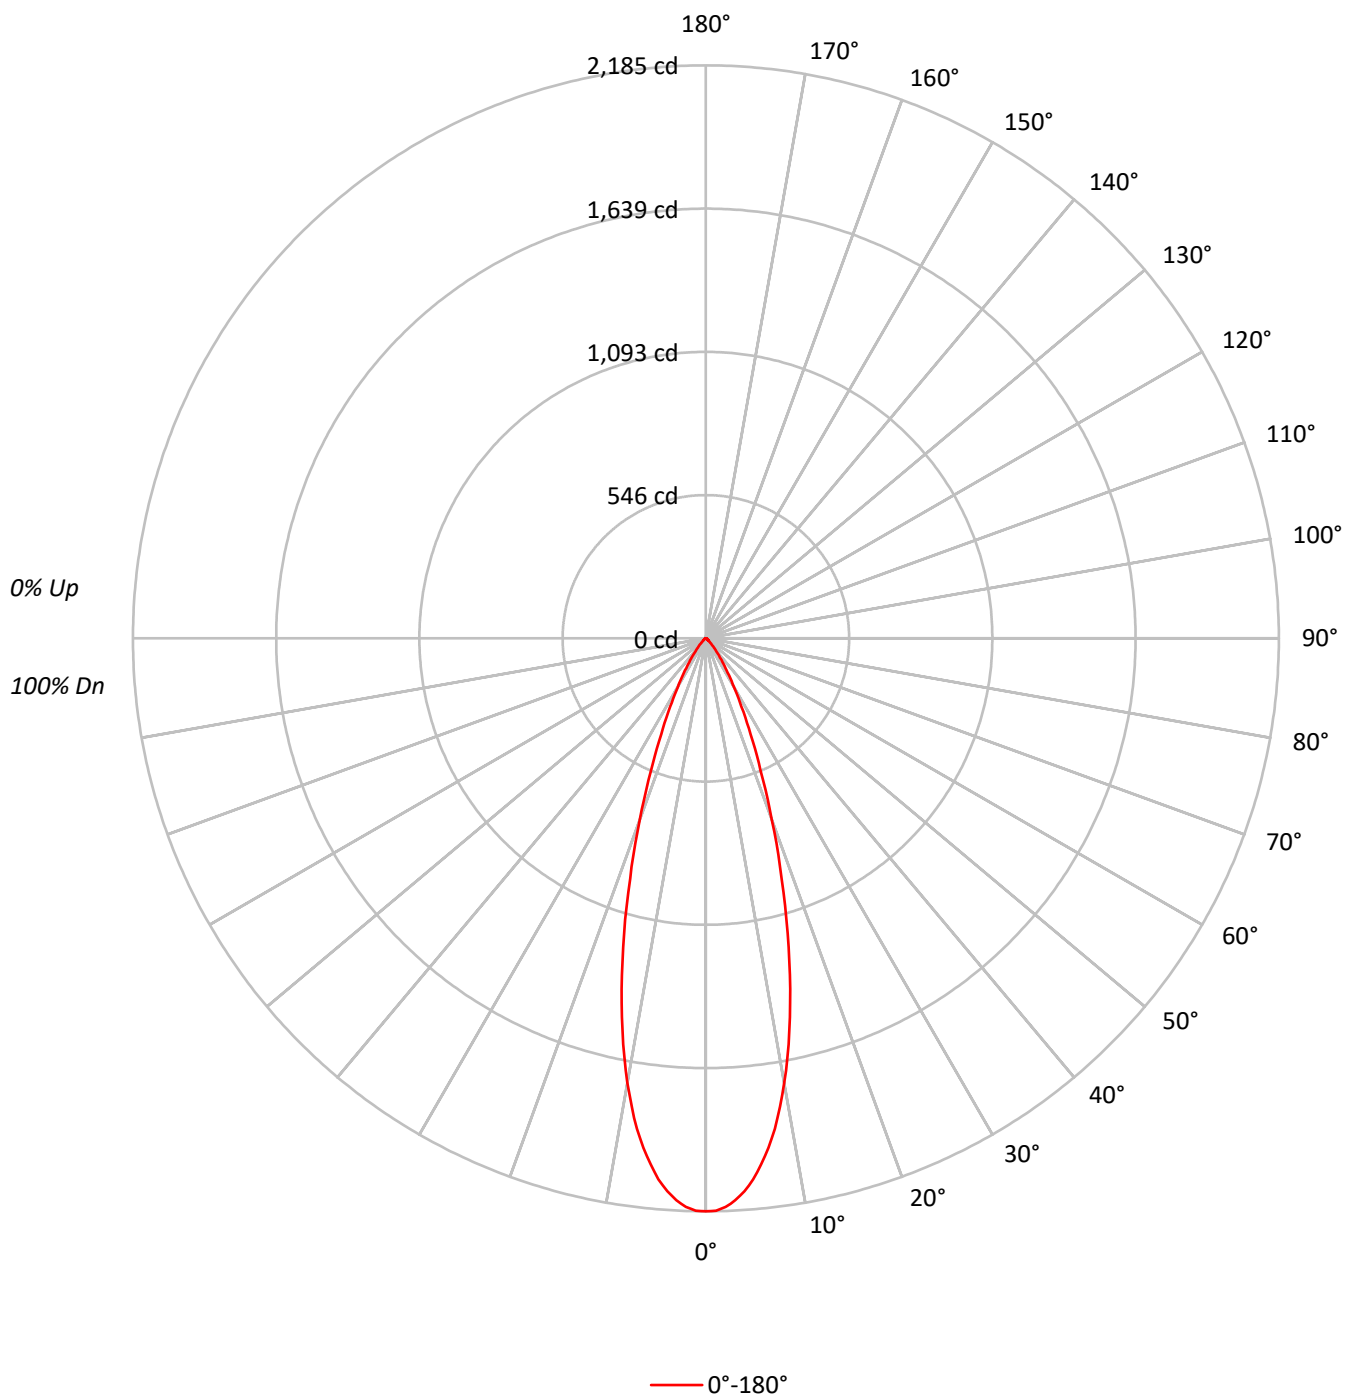



TEST NUMBER: P1296537

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DL1LI_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	105	102	99		107	104	101	98		101	98	96		98	96	94		95	93	92
3	105	100	96	92		103	98	95	91		96	93	90		94	91	89		91	89	87
4	101	95	90	87		99	94	89	86		92	88	85		90	87	84		88	85	83
5	97	90	85	82		96	89	85	81		88	84	81		86	83	80		85	82	79
6	94	86	81	78		92	85	81	77		84	80	77		83	79	76		81	78	76
7	90	82	77	74		89	82	77	74		81	76	73		80	76	73		78	75	73
8	87	79	74	71		86	79	74	71		78	73	70		77	73	70		76	72	70
9	84	76	71	68		83	75	71	68		75	70	67		74	70	67		73	70	67
10	81	73	68	65		80	73	68	65		72	68	65		71	67	65		71	67	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	479084
5°	455975
10°	383538
15°	276596
20°	171562
25°	97578
30°	54211
35°	29473
40°	15543
45°	8404
50°	4503
55°	2982
60°	2719
65°	2802
70°	2500
75°	1949
80°	2020
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 8404 cd/sqm

TEST NUMBER: P1296537

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DL1LI_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.5	22.7
10°-20°	331.6	40.4
20°-30°	191.6	23.3
30°-40°	72.7	8.9
40°-50°	22.3	2.7
50°-60°	7.5	0.9
60°-70°	5.1	0.6
70°-80°	2.8	0.3
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	709.7	86.4
0°-40°	782.5	95.3
0°-60°	812.3	98.9
0°-90°	821.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	821.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2185	
5°	2072	187
15°	1218	332
25°	403	192
35°	110	73
45°	27	22
55°	8	8
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1296537

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DL1LI_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2184.8
1°	2183.2
2°	2170.0
3°	2145.2
4°	2114.2
5°	2071.5
6°	2017.3
7°	1956.8
8°	1889.3
9°	1808.6
10°	1722.5
11°	1629.5
12°	1531.0
13°	1427.8
14°	1323.1
15°	1218.4
17.5°	960.9
20°	735.2
22.5°	545.2
25°	403.3
27.5°	293.2
30°	214.1
32.5°	154.3
35°	110.1
37.5°	76.8
40°	54.3
42.5°	38.0
45°	27.1
47.5°	18.6
50°	13.2
52.5°	9.3
55°	7.8
57.5°	7.0
60°	6.2
62.5°	5.4
65°	5.4
67.5°	4.7
70°	3.9
72.5°	3.1
75°	2.3
77.5°	2.3
80°	1.6
82.5°	1.6
85°	0.8
87.5°	0.0



TEST NUMBER: P1296537

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DL1LI_3500K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)