

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296614

Luminaire Tested: P3A13R30W2N902765DE010 E3DLP1MW_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296614
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R30W2N902765DE010 E3DLP1MW_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3000K CCT AND, 90CRI ,
E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 493.0 lumens
Efficiency: N/A
Efficacy: 40.1 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296614

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DLP1MW_3000K

Luminous Intensity Polar Plot

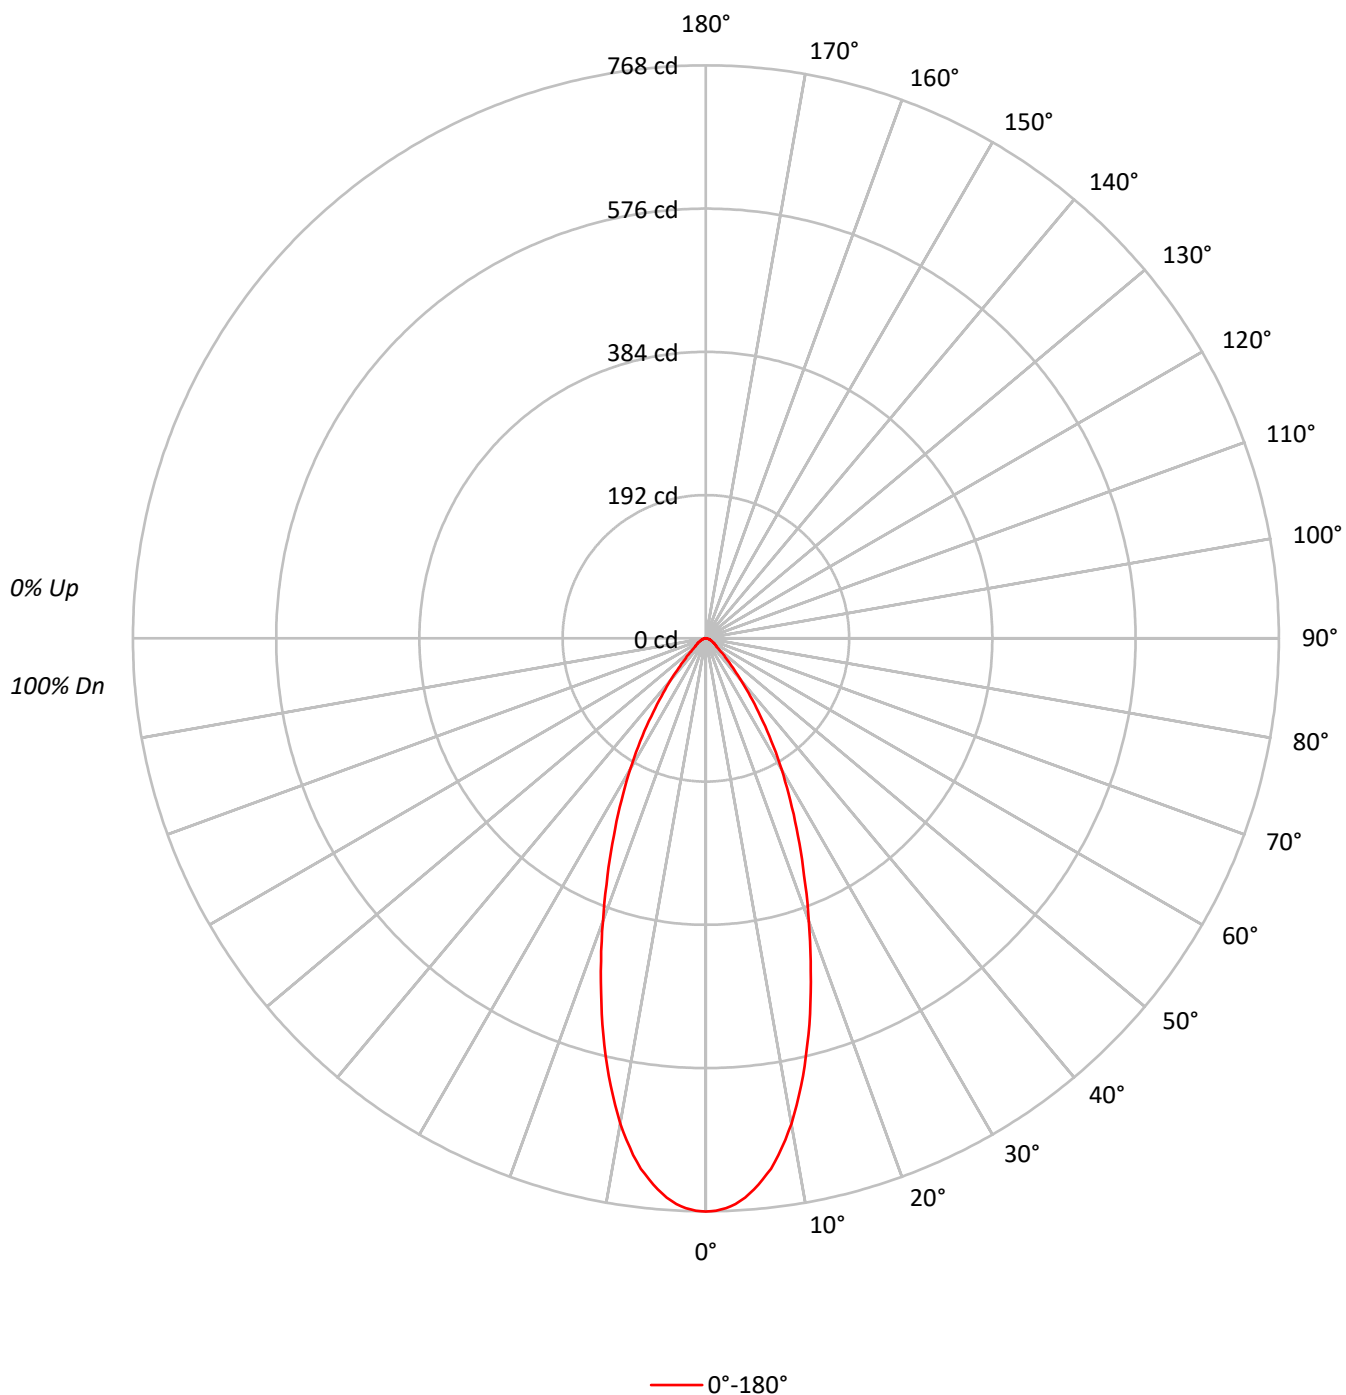

TEST NUMBER: P1296614

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DLP1MW_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82
5	92	84	78	73	90	83	77	73	81	76	72		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	74	68	64	72	67	63		71	67	63		70
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67
9	76	67	61	57	75	66	60	57	65	60	56		64	60	56		63
10	73	63	58	54	72	63	57	54	62	57	54		61	57	53		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	168473
5°	163218
10°	147069
15°	121658
20°	94182
25°	70649
30°	51299
35°	34184
40°	21011
45°	12342
50°	7573
55°	6155
60°	5350
65°	4358
70°	3911
75°	3897
80°	2904
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12342 cd/sqm

TEST NUMBER: P1296614

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DLP1MW_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.2	13.8
10°-20°	147.6	29.9
20°-30°	134.3	27.2
30°-40°	81.2	16.5
40°-50°	32.6	6.6
50°-60°	14.4	2.9
60°-70°	8.7	1.8
70°-80°	4.7	1.0
80°-90°	1.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	350.1	71.0
0°-40°	431.2	87.5
0°-60°	478.2	97.0
0°-90°	493.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	493.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	768	
5°	742	68
15°	536	148
25°	292	134
35°	128	81
45°	40	33
55°	16	14
65°	8	9
75°	5	5
85°	2	1
90°	0	



TEST NUMBER: P1296614

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DLP1MW_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	768.3
1°	767.5
2°	764.5
3°	759.1
4°	751.5
5°	741.5
6°	729.3
7°	716.3
8°	699.5
9°	680.4
10°	660.5
11°	637.6
12°	613.1
13°	588.6
14°	561.9
15°	535.9
17.5°	467.8
20°	403.6
22.5°	344.0
25°	292.0
27.5°	244.6
30°	202.6
32.5°	163.6
35°	127.7
37.5°	97.8
40°	73.4
42.5°	53.5
45°	39.8
47.5°	29.8
50°	22.2
52.5°	17.6
55°	16.1
57.5°	13.8
60°	12.2
62.5°	9.9
65°	8.4
67.5°	7.6
70°	6.1
72.5°	5.4
75°	4.6
77.5°	3.8
80°	2.3
82.5°	1.5
85°	1.5
87.5°	0.8



TEST NUMBER: P1296614

CATALOG NUMBER: P3A13R30W2N902765DE010 E3DLP1MW_3000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)