

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296903

Luminaire Tested: P3A13R35W2N902765DE010 E3DLP1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296903
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R35W2N902765DE010 E3DLP1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 2700K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 220.0 lumens
Efficiency: N/A
Efficacy: 17.9 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296903

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1GPH_2700K

Luminous Intensity Polar Plot

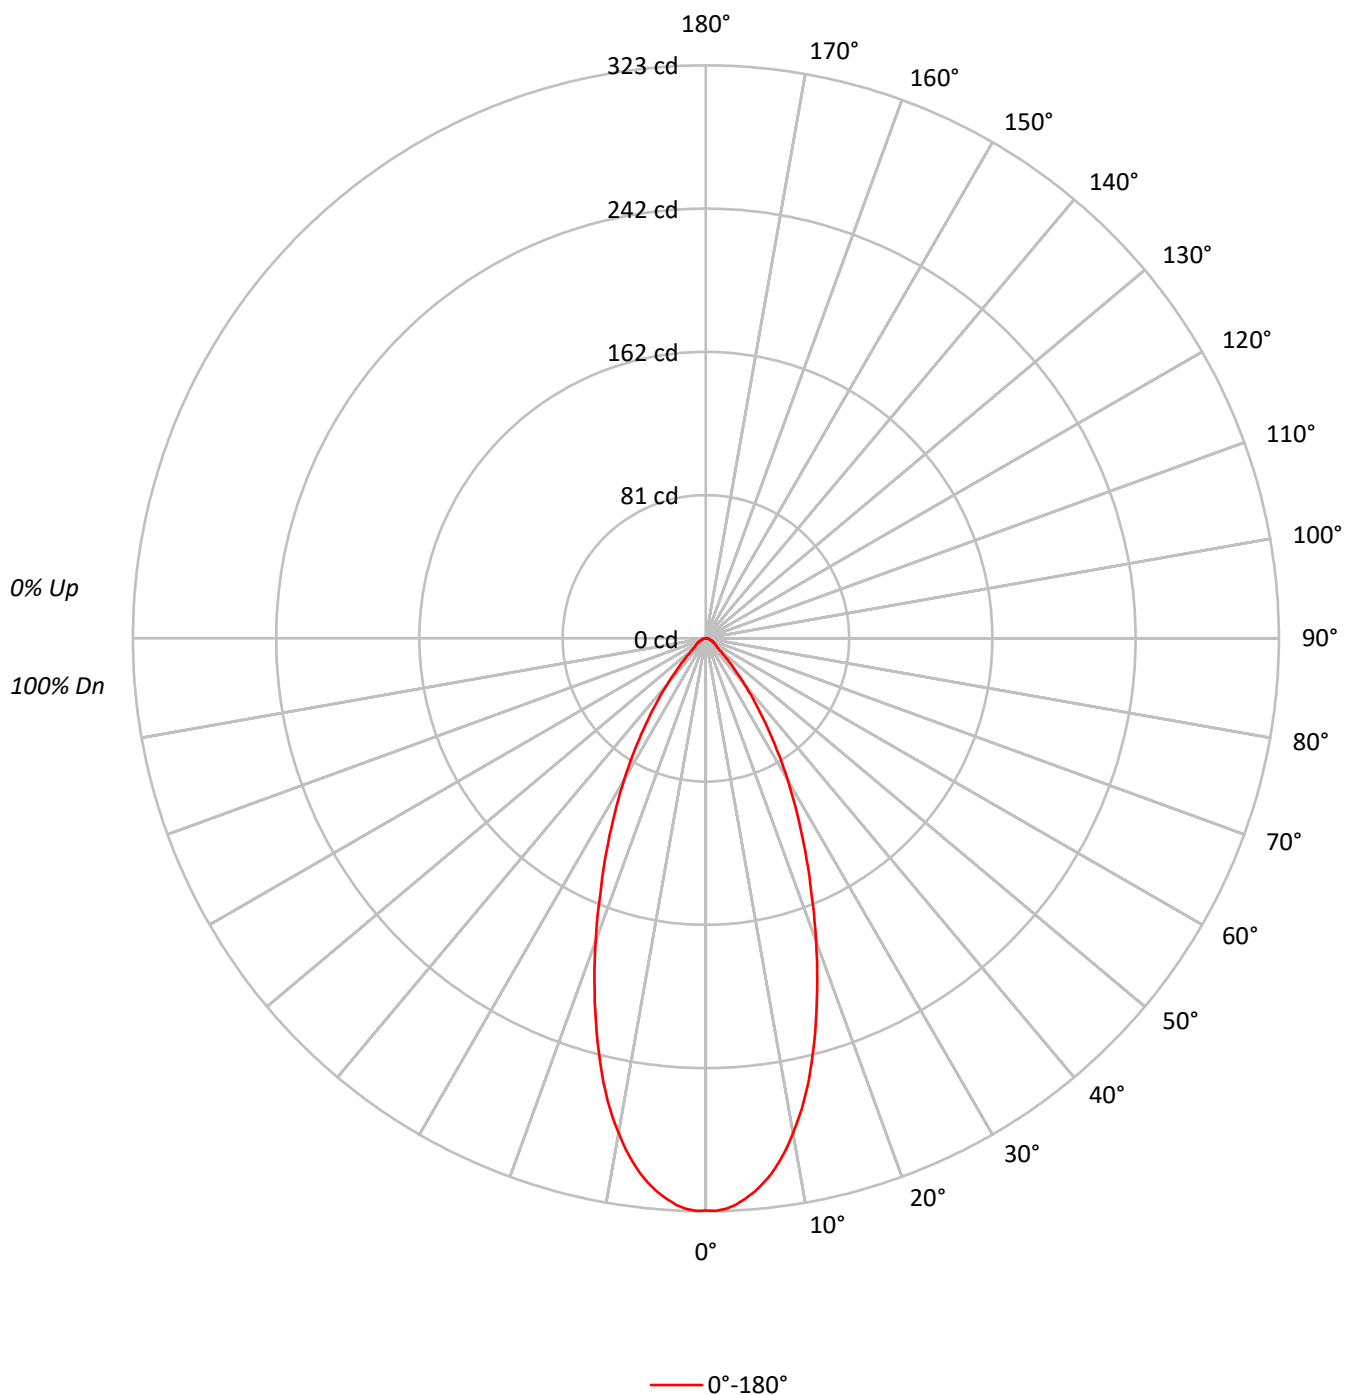



TEST NUMBER: P1296903

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	70718
5°	68963
10°	63058
15°	53530
20°	42377
25°	32034
30°	23320
35°	15767
40°	9704
45°	5582
50°	3343
55°	2714
60°	2368
65°	2127
70°	1731
75°	1694
80°	1768
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5582 cd/sqm

TEST NUMBER: P1296903

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.0	13.2
10°-20°	65.0	29.5
20°-30°	60.8	27.6
30°-40°	37.2	16.9
40°-50°	14.7	6.7
50°-60°	6.4	2.9
60°-70°	4.0	1.8
70°-80°	2.2	1.0
80°-90°	0.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	154.8	70.3
0°-40°	192.0	87.3
0°-60°	213.1	96.9
0°-90°	220.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	220.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	322	
5°	313	29
15°	236	65
25°	132	61
35°	59	37
45°	18	15
55°	7	6
65°	4	4
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1296903

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	322.5
1°	322.8
2°	321.8
3°	319.8
4°	316.7
5°	313.3
6°	308.9
7°	303.9
8°	297.8
9°	291.0
10°	283.2
11°	275.1
12°	266.3
13°	256.8
14°	246.3
15°	235.8
17.5°	208.7
20°	181.6
22.5°	155.5
25°	132.4
27.5°	111.1
30°	92.1
32.5°	74.5
35°	58.9
37.5°	45.1
40°	33.9
42.5°	24.4
45°	18.0
47.5°	12.9
50°	9.8
52.5°	8.1
55°	7.1
57.5°	6.1
60°	5.4
62.5°	4.7
65°	4.1
67.5°	3.4
70°	2.7
72.5°	2.4
75°	2.0
77.5°	1.7
80°	1.4
82.5°	1.0
85°	0.7
87.5°	0.3



TEST NUMBER: P1296903

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1GPH_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)