

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296937

Luminaire Tested: P3A13R35W2N902765DE010 E3DLP1WMH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296937
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R35W2N902765DE010 E3DLP1WMH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 5000K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 500.0 lumens
Efficiency: N/A
Efficacy: 40.7 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296937

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1WMH_5000K

Luminous Intensity Polar Plot

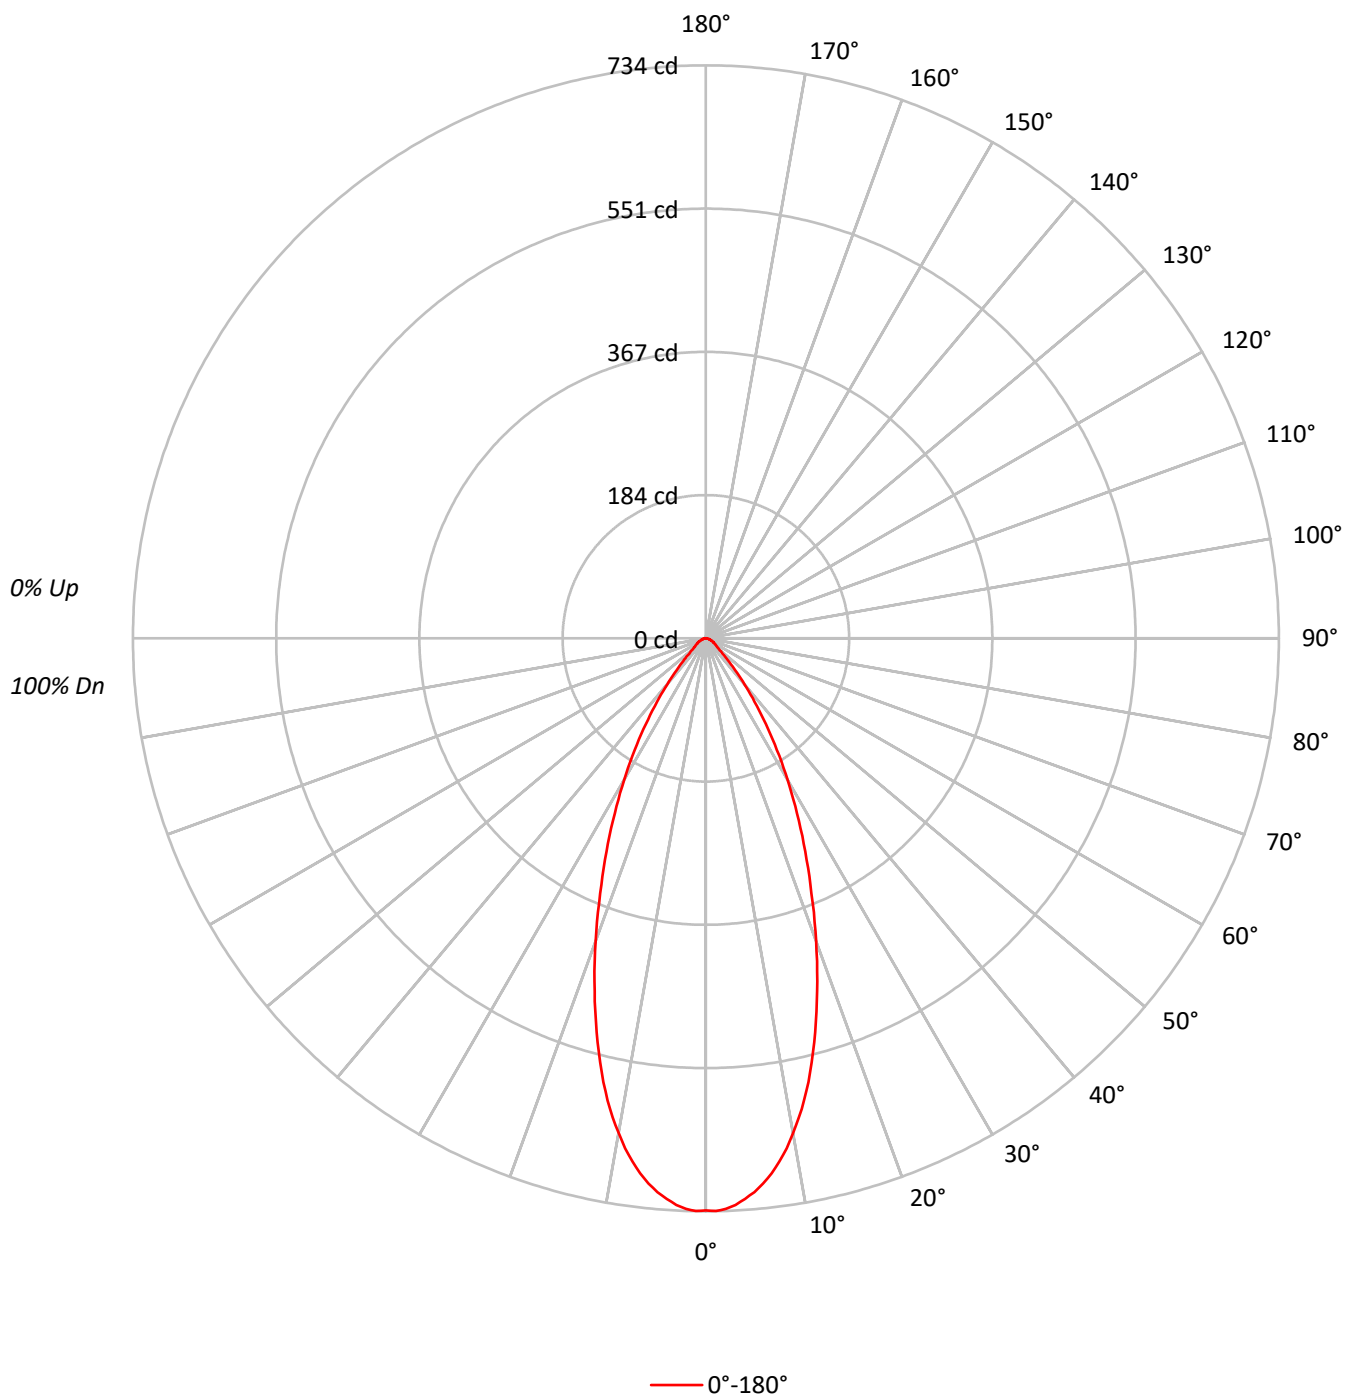

TEST NUMBER: P1296937

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1WMH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	160711
5°	156746
10°	143306
15°	121635
20°	96282
25°	72827
30°	53021
35°	35871
40°	22041
45°	12652
50°	7607
55°	6193
60°	5394
65°	4774
70°	3975
75°	3897
80°	3915
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12652 cd/sqm

TEST NUMBER: P1296937

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1WMH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.8	13.2
10°-20°	147.7	29.5
20°-30°	138.2	27.6
30°-40°	84.6	16.9
40°-50°	33.3	6.7
50°-60°	14.7	2.9
60°-70°	9.1	1.8
70°-80°	4.9	1.0
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	351.7	70.3
0°-40°	436.3	87.3
0°-60°	484.3	96.9
0°-90°	500.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	500.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	733	
5°	712	66
15°	536	148
25°	301	138
35°	134	85
45°	41	33
55°	16	15
65°	9	9
75°	5	5
85°	2	2
90°	0	

TEST NUMBER: P1296937

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1WMH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	732.9
1°	733.7
2°	731.4
3°	726.8
4°	719.8
5°	712.1
6°	702.1
7°	690.6
8°	676.7
9°	661.3
10°	643.6
11°	625.1
12°	605.1
13°	583.6
14°	559.7
15°	535.8
17.5°	474.2
20°	412.6
22.5°	353.4
25°	301.0
27.5°	252.5
30°	209.4
32.5°	169.4
35°	134.0
37.5°	102.4
40°	77.0
42.5°	55.4
45°	40.8
47.5°	29.3
50°	22.3
52.5°	18.5
55°	16.2
57.5°	13.9
60°	12.3
62.5°	10.8
65°	9.2
67.5°	7.7
70°	6.2
72.5°	5.4
75°	4.6
77.5°	3.8
80°	3.1
82.5°	2.3
85°	1.5
87.5°	0.8



TEST NUMBER: P1296937

CATALOG NUMBER: P3A13R35W2N902765DE010 E3DLP1WMH_5000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)