

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297384

Luminaire Tested: P3A13R45W2N902750DE010 E3DLP1LI\_4000K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1297384  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A13R45W2N902750DE010 E3DLP1LI\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 4000K CCT AND, 90CRI ,  
E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 560.0 lumens  
Efficiency: N/A  
Efficacy: 45.5 lumens/watt  
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1297384

CATALOG NUMBER: P3A13R45W2N902750DE010 E3DLP1LI\_4000K

### Luminous Intensity Polar Plot

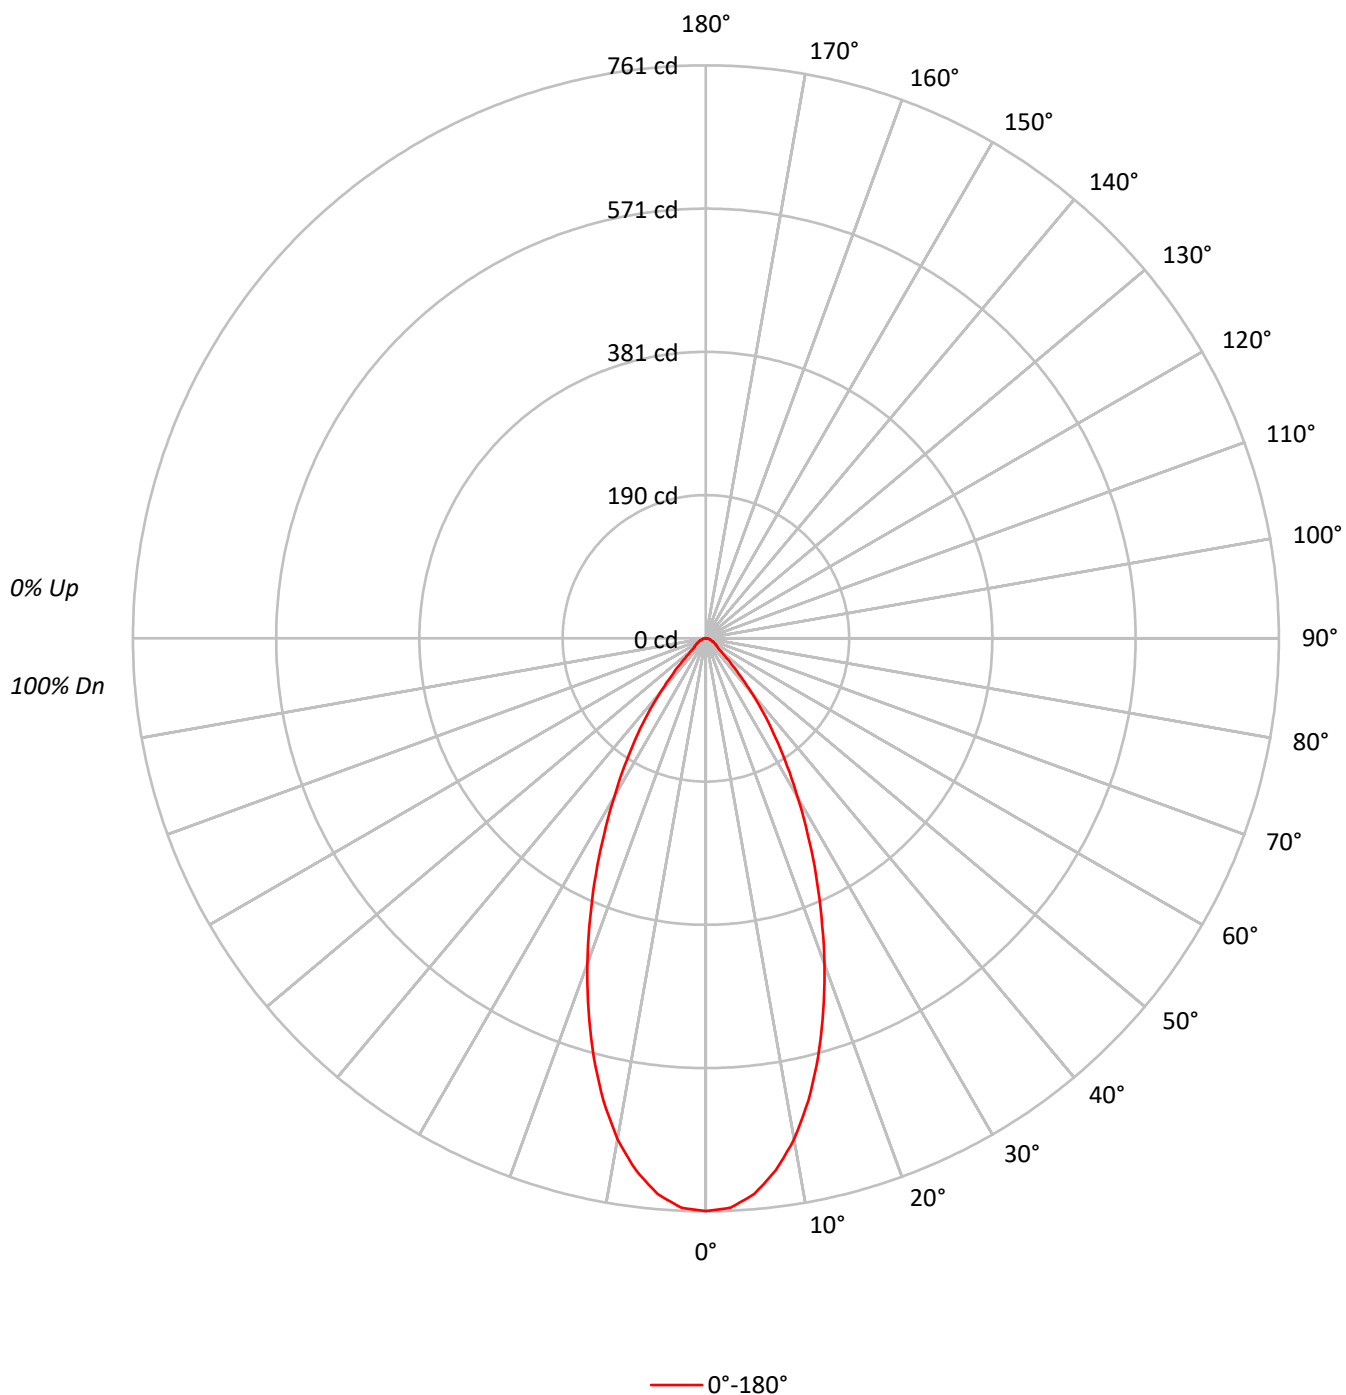



TEST NUMBER: P1297384

CATALOG NUMBER: P3A13R45W2N902750DE010 E3DLP1LI\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 | 100 |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 |  | 100 | 99  | 97  |  | 97  | 96  | 94  | 93  |
| 2   | 107 | 102 | 98  | 94  | 105 | 100 | 96  | 93  | 97  | 94  | 91  |  | 94  | 91  | 89  |  | 91  | 89  | 87  | 86  |
| 3   | 102 | 95  | 90  | 85  | 100 | 93  | 89  | 85  | 91  | 87  | 83  |  | 88  | 85  | 82  |  | 86  | 83  | 81  | 79  |
| 4   | 96  | 88  | 83  | 78  | 94  | 87  | 82  | 78  | 85  | 81  | 77  |  | 83  | 79  | 76  |  | 81  | 78  | 75  | 74  |
| 5   | 91  | 83  | 77  | 72  | 90  | 82  | 76  | 72  | 80  | 75  | 71  |  | 78  | 74  | 71  |  | 77  | 73  | 70  | 69  |
| 6   | 87  | 78  | 72  | 67  | 85  | 77  | 71  | 67  | 75  | 70  | 66  |  | 74  | 69  | 66  |  | 73  | 69  | 66  | 64  |
| 7   | 83  | 73  | 67  | 63  | 81  | 72  | 67  | 63  | 71  | 66  | 62  |  | 70  | 65  | 62  |  | 69  | 65  | 61  | 60  |
| 8   | 79  | 69  | 63  | 59  | 77  | 68  | 63  | 59  | 67  | 62  | 58  |  | 66  | 62  | 58  |  | 65  | 61  | 58  | 56  |
| 9   | 75  | 65  | 59  | 55  | 74  | 65  | 59  | 55  | 64  | 59  | 55  |  | 63  | 58  | 55  |  | 62  | 58  | 55  | 53  |
| 10  | 72  | 62  | 56  | 52  | 71  | 61  | 56  | 52  | 61  | 55  | 52  |  | 60  | 55  | 52  |  | 59  | 55  | 52  | 50  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 166807 |
| 5°  | 162998 |
| 10° | 150365 |
| 15° | 130739 |
| 20° | 107413 |
| 25° | 83569  |
| 30° | 61706  |
| 35° | 43420  |
| 40° | 27108  |
| 45° | 14668  |
| 50° | 7949   |
| 55° | 6843   |
| 60° | 6140   |
| 65° | 5241   |
| 70° | 4488   |
| 75° | 4575   |
| 80° | 3915   |
| 85° | 4026   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 14668 cd/sqm

TEST NUMBER: P1297384

CATALOG NUMBER: P3A13R45W2N902750DE010 E3DLP1LI\_4000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 68.6   | 12.2      |
| 10°-20°   | 159.2  | 28.4      |
| 20°-30°   | 158.1  | 28.2      |
| 30°-40°   | 101.8  | 18.2      |
| 40°-50°   | 39.2   | 7.0       |
| 50°-60°   | 16.0   | 2.8       |
| 60°-70°   | 10.1   | 1.8       |
| 70°-80°   | 5.4    | 1.0       |
| 80°-90°   | 1.7    | 0.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 385.9  | 68.9      |
| 0°-40°    | 487.6  | 87.1      |
| 0°-60°    | 542.8  | 96.9      |
| 0°-90°    | 560.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 560.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 761 |      |
| 5°  | 740 | 69   |
| 15° | 576 | 159  |
| 25° | 345 | 158  |
| 35° | 162 | 102  |
| 45° | 47  | 39   |
| 55° | 18  | 16   |
| 65° | 10  | 10   |
| 75° | 5   | 5    |
| 85° | 2   | 2    |
| 90° | 0   |      |

TEST NUMBER: P1297384

CATALOG NUMBER: P3A13R45W2N902750DE010 E3DLP1LI\_4000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 760.7 |
| 2.5°  | 756.8 |
| 5°    | 740.5 |
| 7.5°  | 712.6 |
| 10°   | 675.3 |
| 12.5° | 628.7 |
| 15°   | 575.9 |
| 17.5° | 518.5 |
| 20°   | 460.3 |
| 22.5° | 401.3 |
| 25°   | 345.4 |
| 27.5° | 292.6 |
| 30°   | 243.7 |
| 32.5° | 201.0 |
| 35°   | 162.2 |
| 37.5° | 127.3 |
| 40°   | 94.7  |
| 42.5° | 68.3  |
| 45°   | 47.3  |
| 47.5° | 31.8  |
| 50°   | 23.3  |
| 52.5° | 19.4  |
| 55°   | 17.9  |
| 57.5° | 15.5  |
| 60°   | 14.0  |
| 62.5° | 11.6  |
| 65°   | 10.1  |
| 67.5° | 8.5   |
| 70°   | 7.0   |
| 72.5° | 6.2   |
| 75°   | 5.4   |
| 77.5° | 3.9   |
| 80°   | 3.1   |
| 82.5° | 2.3   |
| 85°   | 1.6   |
| 87.5° | 0.8   |
| 90°   | 0.0   |

(END OF REPORT)