

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297600

Luminaire Tested: P3A13R50W2N902750DE010 E3D1WH_5000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1297600
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R50W2N902750DE010 E3D1WH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 5000K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1071.0 lumens
Efficiency: N/A
Efficacy: 87.1 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1297600

CATALOG NUMBER: P3A13R50W2N902750DE010 E3D1WH_5000K

Luminous Intensity Polar Plot

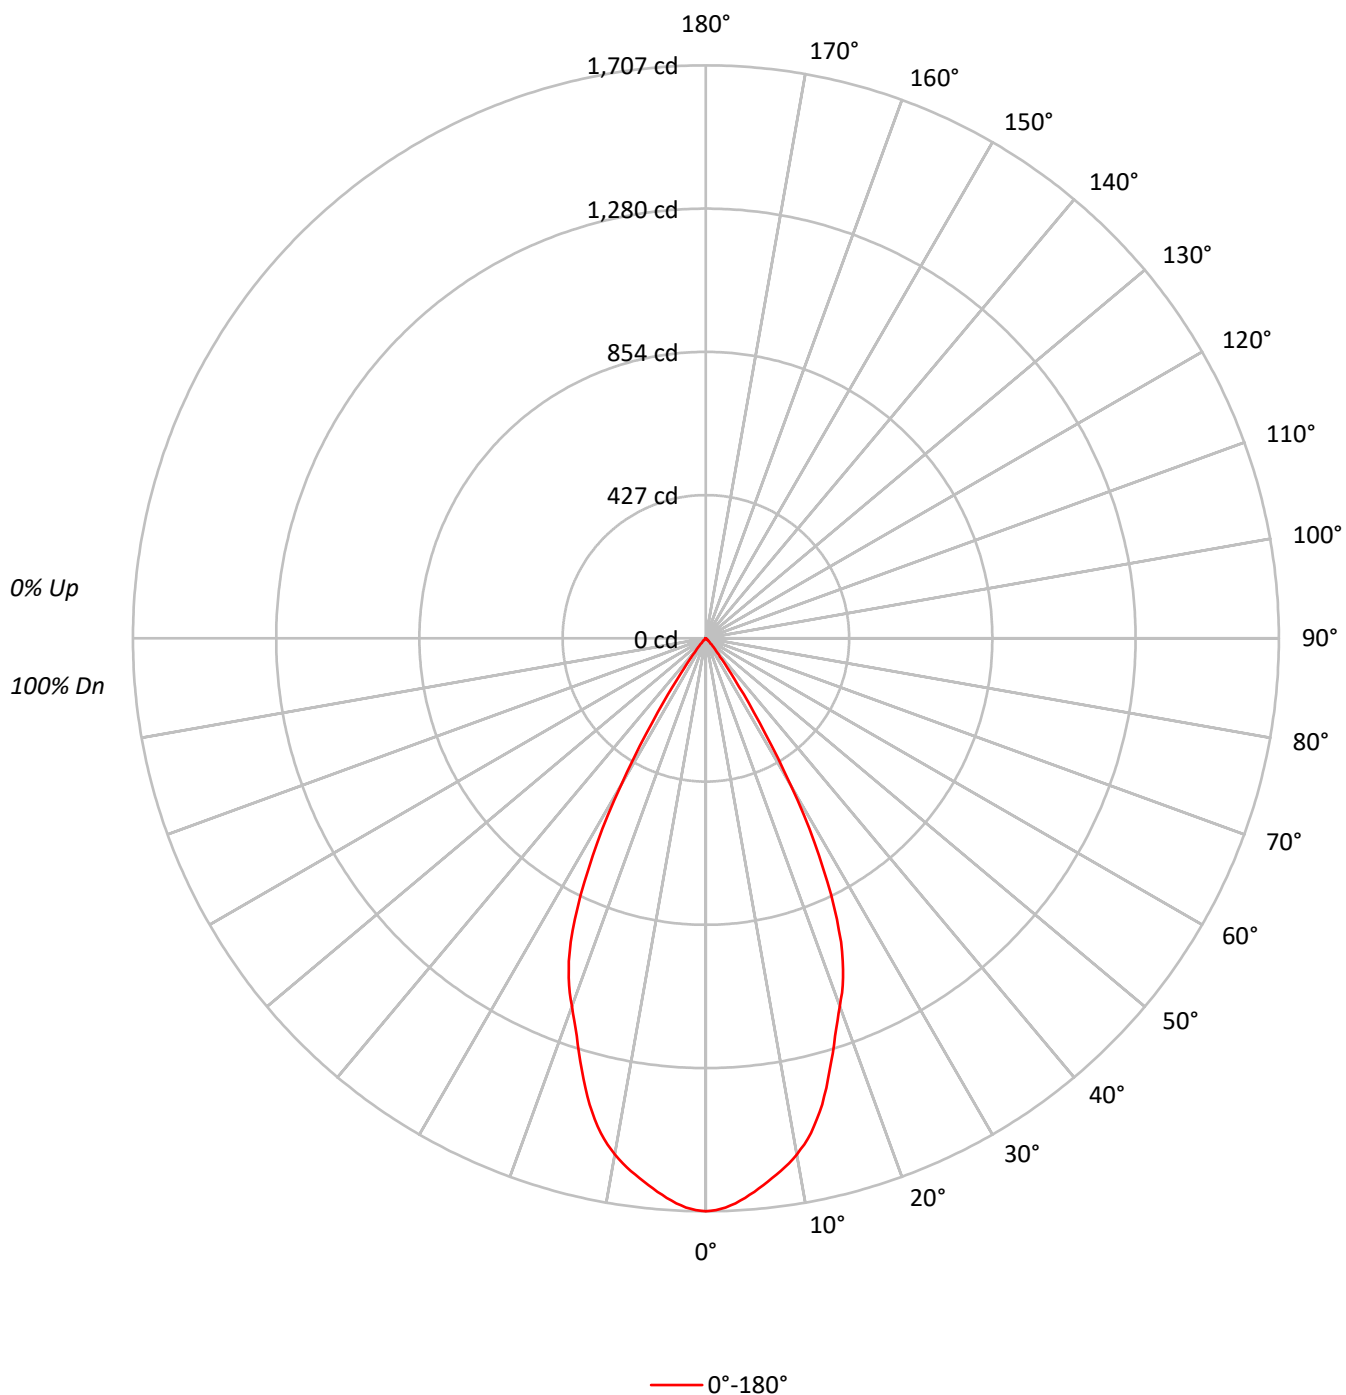



TEST NUMBER: P1297600

CATALOG NUMBER: P3A13R50W2N902750DE010 E3D1WH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	114	112	109	107		112	110	108	106		105	104	102		102	101	99		98	97	97		95			
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	93	91		90			
3	105	99	95	91		103	98	94	90		95	92	89		93	90	88		91	88	86		85			
4	100	94	89	85		99	92	88	85		90	87	84		88	85	83		87	84	82		80			
5	96	89	84	80		94	88	83	79		86	82	79		84	81	78		83	80	77		76			
6	92	84	79	75		91	83	78	75		82	78	74		81	77	74		79	76	73		72			
7	88	80	75	71		87	79	74	71		78	74	70		77	73	70		76	72	70		68			
8	84	76	71	67		83	76	71	67		75	70	67		74	69	66		73	69	66		65			
9	81	73	67	64		80	72	67	64		71	67	63		70	66	63		70	66	63		62			
10	78	69	64	61		77	69	64	61		68	64	60		67	63	60		67	63	60		59			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	374268
5°	364296
10°	347644
15°	314735
20°	272277
25°	223344
30°	128298
35°	39859
40°	10706
45°	3752
50°	887
55°	306
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3752 cd/sqm

TEST NUMBER: P1297600

CATALOG NUMBER: P3A13R50W2N902750DE010 E3D1WH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	155.0	14.5
10°-20°	384.1	35.9
20°-30°	403.7	37.7
30°-40°	115.6	10.8
40°-50°	11.3	1.1
50°-60°	0.9	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	942.9	88.0
0°-40°	1058.5	98.8
0°-60°	1070.7	100.0
0°-90°	1071.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1071.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1707	
5°	1655	155
15°	1386	384
25°	923	404
35°	149	116
45°	12	11
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1297600

CATALOG NUMBER: P3A13R50W2N902750DE010 E3D1WH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1706.8
1°	1704.2
2°	1696.6
3°	1685.7
4°	1670.9
5°	1655.0
6°	1638.0
7°	1619.9
8°	1602.9
9°	1583.3
10°	1561.3
11°	1536.0
12°	1506.9
13°	1470.7
14°	1431.4
15°	1386.4
16°	1338.8
17°	1292.7
18°	1245.4
19°	1203.9
20°	1166.8
21°	1131.3
22°	1090.9
23°	1044.4
24°	990.0
25°	923.1
26°	850.6
27°	769.7
28°	689.2
29°	602.3
30°	506.7
31°	417.2
32°	334.8
32.5°	298.9
33°	262.6
34°	201.4
35°	148.9
36°	109.2
37°	81.2
37.5°	70.3
38°	60.8
39°	47.2
40°	37.4
42.5°	21.2
45°	12.1



TEST NUMBER: P1297600

CATALOG NUMBER: P3A13R50W2N902750DE010 E3D1WH_5000K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	6.8
50°	2.6
52.5°	1.1
55°	0.8
57.5°	0.8
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)