

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297650

Luminaire Tested: P3A13R50W2N902750DE010 E3DLD1LI_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1297650
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R50W2N902750DE010 E3DLD1LI_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 5000K CCT AND, 90CRI ,
E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 676.0 lumens
Efficiency: N/A
Efficacy: 55.0 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1297650

CATALOG NUMBER: P3A13R50W2N902750DE010 E3DLD1LI_5000K

Luminous Intensity Polar Plot

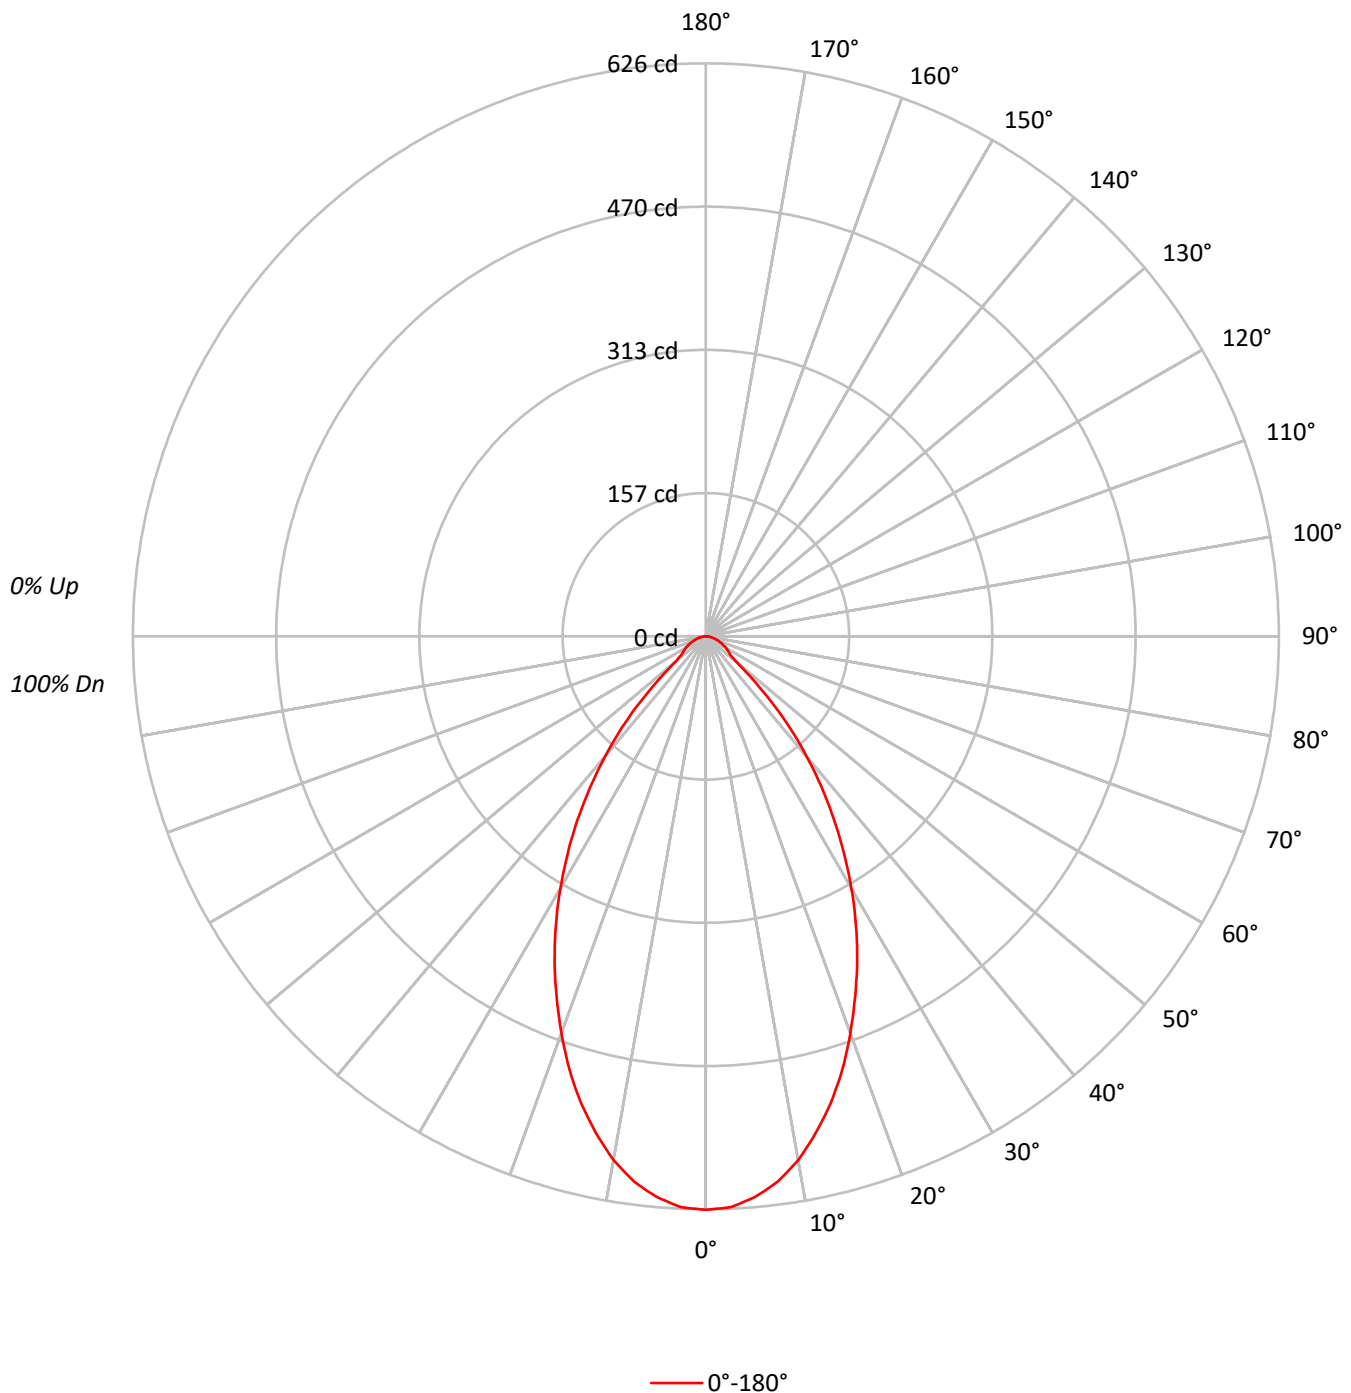

TEST NUMBER: P1297650

CATALOG NUMBER: P3A13R50W2N902750DE010 E3DLD1LI_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91		
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	83		
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75		
4	93	85	78	73	91	83	77	73	81	76	72	79	75	71	77	73	70	69		
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63		
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	59	58		
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	53		
8	74	63	57	52	73	63	56	52	61	56	52	60	55	51	59	55	51	50		
9	70	59	53	48	69	59	52	48	58	52	48	57	52	48	56	51	48	46		
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	45	43		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	137379
5°	135351
10°	129367
15°	119796
20°	107669
25°	94651
30°	80493
35°	65263
40°	49035
45°	31569
50°	15010
55°	11813
60°	11183
65°	10429
70°	9425
75°	8472
80°	7829
85°	7799

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 31569 cd/sqm

TEST NUMBER: P1297650

CATALOG NUMBER: P3A13R50W2N902750DE010 E3DLD1LI_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.6	8.5
10°-20°	147.1	21.8
20°-30°	178.8	26.4
30°-40°	151.6	22.4
40°-50°	78.8	11.7
50°-60°	28.4	4.2
60°-70°	19.7	2.9
70°-80°	10.7	1.6
80°-90°	3.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	383.5	56.7
0°-40°	535.1	79.2
0°-60°	642.3	95.0
0°-90°	676.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	676.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	626	
5°	615	58
15°	528	147
25°	391	179
35°	244	152
45°	102	79
55°	31	28
65°	20	20
75°	10	11
85°	3	3
90°	0	

TEST NUMBER: P1297650

CATALOG NUMBER: P3A13R50W2N902750DE010 E3DLD1LI_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	626.5
2.5°	624.2
5°	614.9
7.5°	601.0
10°	581.0
12.5°	555.5
15°	527.7
17.5°	496.1
20°	461.4
22.5°	425.9
25°	391.2
27.5°	354.9
30°	317.9
32.5°	280.8
35°	243.8
37.5°	207.5
40°	171.3
42.5°	136.6
45°	101.8
47.5°	67.9
50°	44.0
52.5°	33.9
55°	30.9
57.5°	27.8
60°	25.5
62.5°	22.4
65°	20.1
67.5°	17.0
70°	14.7
72.5°	12.3
75°	10.0
77.5°	7.7
80°	6.2
82.5°	4.6
85°	3.1
87.5°	1.5
90°	0.0

(END OF REPORT)