

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297786

Luminaire Tested: P3A13R50W2N902765DE010 E3DL1WH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1297786
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R50W2N902765DE010 E3DL1WH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 2700K CCT AND, 90CRI ,
E3DL1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 512.0 lumens
Efficiency: N/A
Efficacy: 41.6 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1297786

CATALOG NUMBER: P3A13R50W2N902765DE010 E3DL1WH_2700K

Luminous Intensity Polar Plot

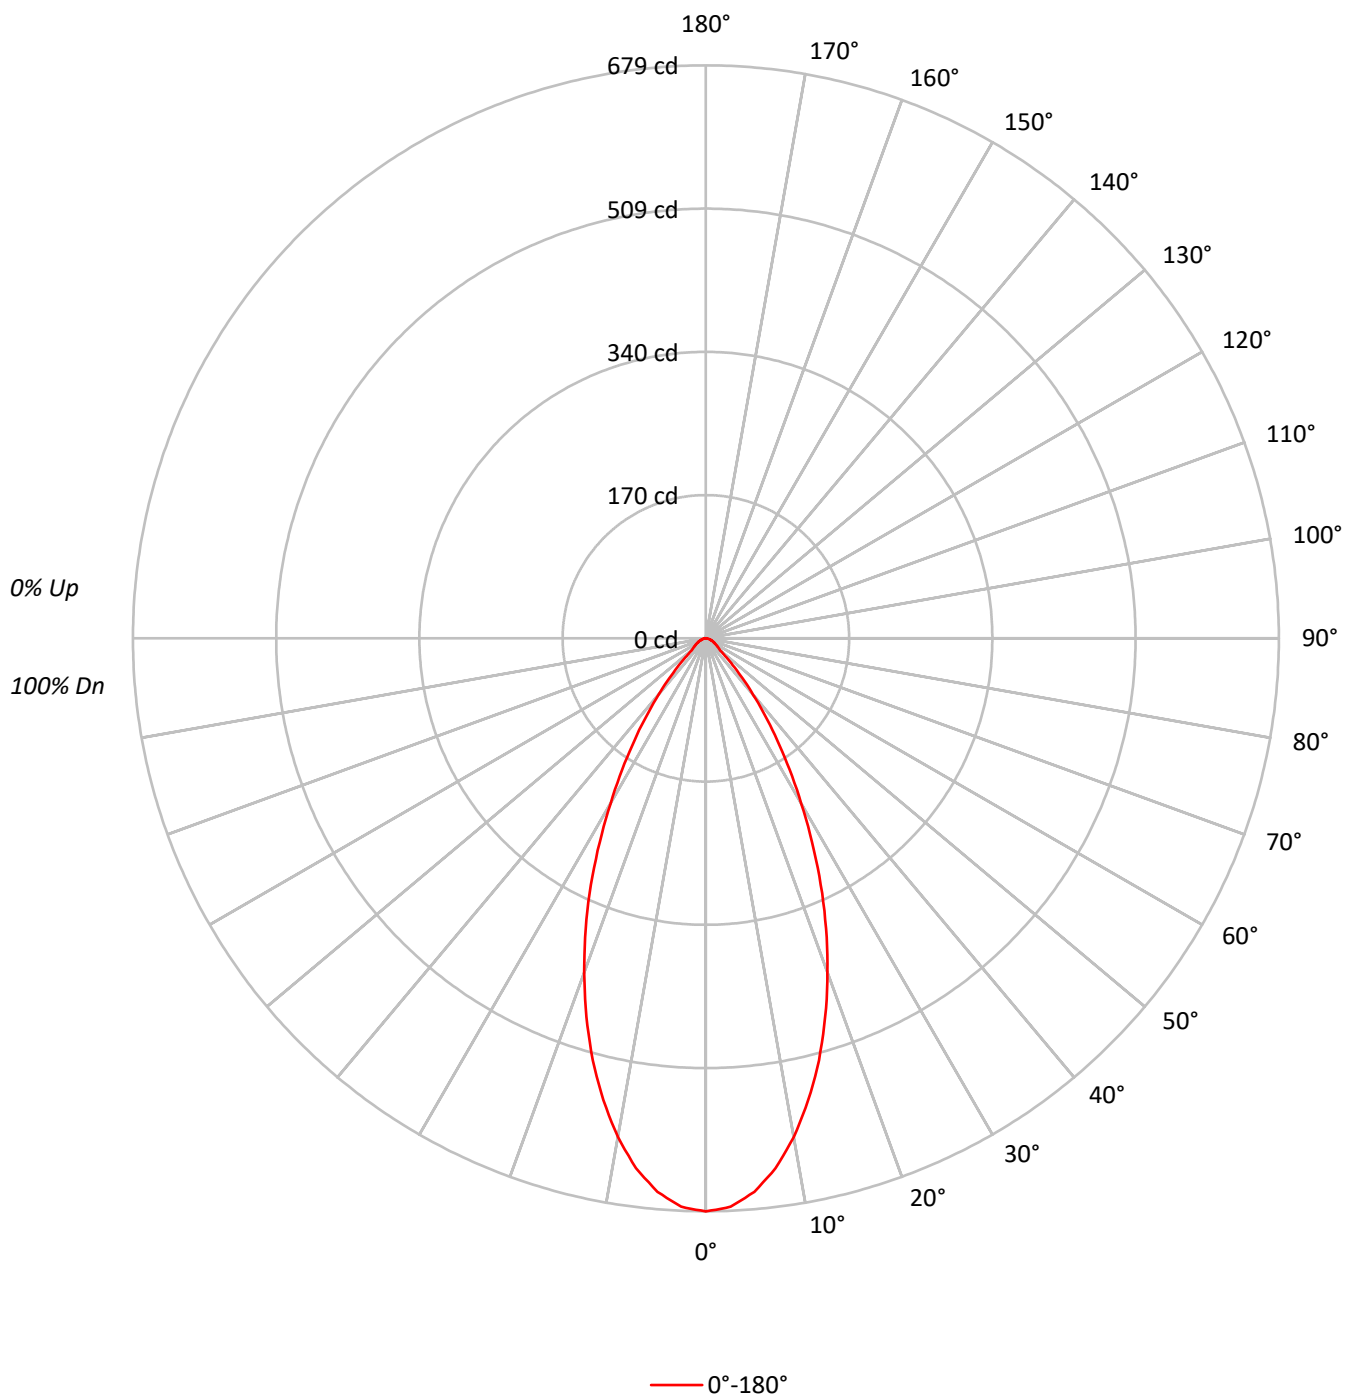

CATALOG NUMBER: P3A13R50W2N902765DE010 E3DL1WH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	113	110	107	105		111	108	106	103		104	102	100		100	99	97		97	95	94		93			
2	107	102	98	94		105	100	96	93		97	94	91		94	91	89		91	89	87		85			
3	101	95	89	85		99	93	88	85		91	87	83		88	85	82		86	83	81		79			
4	96	88	82	78		94	87	82	78		85	80	77		83	79	76		81	78	75		73			
5	91	83	76	72		90	82	76	72		80	75	71		78	74	70		77	73	70		68			
6	87	77	71	67		85	77	71	67		75	70	66		74	69	66		72	68	65		64			
7	82	73	67	62		81	72	66	62		71	66	62		70	65	61		68	64	61		60			
8	78	69	63	58		77	68	62	58		67	62	58		66	61	58		65	61	57		56			
9	75	65	59	55		74	64	59	55		63	58	55		63	58	54		62	57	54		53			
10	71	61	56	52		70	61	55	52		60	55	51		59	55	51		59	54	51		50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	148914
5°	144904
10°	133620
15°	117504
20°	98312
25°	77956
30°	57199
35°	39324
40°	24990
45°	13955
50°	7573
55°	6346
60°	5482
65°	5033
70°	4424
75°	4151
80°	3536
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Luminance: 13955 cd/sqm

TEST NUMBER: P1297786

CATALOG NUMBER: P3A13R50W2N902765DE010 E3DL1WH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.0	11.9
10°-20°	143.4	28.0
20°-30°	146.6	28.6
30°-40°	93.0	18.2
40°-50°	37.0	7.2
50°-60°	15.0	2.9
60°-70°	9.6	1.9
70°-80°	4.9	1.0
80°-90°	1.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	351.0	68.5
0°-40°	443.9	86.7
0°-60°	495.9	96.9
0°-90°	512.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	512.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	679	
5°	658	61
15°	518	143
25°	322	147
35°	147	93
45°	45	37
55°	17	15
65°	10	10
75°	5	5
85°	1	2
90°	0	

TEST NUMBER: P1297786

CATALOG NUMBER: P3A13R50W2N902765DE010 E3DL1WH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	679.1
2.5°	674.2
5°	658.3
7.5°	633.4
10°	600.1
12.5°	560.6
15°	517.6
17.5°	470.5
20°	421.3
22.5°	372.1
25°	322.2
27.5°	272.3
30°	225.9
32.5°	184.3
35°	146.9
37.5°	115.0
40°	87.3
42.5°	64.4
45°	45.0
47.5°	30.5
50°	22.2
52.5°	18.7
55°	16.6
57.5°	14.6
60°	12.5
62.5°	11.1
65°	9.7
67.5°	8.3
70°	6.9
72.5°	5.5
75°	4.9
77.5°	3.5
80°	2.8
82.5°	2.1
85°	1.4
87.5°	0.7
90°	0.0

(END OF REPORT)