

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298082

Luminaire Tested: P3A13R55W2N902765DE010 E3DL1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1298082
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R55W2N902765DE010 E3DL1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 3000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 408.0 lumens
Efficiency: N/A
Efficacy: 33.2 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1298082

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DL1GPH_3000K

Luminous Intensity Polar Plot

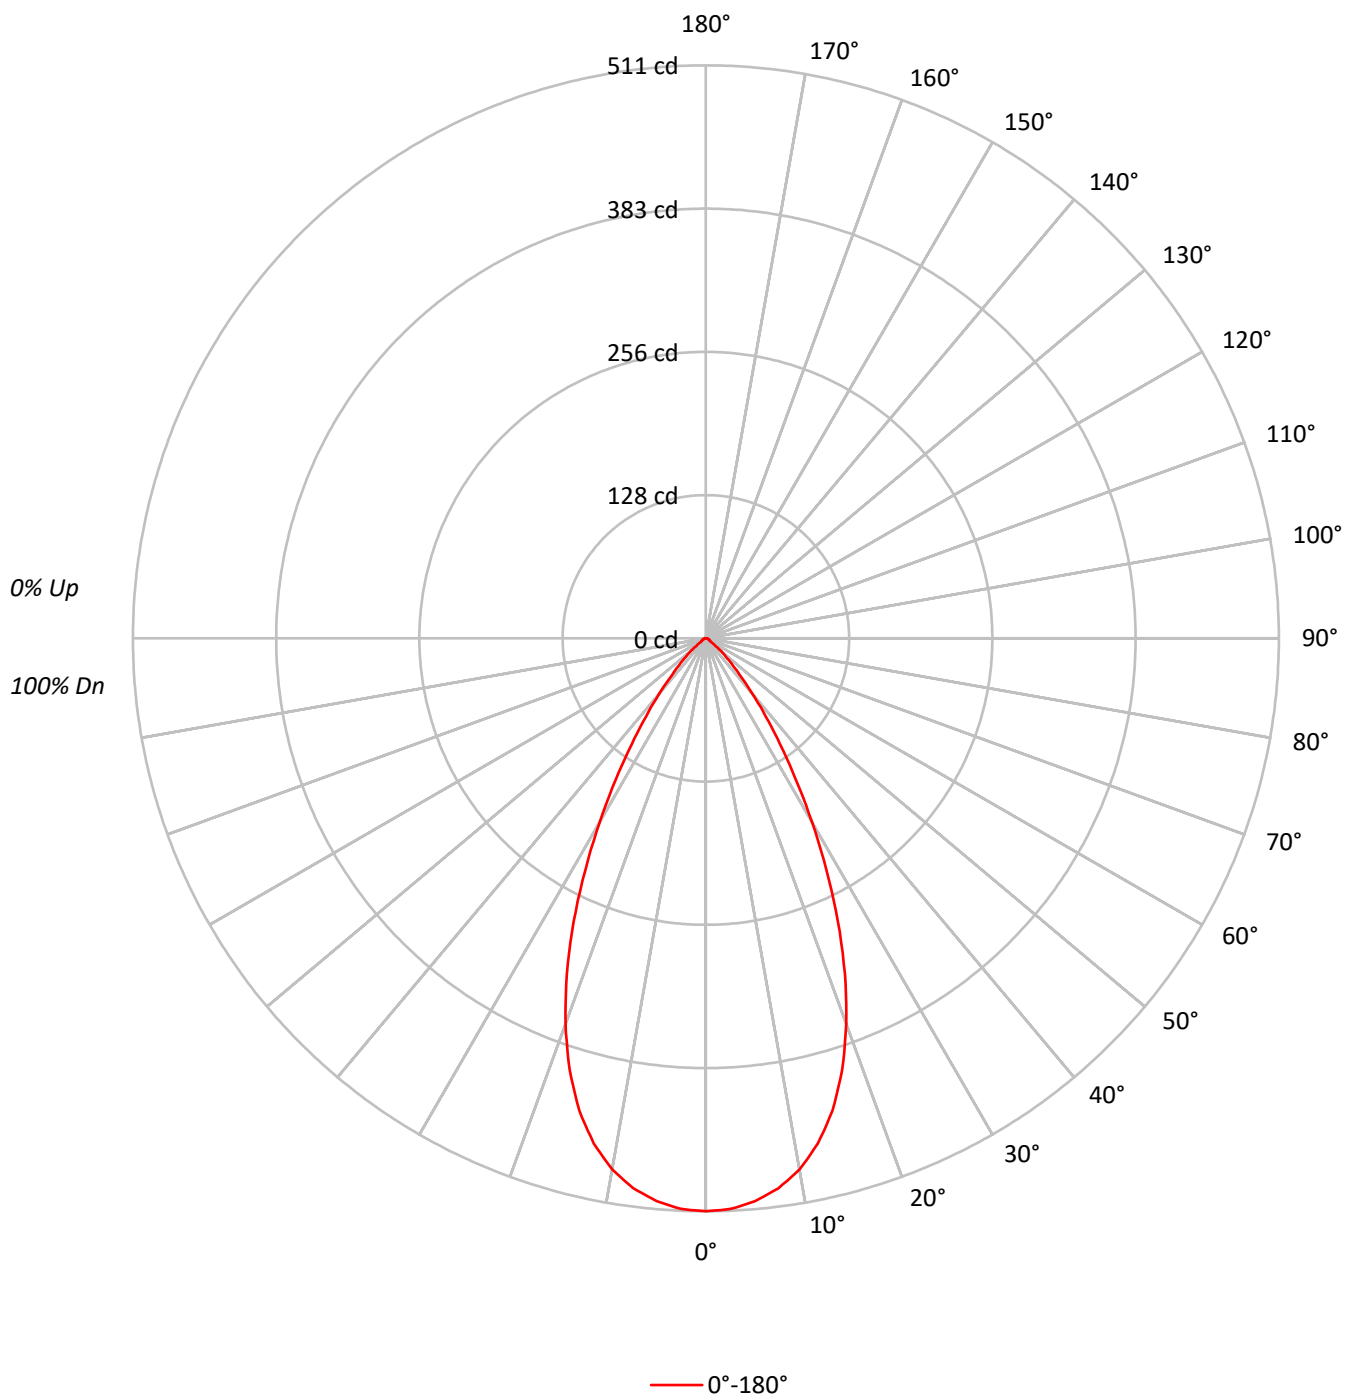

TEST NUMBER: P1298082

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DL1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97	96	95		93
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92	90	88		87
3	102	96	91	87	100	94	90	86	92	88	85		89	86	84		87	85	82		81
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		82	79	77		75
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78	75	72		70
6	88	79	73	69	86	78	73	68	77	72	68		75	71	68		74	70	67		66
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70	66	63		62
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67	62	59		58
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63	59	56		55
10	73	63	57	53	72	62	57	53	62	57	53		61	56	53		60	56	53		52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	112030
5°	110896
10°	107101
15°	99002
20°	85431
25°	67480
30°	47855
35°	30865
40°	18549
45°	10451
50°	5629
55°	1988
60°	1798
65°	1764
70°	1667
75°	1610
80°	1389
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 10451 cd/sqm

TEST NUMBER: P1298082

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DL1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.4	11.6
10°-20°	120.6	29.6
20°-30°	126.4	31.0
30°-40°	73.7	18.1
40°-50°	27.6	6.8
50°-60°	6.5	1.6
60°-70°	3.3	0.8
70°-80°	2.0	0.5
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	294.3	72.1
0°-40°	368.1	90.2
0°-60°	402.2	98.6
0°-90°	408.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	408.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	511	
5°	504	47
15°	436	121
25°	279	126
35°	115	74
45°	34	28
55°	5	6
65°	3	3
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1298082

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DL1GPH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	510.9
2.5°	509.4
5°	503.8
7.5°	494.8
10°	481.0
12.5°	461.5
15°	436.1
17.5°	403.9
20°	366.1
22.5°	323.8
25°	278.9
27.5°	232.8
30°	189.0
32.5°	149.3
35°	115.3
37.5°	87.6
40°	64.8
42.5°	46.4
45°	33.7
47.5°	24.3
50°	16.5
52.5°	9.4
55°	5.2
57.5°	4.5
60°	4.1
62.5°	3.7
65°	3.4
67.5°	3.0
70°	2.6
72.5°	2.2
75°	1.9
77.5°	1.5
80°	1.1
82.5°	0.7
85°	0.4
87.5°	0.4
90°	0.0

(END OF REPORT)