

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298145

Luminaire Tested: P3A13R55W2N902765DE010 E3DLD1WH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1298145
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R55W2N902765DE010 E3DLD1WH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 5000K CCT AND, 90CRI ,
E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 653.0 lumens
Efficiency: N/A
Efficacy: 53.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1298145

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DLD1WH_5000K

Luminous Intensity Polar Plot

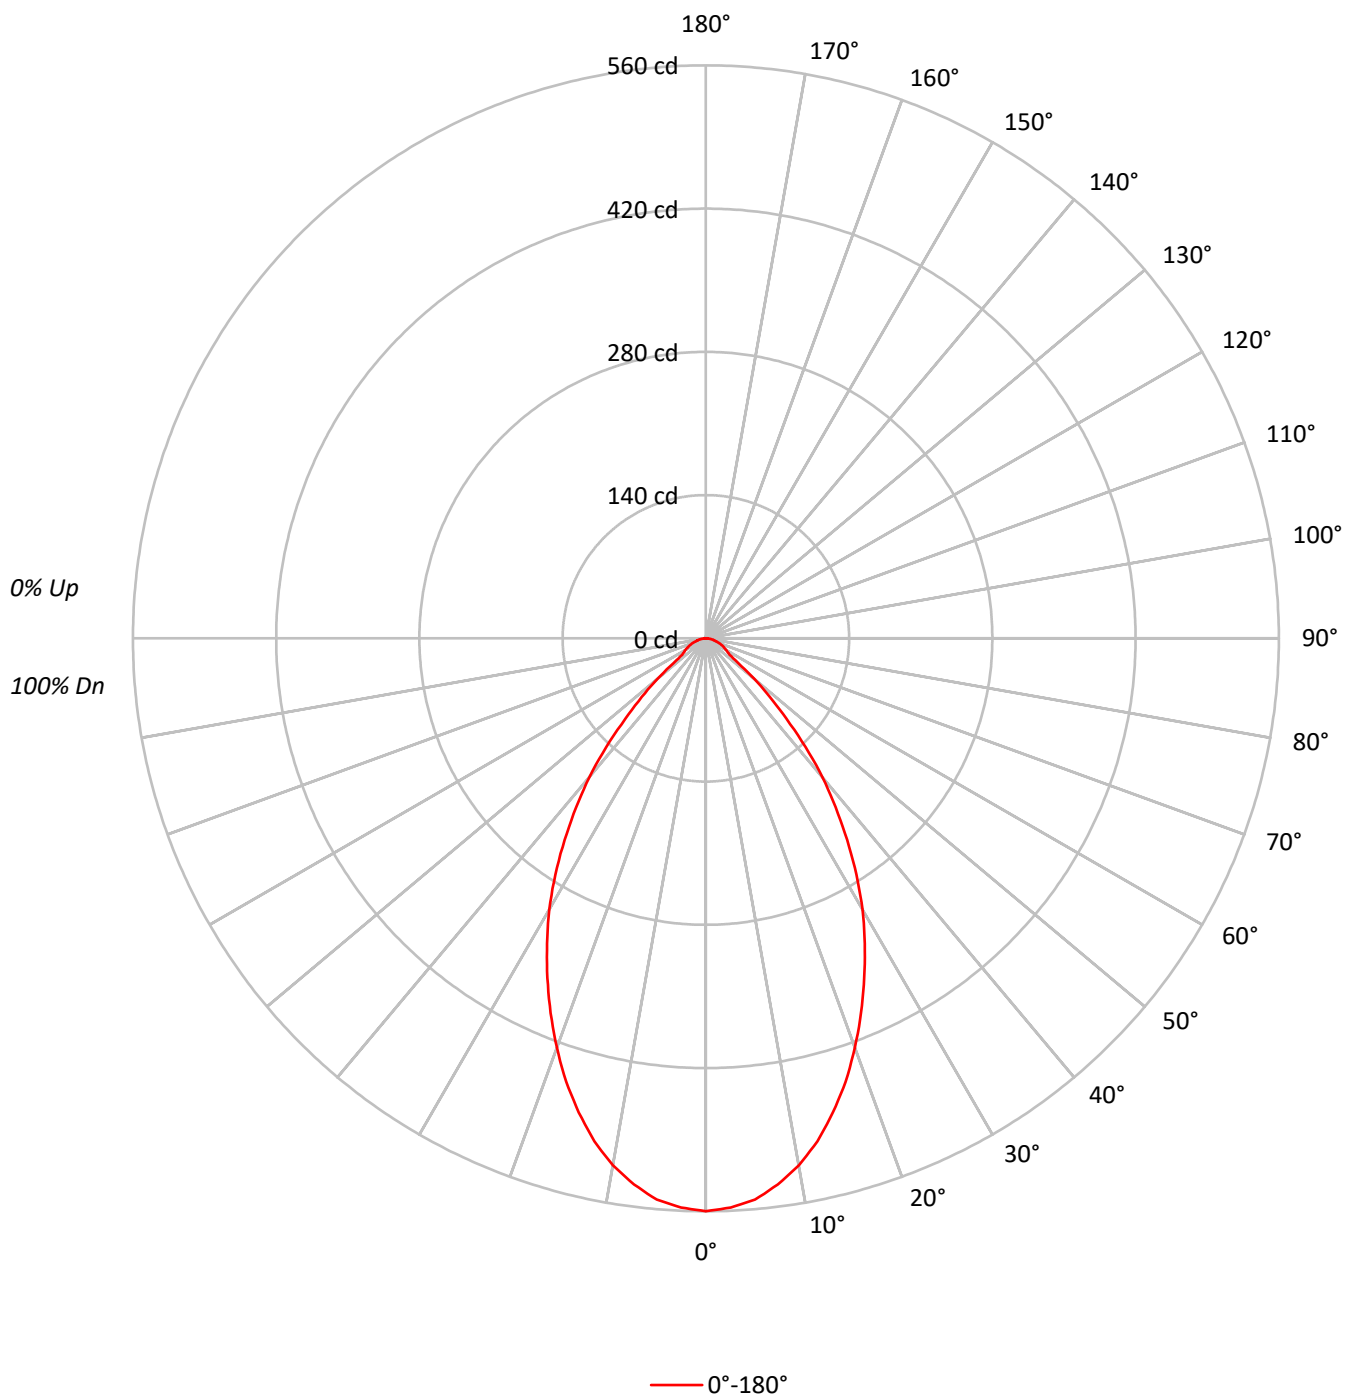

TEST NUMBER: P1298145

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DLD1WH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	112	109	106	103		110	107	104	102		103	100	98		99	97	95		95	94	93
2	105	100	95	91		103	98	93	90		94	91	88		91	88	86		89	86	84
3	99	91	85	81		97	90	84	80		87	82	79		85	81	77		82	79	76
4	93	84	77	72		91	83	77	72		80	75	71		78	74	70		76	73	69
5	87	77	71	66		85	76	70	65		75	69	65		73	68	64		71	67	64
6	82	72	65	60		80	71	64	60		69	64	59		68	63	59		66	62	58
7	77	67	60	55		76	66	59	55		65	59	54		63	58	54		62	57	54
8	73	62	55	51		72	62	55	51		60	55	50		59	54	50		58	53	50
9	69	58	51	47		68	58	51	47		57	51	47		56	50	46		55	50	46
10	65	55	48	44		64	54	48	44		53	47	43		52	47	43		52	47	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	122775
5°	121219
10°	116431
15°	108900
20°	99339
25°	88626
30°	77531
35°	64407
40°	50781
45°	34453
50°	21048
55°	10896
60°	10131
65°	9599
70°	8912
75°	7879
80°	7829
85°	5787

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 34453 cd/sqm

TEST NUMBER: P1298145

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DLD1WH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.6	7.9
10°-20°	134.1	20.5
20°-30°	167.9	25.7
30°-40°	149.9	23.0
40°-50°	87.8	13.4
50°-60°	30.3	4.6
60°-70°	18.3	2.8
70°-80°	10.2	1.6
80°-90°	2.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	353.6	54.2
0°-40°	503.5	77.1
0°-60°	621.6	95.2
0°-90°	653.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	653.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	560	
5°	551	52
15°	480	134
25°	366	168
35°	241	150
45°	111	88
55°	28	30
65°	18	18
75°	9	10
85°	2	3
90°	0	

TEST NUMBER: P1298145

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DLD1WH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	559.9
2.5°	556.8
5°	550.7
7.5°	538.3
10°	522.9
12.5°	503.6
15°	479.7
17.5°	454.3
20°	425.7
22.5°	396.4
25°	366.3
27.5°	336.3
30°	306.2
32.5°	273.8
35°	240.6
37.5°	208.2
40°	177.4
42.5°	144.2
45°	111.1
47.5°	84.8
50°	61.7
52.5°	40.1
55°	28.5
57.5°	25.5
60°	23.1
62.5°	20.8
65°	18.5
67.5°	16.2
70°	13.9
72.5°	11.6
75°	9.3
77.5°	7.7
80°	6.2
82.5°	3.9
85°	2.3
87.5°	1.5
90°	0.0

(END OF REPORT)