

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298147

Luminaire Tested: P3A13R55W2N902765DE010 E3DLD1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1298147
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R55W2N902765DE010 E3DLD1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 2700K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 587.0 lumens
Efficiency: N/A
Efficacy: 47.7 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1298147

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DLD1WMH_2700K

Luminous Intensity Polar Plot

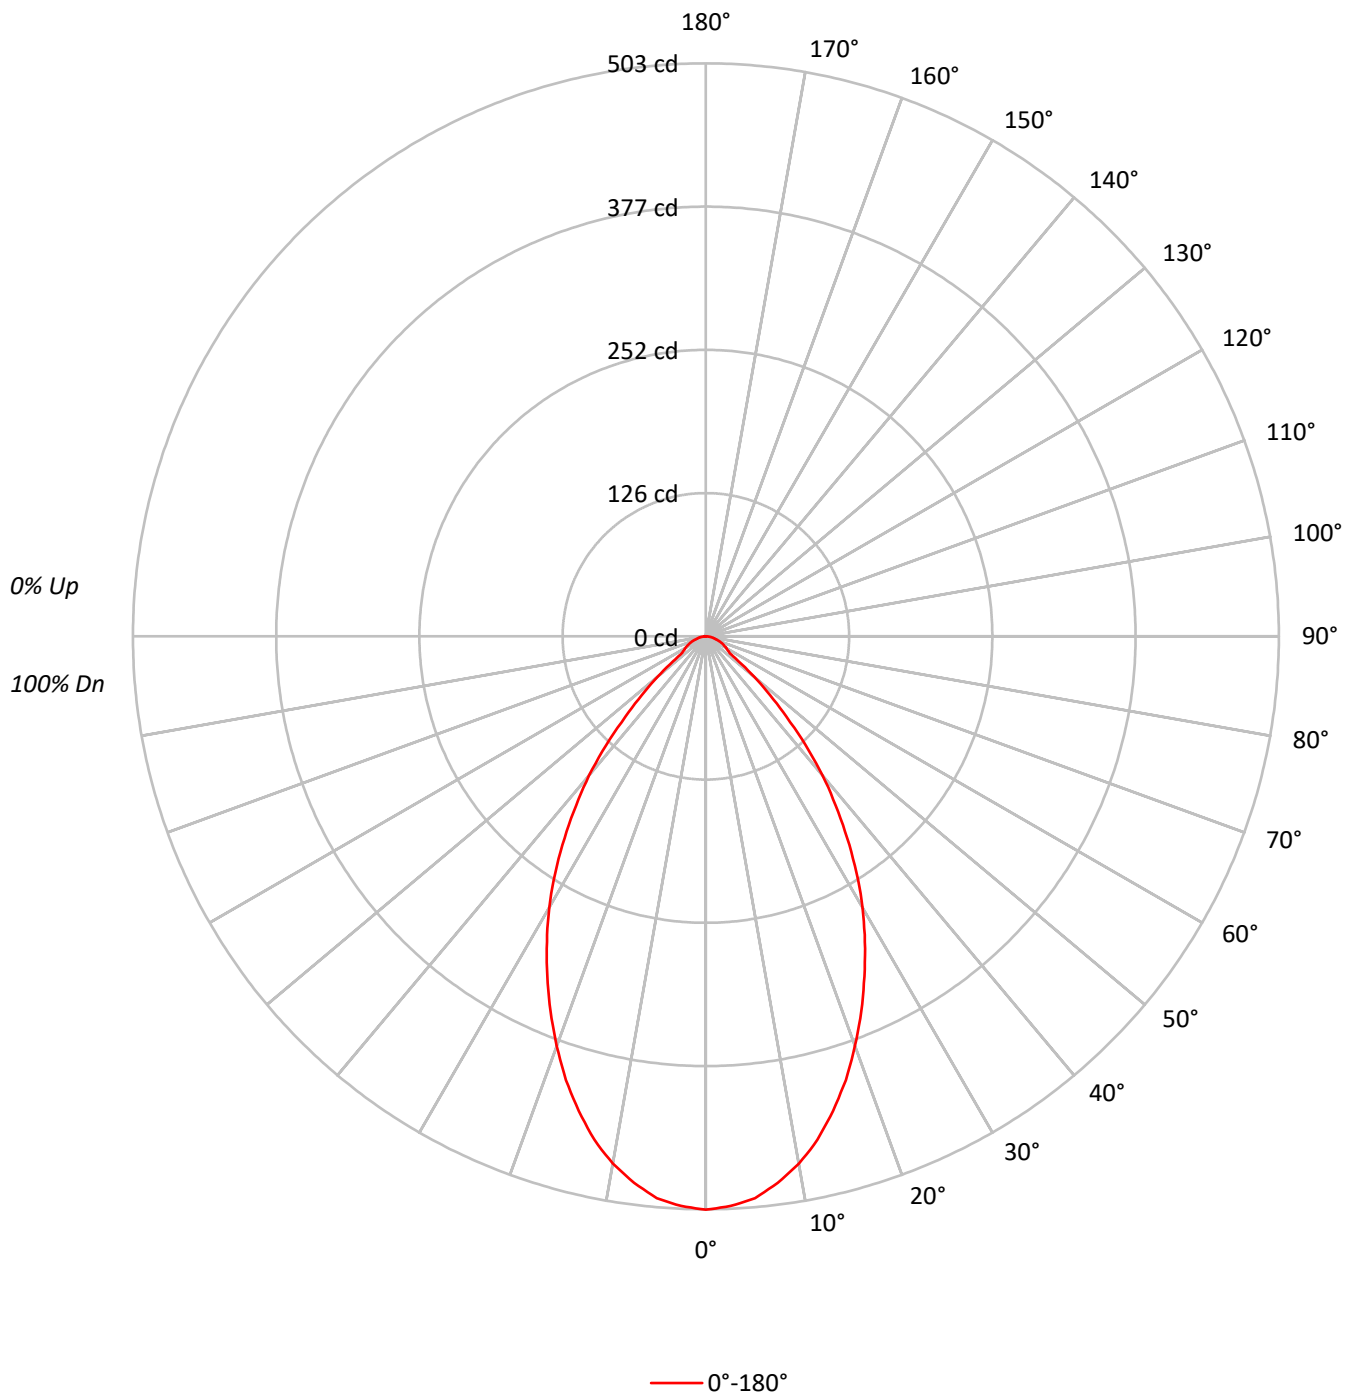



TEST NUMBER: P1298147

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DLD1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	112	109	106	103		110	107	104	102		103	100	98		99	97	95		95	94	93		91			
2	105	100	95	91		103	98	93	90		94	91	88		91	88	86		89	86	84		82			
3	99	91	85	81		97	90	84	80		87	82	79		85	81	77		82	79	76		74			
4	93	84	77	72		91	83	77	72		80	75	71		78	74	70		76	73	69		68			
5	87	77	71	66		85	76	70	65		75	69	65		73	68	64		71	67	64		62			
6	82	72	65	60		80	71	64	60		69	64	59		68	63	59		66	62	58		57			
7	77	67	60	55		76	66	59	55		65	59	54		63	58	54		62	57	54		52			
8	73	62	55	51		72	62	55	51		60	55	50		59	54	50		58	53	50		48			
9	69	58	51	47		68	58	51	47		57	51	47		56	50	46		55	50	46		45			
10	65	55	48	44		64	54	48	44		53	47	43		52	47	43		52	47	43		42			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	110364
5°	108959
10°	104674
15°	97889
20°	89304
25°	79674
30°	69682
35°	57902
40°	45657
45°	30949
50°	18933
55°	9825
60°	9122
65°	8613
70°	8014
75°	7032
80°	6945
85°	5284

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 30949 cd/sqm

TEST NUMBER: P1298147

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DLD1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.4	7.9
10°-20°	120.5	20.5
20°-30°	150.9	25.7
30°-40°	134.7	23.0
40°-50°	78.9	13.4
50°-60°	27.3	4.6
60°-70°	16.5	2.8
70°-80°	9.1	1.6
80°-90°	2.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	317.9	54.2
0°-40°	452.6	77.1
0°-60°	558.8	95.2
0°-90°	587.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	587.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	503	
5°	495	46
15°	431	121
25°	329	151
35°	216	135
45°	100	79
55°	26	27
65°	17	16
75°	8	9
85°	2	3
90°	0	

TEST NUMBER: P1298147

CATALOG NUMBER: P3A13R55W2N902765DE010 E3DLD1WMH_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	503.3
2.5°	500.6
5°	495.0
7.5°	483.9
10°	470.1
12.5°	452.7
15°	431.2
17.5°	408.4
20°	382.7
22.5°	356.4
25°	329.3
27.5°	302.3
30°	275.2
32.5°	246.1
35°	216.3
37.5°	187.2
40°	159.5
42.5°	129.6
45°	99.8
47.5°	76.3
50°	55.5
52.5°	36.1
55°	25.7
57.5°	22.9
60°	20.8
62.5°	18.7
65°	16.6
67.5°	14.6
70°	12.5
72.5°	10.4
75°	8.3
77.5°	6.9
80°	5.5
82.5°	3.5
85°	2.1
87.5°	1.4
90°	0.0

(END OF REPORT)