

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298376

Luminaire Tested: P3A13R60W2N902765DE010 E3D1LI_2700K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1298376
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R60W2N902765DE010 E3D1LI_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 2700K CCT AND, 90CRI ,
E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 830.0 lumens
Efficiency: N/A
Efficacy: 67.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1298376

CATALOG NUMBER: P3A13R60W2N902765DE010 E3D1LI_2700K

Luminous Intensity Polar Plot

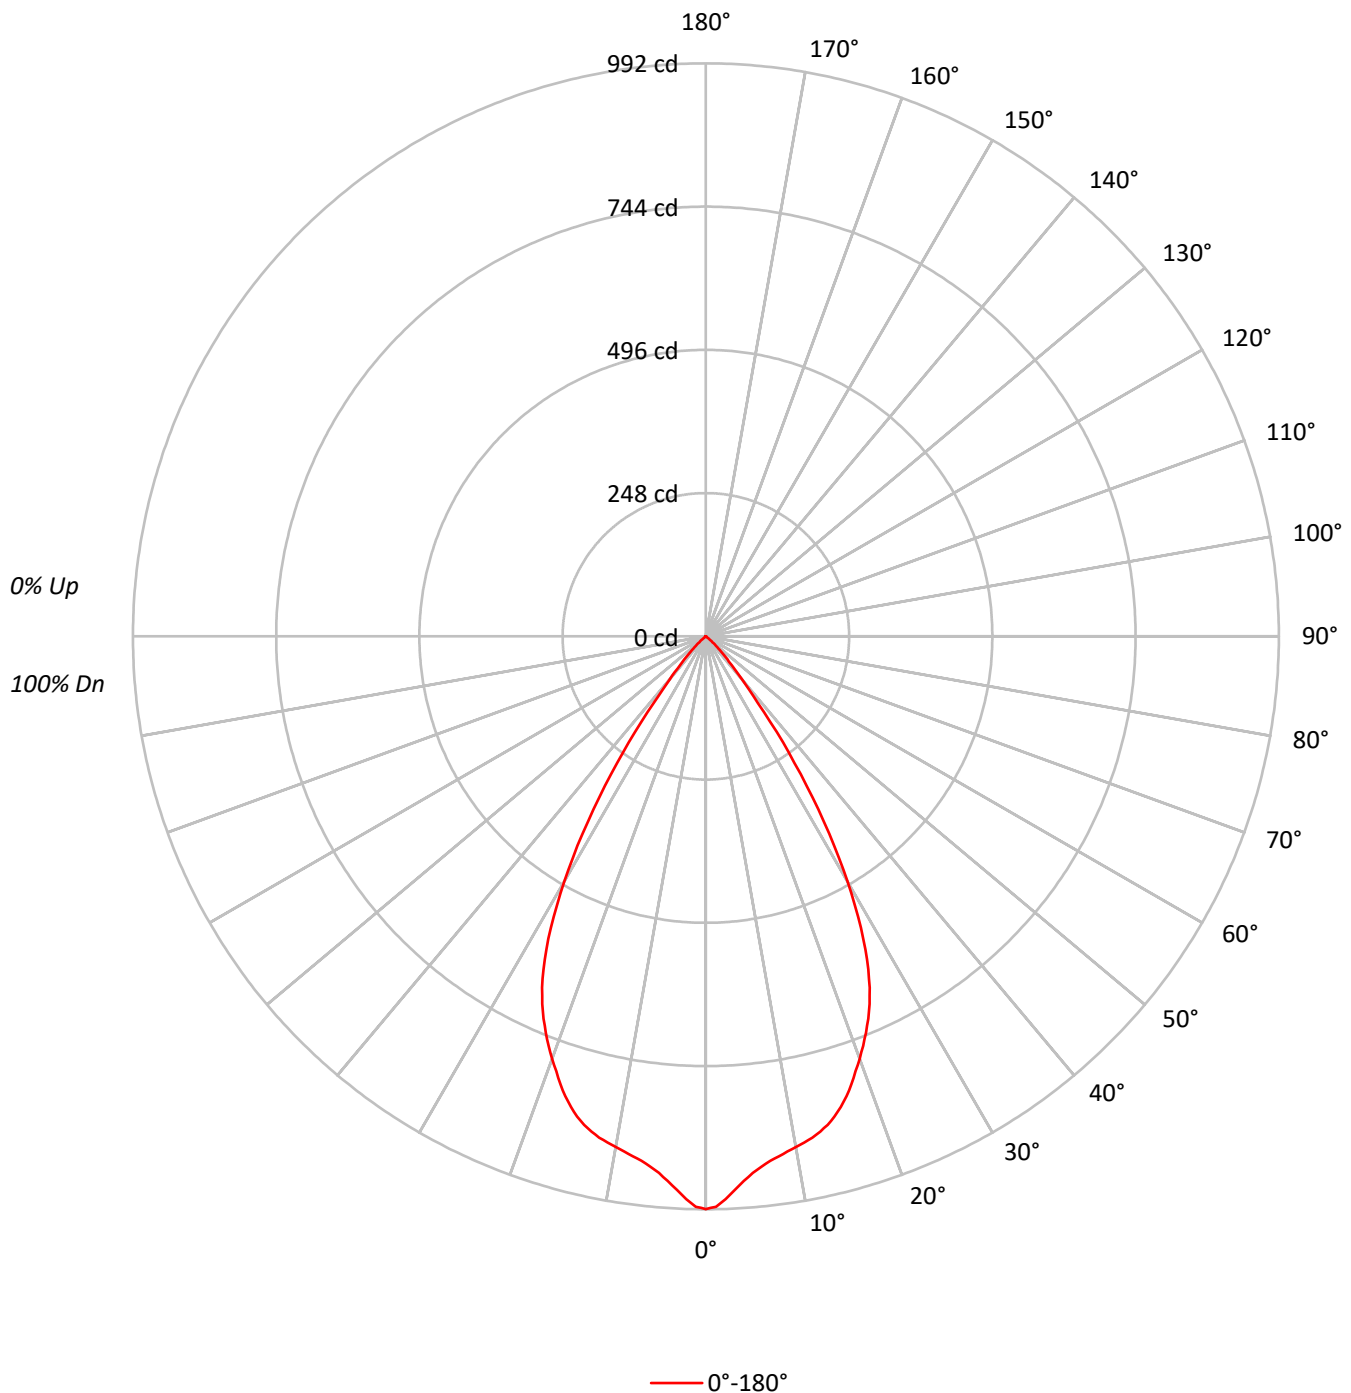



TEST NUMBER: P1298376

CATALOG NUMBER: P3A13R60W2N902765DE010 E3D1LI_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	106		111	109	107	105		105	103	102		101	100	99		98	97	96
2	108	104	100	96		106	102	98	95		99	96	93		96	93	91		93	91	89
3	103	97	92	88		101	96	91	88		93	89	86		91	87	85		88	86	84
4	98	91	85	81		96	90	85	81		88	83	80		86	82	79		84	81	78
5	93	85	80	75		92	84	79	75		83	78	74		81	77	74		79	76	73
6	89	80	74	70		87	79	74	70		78	73	70		77	72	69		75	72	69
7	85	76	70	66		83	75	69	65		74	69	65		72	68	65		71	67	64
8	81	71	65	61		79	71	65	61		70	65	61		69	64	61		68	64	61
9	77	67	62	58		76	67	61	58		66	61	57		65	61	57		64	60	57
10	73	64	58	54		72	63	58	54		63	58	54		62	57	54		61	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	217461
5°	205304
10°	199952
15°	195393
20°	181666
25°	162396
30°	124044
35°	71608
40°	27795
45°	11567
50°	2559
55°	382
60°	307
65°	156
70°	192
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 11567 cd/sqm

TEST NUMBER: P1298376

CATALOG NUMBER: P3A13R60W2N902765DE010 E3D1LI_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.0	10.6
10°-20°	239.8	28.9
20°-30°	300.3	36.2
30°-40°	167.9	20.2
40°-50°	31.9	3.8
50°-60°	1.6	0.2
60°-70°	0.3	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	628.1	75.7
0°-40°	796.0	95.9
0°-60°	829.5	99.9
0°-90°	830.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	830.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	992	
5°	933	88
15°	861	240
25°	671	300
35°	268	168
45°	37	32
55°	1	2
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1298376

CATALOG NUMBER: P3A13R60W2N902765DE010 E3D1LI_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	991.7
1°	987.7
2°	974.8
3°	959.5
4°	945.2
5°	932.7
6°	923.2
7°	915.0
8°	908.9
9°	903.1
10°	898.0
11°	892.9
12°	887.2
13°	880.0
14°	871.6
15°	860.7
16°	847.5
17°	832.5
18°	815.5
19°	796.2
20°	778.5
21°	759.5
22°	739.8
23°	719.1
24°	696.4
25°	671.2
26°	641.7
27°	608.8
28°	571.8
29°	532.4
30°	489.9
31°	447.2
32°	403.0
32.5°	378.9
33°	357.2
34°	312.0
35°	267.5
36°	227.5
37°	185.0
37.5°	165.7
38°	146.7
39°	118.2
40°	97.1
42.5°	59.1
45°	37.3



TEST NUMBER: P1298376

CATALOG NUMBER: P3A13R60W2N902765DE010 E3D1LI_2700K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	20.7
50°	7.5
52.5°	1.7
55°	1.0
57.5°	0.7
60°	0.7
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)