

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298436

Luminaire Tested: P3A13R60W2N902765DE010 E3DLD1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1298436
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A13R60W2N902765DE010 E3DLD1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 2700K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 280.0 lumens
Efficiency: N/A
Efficacy: 22.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1298436

CATALOG NUMBER: P3A13R60W2N902765DE010 E3DLD1GPH_2700K

Luminous Intensity Polar Plot

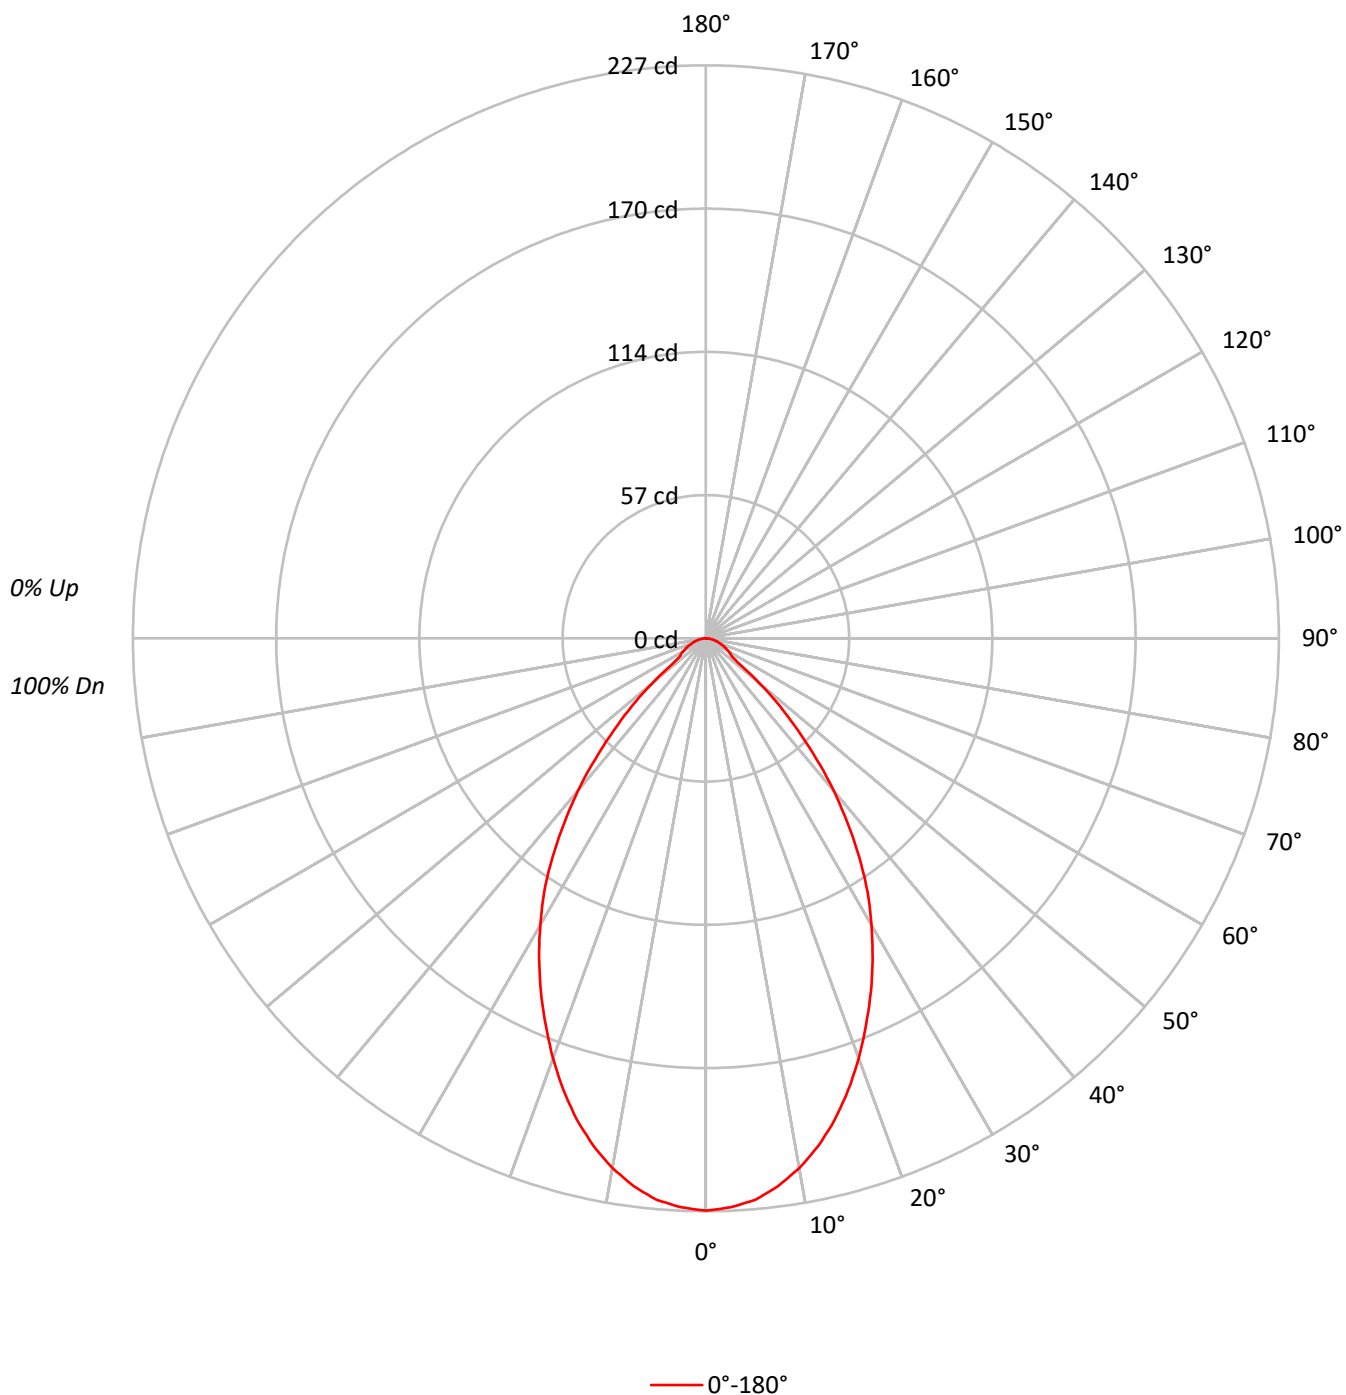

TEST NUMBER: P1298436

CATALOG NUMBER: P3A13R60W2N902765DE010 E3DLD1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76	72	69	67
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71	66	63	61
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61	57	53	51
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58	53	49	47
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54	49	45	44
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51	46	42	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	49711
5°	49152
10°	47450
15°	44813
20°	41327
25°	37405
30°	33220
35°	28375
40°	22557
45°	15909
50°	9518
55°	4817
60°	4605
65°	4255
70°	3911
75°	3728
80°	3410
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 15909 cd/sqm

TEST NUMBER: P1298436

CATALOG NUMBER: P3A13R60W2N902765DE010 E3DLD1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	21.0	7.5
10°-20°	55.2	19.7
20°-30°	70.9	25.3
30°-40°	65.7	23.5
40°-50°	40.0	14.3
50°-60°	13.4	4.8
60°-70°	8.1	2.9
70°-80°	4.6	1.6
80°-90°	1.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	147.0	52.5
0°-40°	212.7	76.0
0°-60°	266.1	95.0
0°-90°	280.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	280.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	227	
5°	223	21
15°	197	55
25°	155	71
35°	106	66
45°	51	40
55°	13	13
65°	8	8
75°	4	5
85°	1	1
90°	0	

TEST NUMBER: P1298436

CATALOG NUMBER: P3A13R60W2N902765DE010 E3DLD1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	226.7
2.5°	225.6
5°	223.3
7.5°	218.9
10°	213.1
12.5°	205.9
15°	197.4
17.5°	187.6
20°	177.1
22.5°	165.8
25°	154.6
27.5°	143.1
30°	131.2
32.5°	119.3
35°	106.0
37.5°	92.1
40°	78.8
42.5°	64.9
45°	51.3
47.5°	39.8
50°	27.9
52.5°	16.7
55°	12.6
57.5°	11.6
60°	10.5
62.5°	9.2
65°	8.2
67.5°	7.1
70°	6.1
72.5°	5.1
75°	4.4
77.5°	3.4
80°	2.7
82.5°	1.7
85°	1.0
87.5°	0.7
90°	0.0

(END OF REPORT)