

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298879

Luminaire Tested: P3A13R70W2N902750DE010 E3D1WMH\_3500K

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1298879  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A13R70W2N902750DE010 E3D1WMH\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 3500K CCT AND, 90CRI ,  
E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 925.0 lumens  
Efficiency: N/A  
Efficacy: 75.2 lumens/watt  
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.06  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1298879

CATALOG NUMBER: P3A13R70W2N902750DE010 E3D1WMH\_3500K

### Luminous Intensity Polar Plot

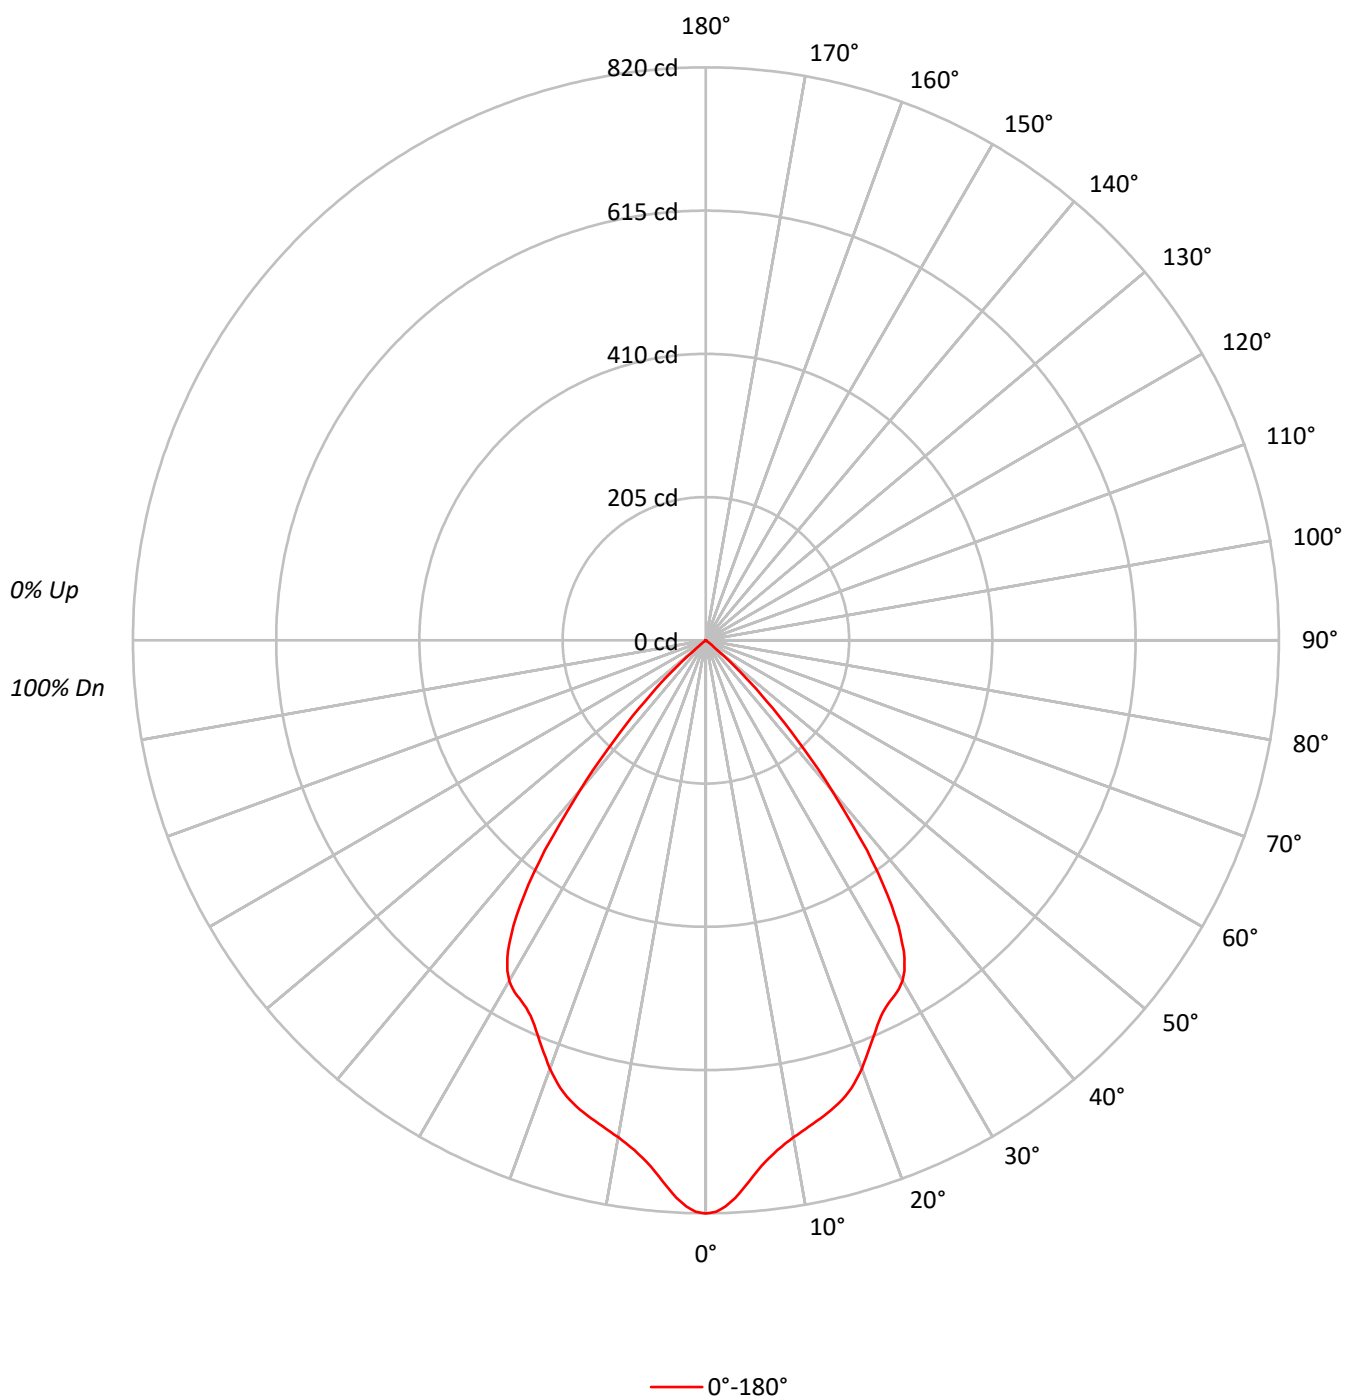

TEST NUMBER: P1298879

CATALOG NUMBER: P3A13R70W2N902750DE010 E3D1WMH\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 | 100 |
| 1   | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 100 |  | 100 | 99  | 97  |  | 97  | 96  | 95  | 93  |
| 2   | 107 | 102 | 98  | 94  | 105 | 100 | 96  | 93  | 97  | 94  | 91  |  | 94  | 91  | 89  |  | 91  | 89  | 87  | 85  |
| 3   | 101 | 94  | 89  | 85  | 99  | 93  | 88  | 84  | 90  | 86  | 83  |  | 88  | 84  | 81  |  | 86  | 83  | 80  | 79  |
| 4   | 95  | 87  | 81  | 77  | 94  | 86  | 81  | 77  | 84  | 79  | 76  |  | 82  | 78  | 75  |  | 80  | 77  | 74  | 72  |
| 5   | 90  | 81  | 75  | 70  | 88  | 80  | 74  | 70  | 78  | 73  | 69  |  | 77  | 72  | 69  |  | 75  | 71  | 68  | 66  |
| 6   | 85  | 75  | 69  | 64  | 83  | 75  | 69  | 64  | 73  | 68  | 64  |  | 72  | 67  | 63  |  | 70  | 66  | 63  | 61  |
| 7   | 80  | 70  | 64  | 59  | 79  | 70  | 63  | 59  | 68  | 63  | 59  |  | 67  | 62  | 58  |  | 66  | 61  | 58  | 57  |
| 8   | 76  | 66  | 59  | 55  | 75  | 65  | 59  | 55  | 64  | 58  | 54  |  | 63  | 58  | 54  |  | 62  | 57  | 54  | 52  |
| 9   | 72  | 61  | 55  | 51  | 71  | 61  | 55  | 51  | 60  | 54  | 50  |  | 59  | 54  | 50  |  | 58  | 53  | 50  | 49  |
| 10  | 68  | 58  | 51  | 47  | 67  | 57  | 51  | 47  | 56  | 51  | 47  |  | 55  | 50  | 47  |  | 55  | 50  | 47  | 45  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 179854 |
| 5°  | 169601 |
| 10° | 160808 |
| 15° | 157912 |
| 20° | 152217 |
| 25° | 143476 |
| 30° | 142452 |
| 35° | 124075 |
| 40° | 80265  |
| 45° | 37926  |
| 50° | 5322   |
| 55° | 421    |
| 60° | 351    |
| 65° | 415    |
| 70° | 256    |
| 75° | 339    |
| 80° | 505    |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 37926 cd/sqm

TEST NUMBER: P1298879

CATALOG NUMBER: P3A13R70W2N902750DE010 E3D1WMH\_3500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 71.9   | 7.8       |
| 10°-20°   | 195.3  | 21.1      |
| 20°-30°   | 276.4  | 29.9      |
| 30°-40°   | 277.7  | 30.0      |
| 40°-50°   | 99.9   | 10.8      |
| 50°-60°   | 2.7    | 0.3       |
| 60°-70°   | 0.6    | 0.1       |
| 70°-80°   | 0.4    | 0.0       |
| 80°-90°   | 0.1    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 543.6  | 58.8      |
| 0°-40°    | 821.4  | 88.8      |
| 0°-60°    | 923.9  | 99.9      |
| 0°-90°    | 925.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 925.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 820 |      |
| 5°  | 770 | 72   |
| 15° | 696 | 195  |
| 25° | 593 | 276  |
| 35° | 464 | 278  |
| 45° | 122 | 100  |
| 55° | 1   | 3    |
| 65° | 1   | 1    |
| 75° | 0   | 0    |
| 85° | 0   | 0    |
| 90° | 0   |      |

TEST NUMBER: P1298879

CATALOG NUMBER: P3A13R70W2N902750DE010 E3D1WMH\_3500K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 820.2 |
| 1°    | 817.9 |
| 2°    | 810.7 |
| 3°    | 799.3 |
| 4°    | 784.9 |
| 5°    | 770.5 |
| 6°    | 756.8 |
| 7°    | 746.1 |
| 8°    | 736.6 |
| 9°    | 729.0 |
| 10°   | 722.2 |
| 11°   | 716.5 |
| 12°   | 711.2 |
| 13°   | 705.9 |
| 14°   | 700.9 |
| 15°   | 695.6 |
| 16°   | 689.2 |
| 17°   | 682.3 |
| 18°   | 674.0 |
| 19°   | 663.7 |
| 20°   | 652.3 |
| 21°   | 639.8 |
| 22°   | 627.2 |
| 23°   | 615.1 |
| 24°   | 603.3 |
| 25°   | 593.0 |
| 26°   | 585.8 |
| 27°   | 580.1 |
| 28°   | 575.6 |
| 29°   | 570.2 |
| 30°   | 562.6 |
| 31°   | 551.6 |
| 32°   | 536.1 |
| 32.5° | 527.3 |
| 33°   | 515.5 |
| 34°   | 492.4 |
| 35°   | 463.5 |
| 36°   | 431.6 |
| 37°   | 395.5 |
| 37.5° | 378.8 |
| 38°   | 356.0 |
| 39°   | 315.3 |
| 40°   | 280.4 |
| 42.5° | 194.1 |
| 45°   | 122.3 |



TEST NUMBER: P1298879

CATALOG NUMBER: P3A13R70W2N902750DE010 E3D1WMH\_3500K

**CANDELA DISTRIBUTION (continued):**

|       | 0°   |
|-------|------|
| 47.5° | 65.7 |
| 50°   | 15.6 |
| 52.5° | 1.9  |
| 55°   | 1.1  |
| 57.5° | 1.1  |
| 60°   | 0.8  |
| 62.5° | 0.8  |
| 65°   | 0.8  |
| 67.5° | 0.4  |
| 70°   | 0.4  |
| 72.5° | 0.4  |
| 75°   | 0.4  |
| 77.5° | 0.4  |
| 80°   | 0.4  |
| 82.5° | 0.0  |
| 85°   | 0.0  |
| 87.5° | 0.0  |
| 90°   | 0.0  |

(END OF REPORT)