

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301949

Luminaire Tested: P3A17R55W2N902765DE010 E3DLP1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301949
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R55W2N902765DE010 E3DLP1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 3000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 426.0 lumens
Efficiency: N/A
Efficacy: 22.0 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301949

CATALOG NUMBER: P3A17R55W2N902765DE010 E3DLP1GPH_3000K

Luminous Intensity Polar Plot

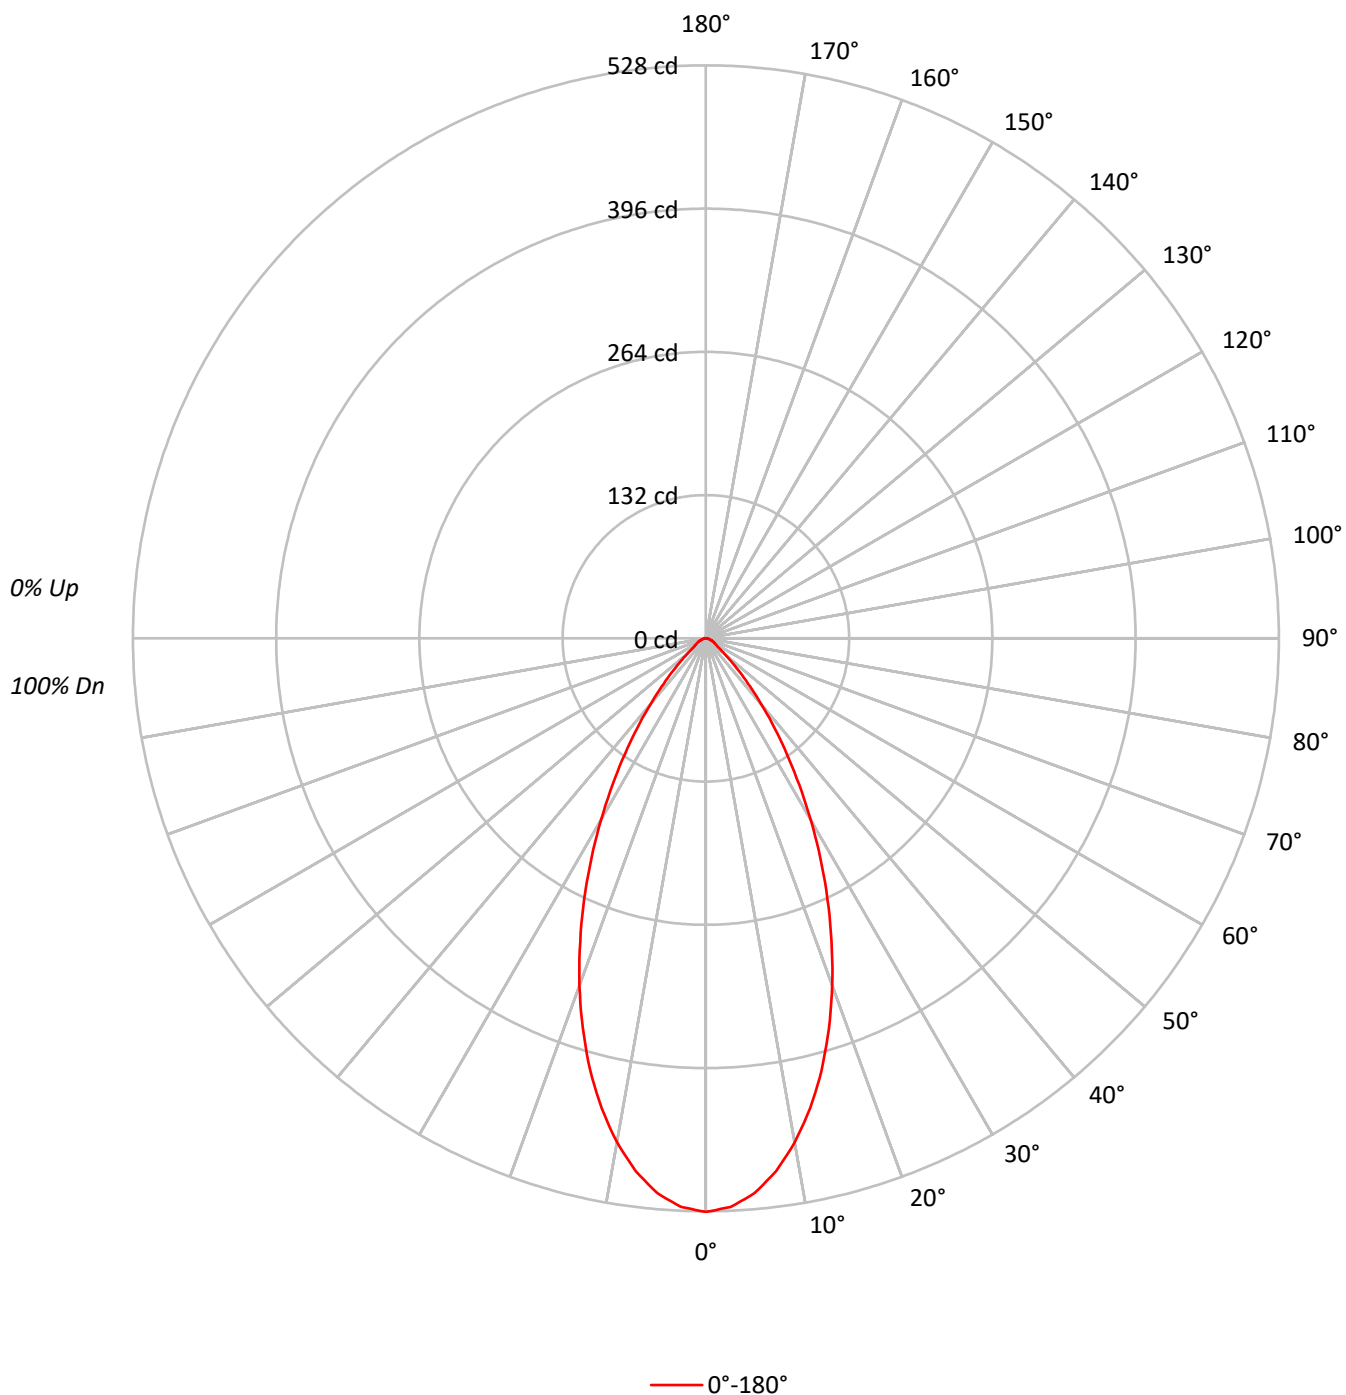

TEST NUMBER: P1301949

CATALOG NUMBER: P3A17R55W2N902765DE010 E3DLP1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92		
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85		
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	79		
4	96	88	82	77	94	87	81	77	84	80	76	82	78	75	80	77	74	73		
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67		
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63		
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59		
8	78	68	62	57	76	67	61	57	66	61	57	65	60	57	64	60	56	55		
9	74	64	58	54	73	63	58	54	62	57	53	62	57	53	61	56	53	52		
10	70	60	55	51	69	60	54	50	59	54	50	58	54	50	58	53	50	49		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	115890
5°	112987
10°	105030
15°	93531
20°	79480
25°	64141
30°	48894
35°	34773
40°	22957
45°	13614
50°	7983
55°	4932
60°	4342
65°	3943
70°	3398
75°	2965
80°	2904
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 13614 cd/sqm

TEST NUMBER: P1301949

CATALOG NUMBER: P3A17R55W2N902765DE010 E3DLP1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.7	11.2
10°-20°	114.2	26.8
20°-30°	121.0	28.4
30°-40°	81.7	19.2
40°-50°	35.8	8.4
50°-60°	12.8	3.0
60°-70°	7.5	1.8
70°-80°	3.9	0.9
80°-90°	1.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	282.9	66.4
0°-40°	364.6	85.6
0°-60°	413.3	97.0
0°-90°	426.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	426.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	528	
5°	513	48
15°	412	114
25°	265	121
35°	130	82
45°	44	36
55°	13	13
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1301949

CATALOG NUMBER: P3A17R55W2N902765DE010 E3DLP1GPH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	528.5
2.5°	524.4
5°	513.3
7.5°	495.1
10°	471.7
12.5°	443.6
15°	412.0
17.5°	376.9
20°	340.6
22.5°	302.6
25°	265.1
27.5°	228.2
30°	193.1
32.5°	159.8
35°	129.9
37.5°	103.0
40°	80.2
42.5°	60.3
45°	43.9
47.5°	32.2
50°	23.4
52.5°	16.4
55°	12.9
57.5°	11.7
60°	9.9
62.5°	8.8
65°	7.6
67.5°	6.4
70°	5.3
72.5°	4.7
75°	3.5
77.5°	2.9
80°	2.3
82.5°	1.8
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)