

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299138

Luminaire Tested: P3A17R15W2N902750DE010 E3D1LI_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299138
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R15W2N902750DE010 E3D1LI_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 3000K CCT AND, 90CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1544.0 lumens
Efficiency: N/A
Efficacy: 79.6 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299138

CATALOG NUMBER: P3A17R15W2N902750DE010 E3D1LI_3000K

Luminous Intensity Polar Plot

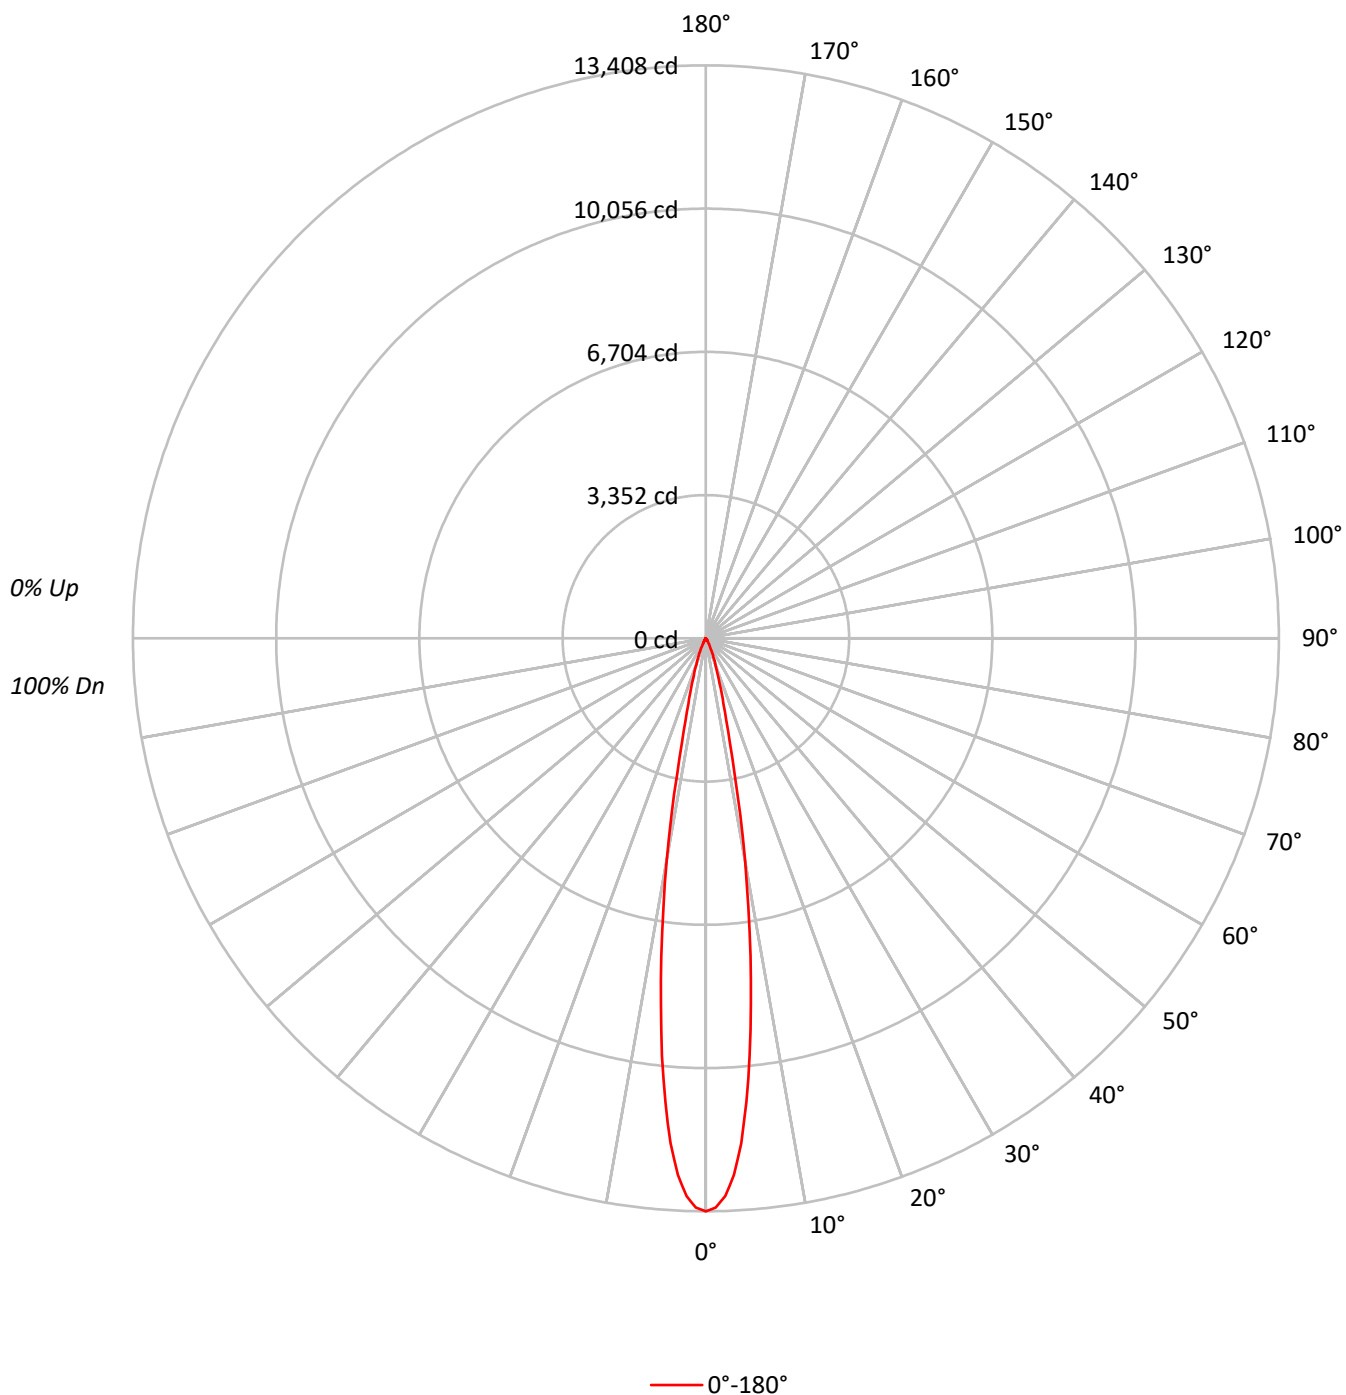



TEST NUMBER: P1299138

CATALOG NUMBER: P3A17R15W2N902750DE010 E3D1LI_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	116	114	112	111		113	112	110	109		108	107	105		104	103	102		101	100	99		98			
2	112	109	107	105		110	108	105	103		105	103	101		102	100	99		99	98	97		96			
3	110	106	102	100		108	104	102	99		102	100	98		100	98	96		98	96	95		94			
4	107	102	99	96		105	101	98	96		99	97	95		98	96	94		96	94	93		92			
5	105	100	96	94		103	99	96	93		97	94	92		96	93	92		94	93	91		90			
6	102	97	94	91		101	96	93	91		95	92	90		94	92	90		93	91	89		88			
7	100	95	91	89		99	94	91	89		93	90	88		92	90	88		91	89	88		87			
8	98	93	89	87		97	92	89	87		91	89	87		91	88	86		90	88	86		85			
9	96	91	88	85		96	91	87	85		90	87	85		89	87	85		88	86	85		84			
10	95	89	86	84		94	89	86	84		88	85	83		88	85	83		87	85	83		82			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2940181
5°	2397528
10°	1174171
15°	359389
20°	152193
25°	68835
30°	26840
35°	12394
40°	3864
45°	1458
50°	614
55°	229
60°	263
65°	311
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1458 cd/sqm

TEST NUMBER: P1299138

CATALOG NUMBER: P3A17R15W2N902750DE010 E3D1LI_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	847.8	54.9
10°-20°	520.2	33.7
20°-30°	139.7	9.0
30°-40°	30.8	2.0
40°-50°	4.3	0.3
50°-60°	0.8	0.1
60°-70°	0.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1507.8	97.7
0°-40°	1538.6	99.6
0°-60°	1543.7	100.0
0°-90°	1544.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1544.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13408	
5°	10892	848
15°	1583	520
25°	284	140
35°	46	31
45°	5	4
55°	1	1
65°	1	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1299138

CATALOG NUMBER: P3A17R15W2N902750DE010 E3D1LI_3000K

CANDELA DISTRIBUTION (FULL):


0°	
0°	13408.3
1°	13324.5
2°	13055.8
3°	12571.6
4°	11842.7
5°	10892.0
6°	9816.5
7°	8618.6
8°	7517.9
9°	6351.1
10°	5273.3
11°	4206.6
12°	3236.4
13°	2489.4
14°	1970.7
15°	1583.1
17.5°	981.2
20°	652.2
22.5°	439.1
25°	284.5
27.5°	168.6
30°	106.0
32.5°	71.4
35°	46.3
37.5°	25.8
40°	13.5
42.5°	7.6
45°	4.7
47.5°	2.9
50°	1.8
52.5°	1.2
55°	0.6
57.5°	0.6
60°	0.6
62.5°	0.6
65°	0.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1299138

CATALOG NUMBER: P3A17R15W2N902750DE010 E3D1LI_3000K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)