

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299157

Luminaire Tested: P3A17R15W2N902750DE010 E3DL1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299157
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R15W2N902750DE010 E3DL1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 2700K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 551.0 lumens
Efficiency: N/A
Efficacy: 28.4 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299157

CATALOG NUMBER: P3A17R15W2N902750DE010 E3DL1GPH_2700K

Luminous Intensity Polar Plot

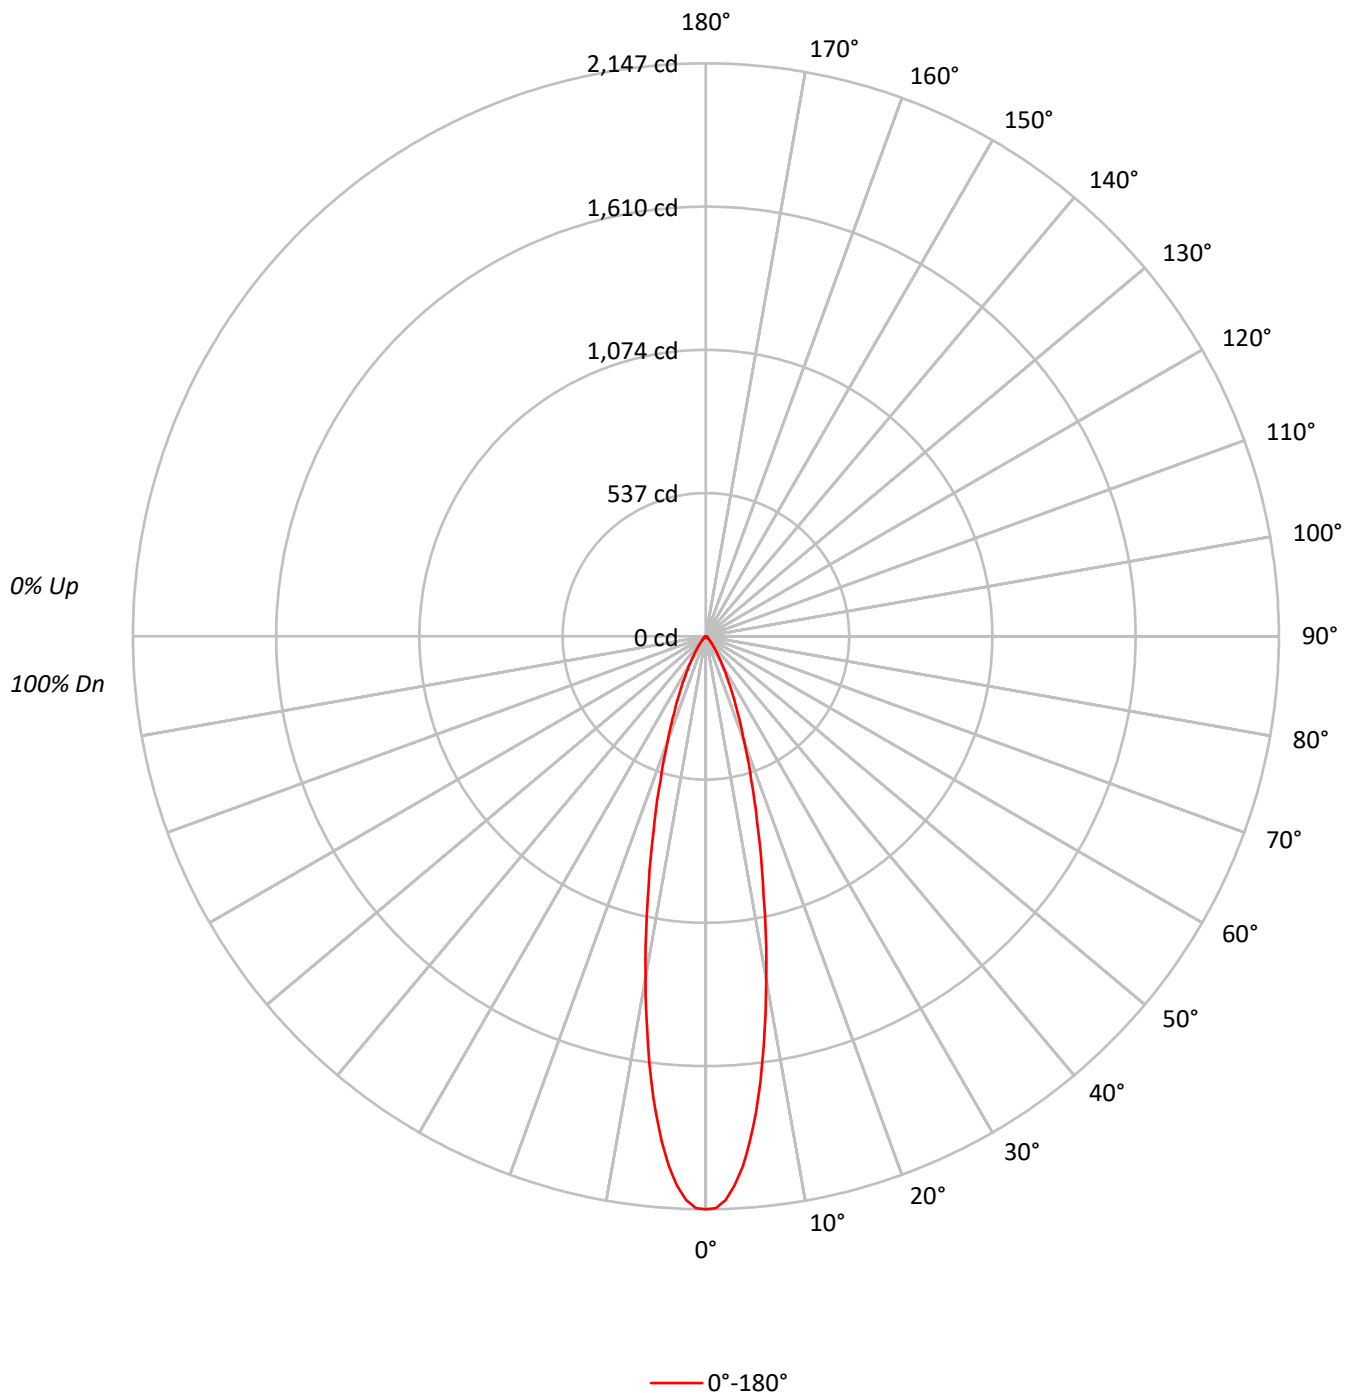

TEST NUMBER: P1299157

CATALOG NUMBER: P3A17R15W2N902750DE010 E3DL1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91		
3	106	101	97	93	104	99	96	93	97	94	91	94	92	90	92	90	88	87		
4	102	96	92	88	100	95	91	88	93	89	87	91	88	86	89	87	85	83		
5	98	92	87	84	97	91	87	83	89	85	83	88	84	82	86	83	81	80		
6	95	88	83	80	94	87	83	80	86	82	79	85	81	79	83	80	78	77		
7	92	85	80	77	91	84	80	76	83	79	76	82	78	76	81	78	75	74		
8	89	81	77	74	88	81	77	73	80	76	73	79	75	73	78	75	73	72		
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	73	70	69		
10	84	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	470708
5°	417807
10°	290153
15°	171601
20°	97728
25°	55866
30°	30916
35°	16490
40°	9103
45°	4931
50°	3070
55°	2447
60°	2105
65°	1920
70°	1731
75°	1779
80°	1389
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4931 cd/sqm

TEST NUMBER: P1299157

CATALOG NUMBER: P3A17R15W2N902750DE010 E3DL1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.4	29.3
10°-20°	213.0	38.7
20°-30°	109.7	19.9
30°-40°	41.2	7.5
40°-50°	13.5	2.4
50°-60°	5.8	1.1
60°-70°	3.7	0.7
70°-80°	2.2	0.4
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	484.1	87.9
0°-40°	525.3	95.3
0°-60°	544.6	98.8
0°-90°	551.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	551.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2147	
5°	1898	161
15°	756	213
25°	231	110
35°	62	41
45°	16	13
55°	6	6
65°	4	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1299157

CATALOG NUMBER: P3A17R15W2N902750DE010 E3DL1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2146.6
1°	2142.3
2°	2114.2
3°	2060.6
4°	1990.0
5°	1898.1
6°	1794.1
7°	1680.0
8°	1553.1
9°	1427.9
10°	1303.1
12.5°	1002.7
15°	755.9
17.5°	565.8
20°	418.8
22.5°	312.6
25°	230.9
27.5°	168.3
30°	122.1
32.5°	86.5
35°	61.6
37.5°	44.1
40°	31.8
42.5°	22.8
45°	15.9
47.5°	11.7
50°	9.0
52.5°	7.4
55°	6.4
57.5°	5.3
60°	4.8
62.5°	4.2
65°	3.7
67.5°	3.2
70°	2.7
72.5°	2.7
75°	2.1
77.5°	1.6
80°	1.1
82.5°	1.1
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)