

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299304

Luminaire Tested: P3A17R15W2N902765DE010 E3D1LI_2700K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299304
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R15W2N902765DE010 E3D1LI_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 2700K CCT AND, 90CRI ,
E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1400.0 lumens
Efficiency: N/A
Efficacy: 72.2 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299304

CATALOG NUMBER: P3A17R15W2N902765DE010 E3D1LI_2700K

Luminous Intensity Polar Plot

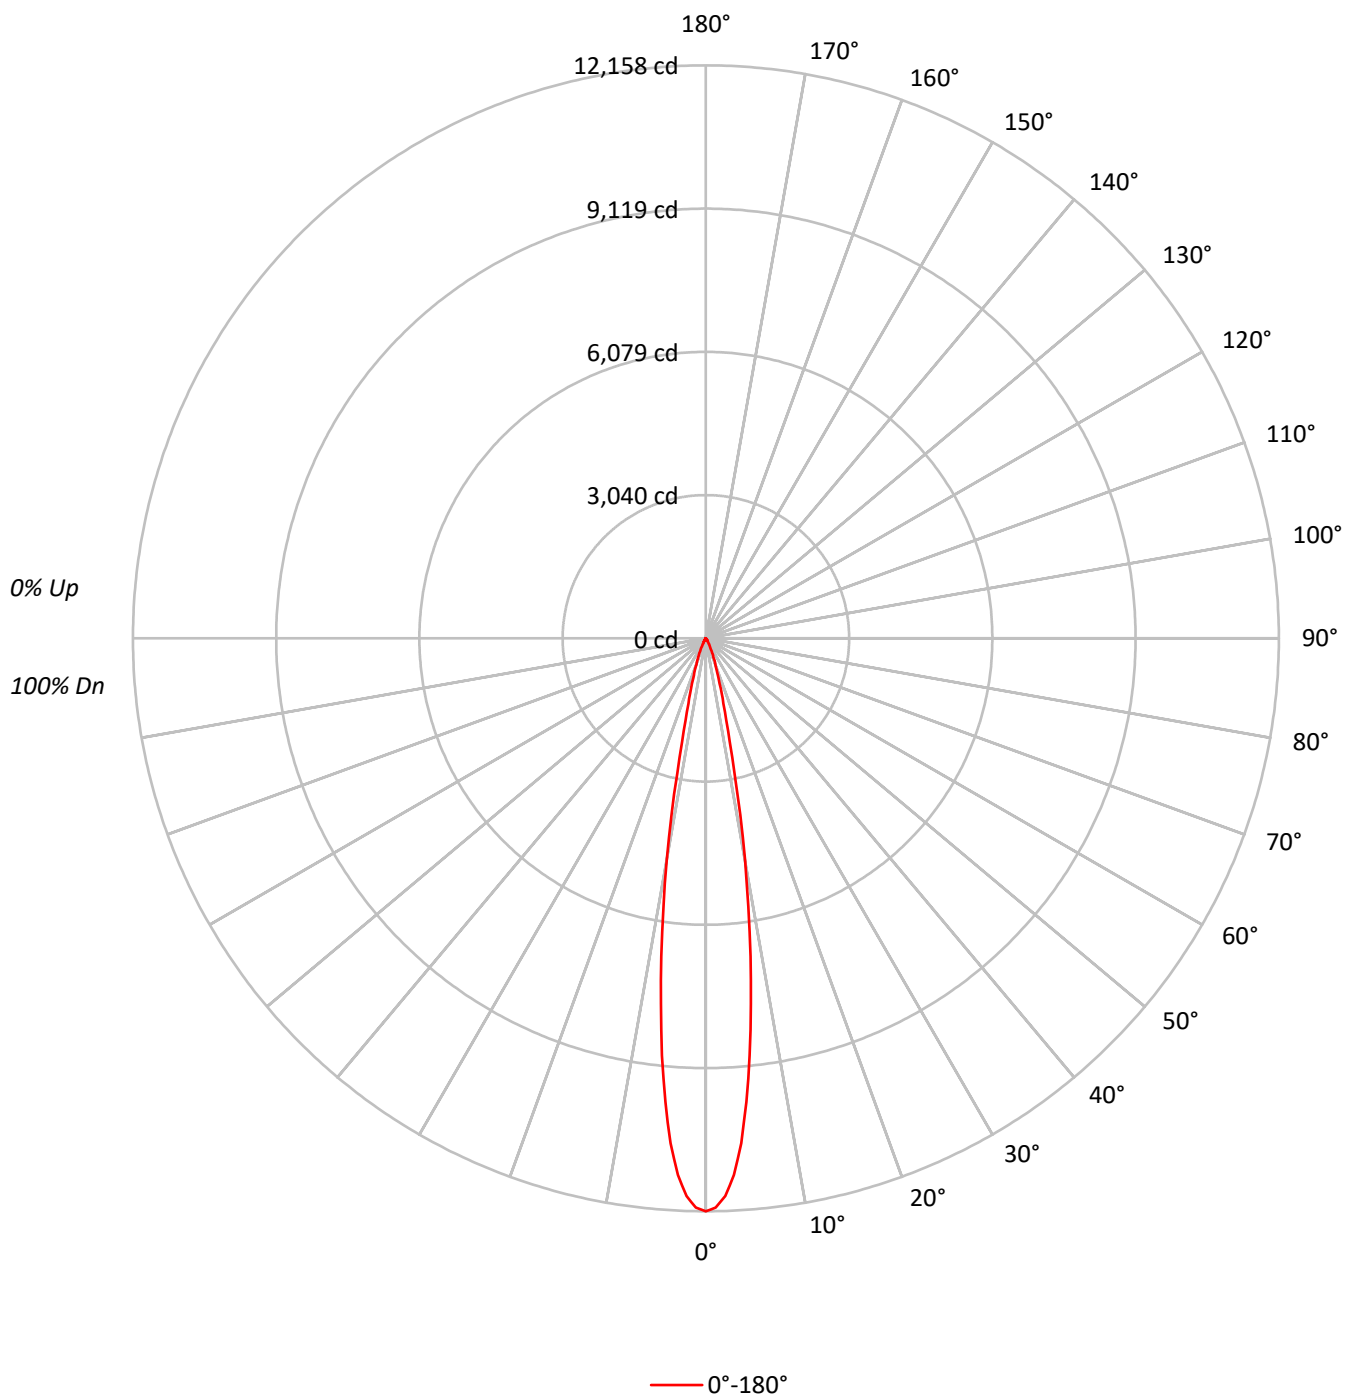



TEST NUMBER: P1299304

CATALOG NUMBER: P3A17R15W2N902765DE010 E3D1LI_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	116	114	112	111		113	112	110	109		108	107	105		104	103	102		101	100	99		98			
2	112	109	107	105		110	108	105	103		105	103	101		102	100	99		99	98	97		96			
3	110	106	102	100		108	104	102	99		102	100	98		100	98	96		98	96	95		94			
4	107	102	99	96		106	101	98	96		99	97	95		98	96	94		96	94	93		92			
5	105	100	96	94		103	99	96	93		97	94	92		96	93	92		94	93	91		90			
6	102	97	94	91		101	96	93	91		95	92	90		94	92	90		93	91	89		88			
7	100	95	91	89		99	94	91	89		93	90	88		92	90	88		91	89	88		87			
8	98	93	89	87		97	92	89	87		91	89	87		91	88	86		90	88	86		85			
9	96	91	88	85		96	91	87	85		90	87	85		89	87	85		89	86	85		84			
10	95	89	86	84		94	89	86	84		88	85	83		88	85	83		87	85	83		82			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2665971
5°	2173910
10°	1064665
15°	325859
20°	138005
25°	62423
30°	24333
35°	11216
40°	3492
45°	1302
50°	546
55°	191
60°	219
65°	259
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1302 cd/sqm

TEST NUMBER: P1299304

CATALOG NUMBER: P3A17R15W2N902765DE010 E3D1LI_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	768.7	54.9
10°-20°	471.7	33.7
20°-30°	126.7	9.1
30°-40°	27.9	2.0
40°-50°	3.9	0.3
50°-60°	0.7	0.0
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1367.2	97.7
0°-40°	1395.1	99.6
0°-60°	1399.7	100.0
0°-90°	1400.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1400.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12158	
5°	9876	769
15°	1435	472
25°	258	127
35°	42	28
45°	4	4
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1299304

CATALOG NUMBER: P3A17R15W2N902765DE010 E3D1LI_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	12157.8
1°	12081.8
2°	11838.2
3°	11399.2
4°	10738.2
5°	9876.1
6°	8900.9
7°	7814.8
8°	6816.8
9°	5758.8
10°	4781.5
11°	3814.2
12°	2934.6
13°	2257.2
14°	1786.9
15°	1435.4
17.5°	889.7
20°	591.4
22.5°	398.1
25°	258.0
27.5°	152.9
30°	96.1
32.5°	64.8
35°	41.9
37.5°	23.4
40°	12.2
42.5°	6.9
45°	4.2
47.5°	2.7
50°	1.6
52.5°	1.1
55°	0.5
57.5°	0.5
60°	0.5
62.5°	0.5
65°	0.5
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1299304

CATALOG NUMBER: P3A17R15W2N902765DE010 E3D1LI_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)