

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299367

Luminaire Tested: P3A17R15W2N902765DE010 E3DLD1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299367
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R15W2N902765DE010 E3DLD1GPH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 4000K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 469.0 lumens
Efficiency: N/A
Efficacy: 24.2 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299367
CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLD1GPH_4000K

Luminous Intensity Polar Plot

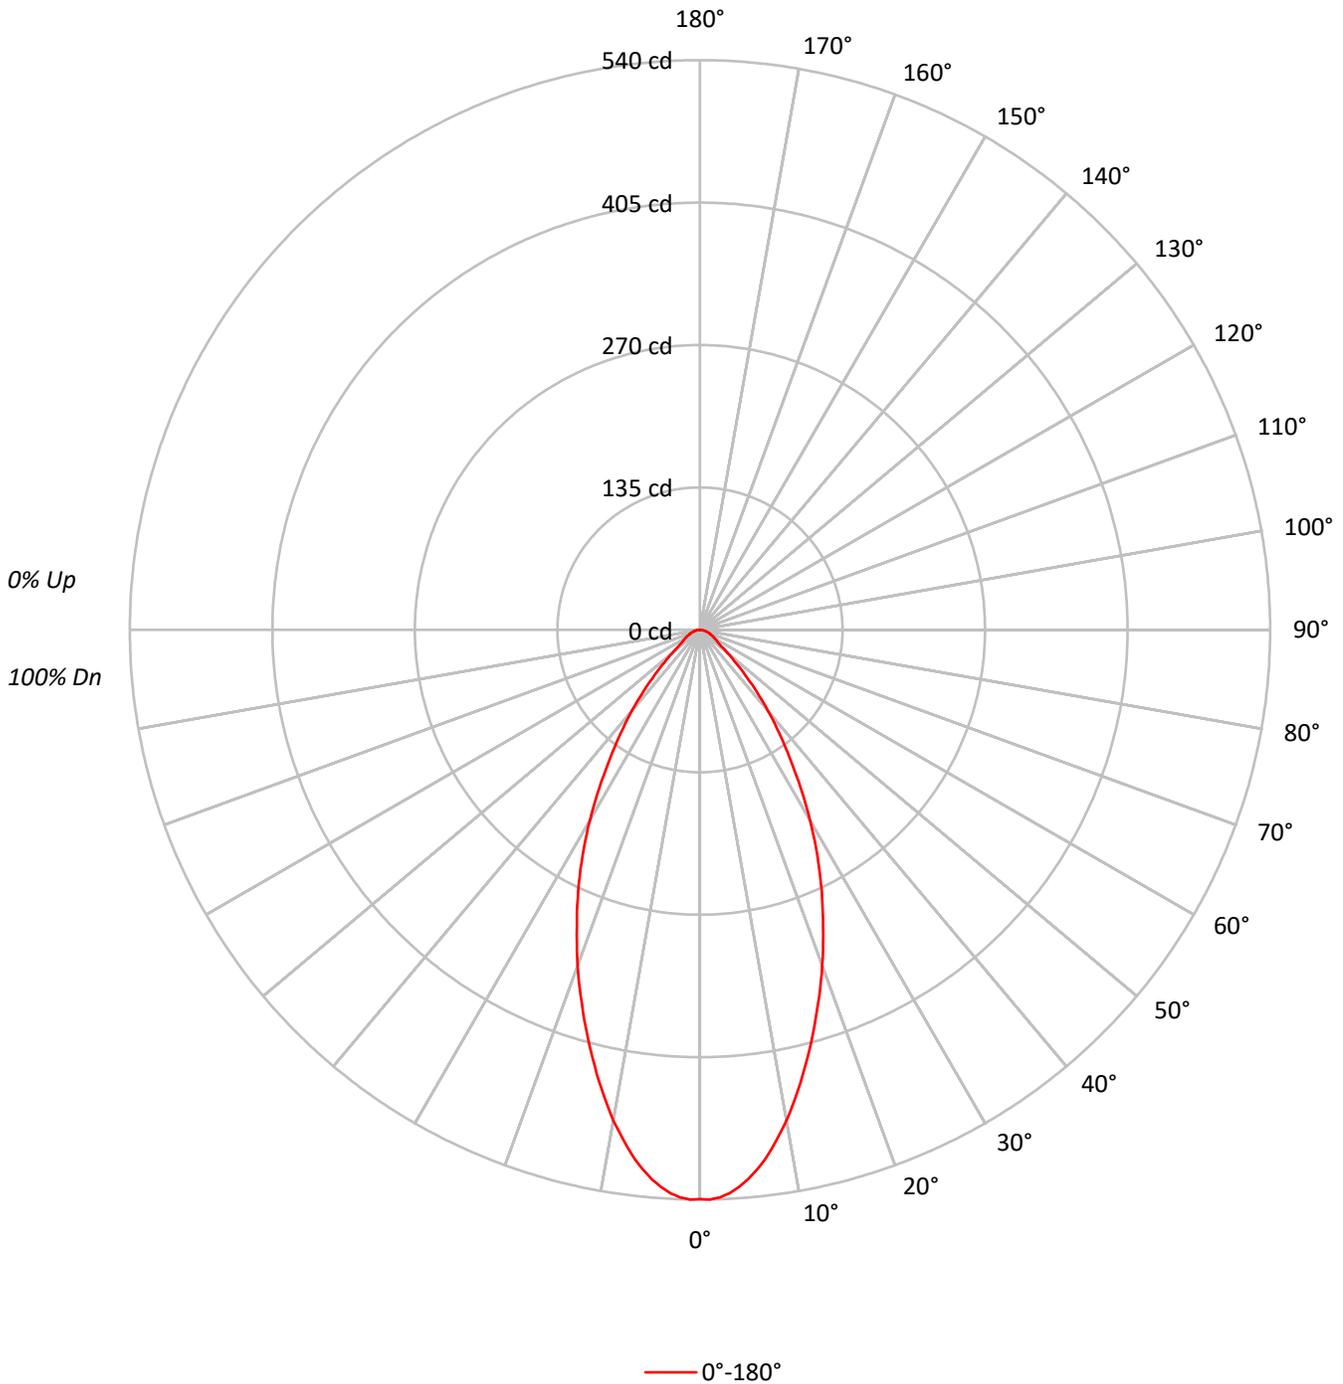



TEST NUMBER: P1299367

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLD1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | |
| RCR | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | 100 |
| 1 | 113 | 109 | 106 | 104 | 110 | 107 | 105 | 102 | 103 | 101 | 99 | 99 | 98 | 96 | 96 | 95 | 93 | 91 | | | | 91 |
| 2 | 106 | 100 | 96 | 92 | 104 | 99 | 95 | 91 | 95 | 92 | 89 | 92 | 90 | 87 | 90 | 87 | 85 | 83 | | | | 83 |
| 3 | 100 | 93 | 87 | 83 | 98 | 91 | 86 | 82 | 89 | 84 | 81 | 86 | 82 | 79 | 84 | 81 | 78 | 76 | | | | 76 |
| 4 | 94 | 86 | 80 | 75 | 92 | 85 | 79 | 74 | 82 | 77 | 73 | 80 | 76 | 73 | 78 | 75 | 72 | 70 | | | | 70 |
| 5 | 89 | 80 | 73 | 68 | 87 | 79 | 73 | 68 | 77 | 72 | 67 | 75 | 71 | 67 | 74 | 69 | 66 | 65 | | | | 65 |
| 6 | 84 | 74 | 68 | 63 | 83 | 73 | 67 | 63 | 72 | 66 | 62 | 70 | 66 | 62 | 69 | 65 | 61 | 60 | | | | 60 |
| 7 | 80 | 69 | 63 | 58 | 78 | 69 | 63 | 58 | 67 | 62 | 58 | 66 | 61 | 57 | 65 | 61 | 57 | 56 | | | | 56 |
| 8 | 76 | 65 | 59 | 54 | 74 | 65 | 58 | 54 | 63 | 58 | 54 | 62 | 57 | 54 | 61 | 57 | 53 | 52 | | | | 52 |
| 9 | 72 | 61 | 55 | 51 | 71 | 61 | 55 | 51 | 60 | 54 | 50 | 59 | 54 | 50 | 58 | 53 | 50 | 49 | | | | 49 |
| 10 | 68 | 58 | 52 | 48 | 67 | 57 | 51 | 47 | 57 | 51 | 47 | 56 | 51 | 47 | 55 | 50 | 47 | 46 | | | | 46 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 118302 |
| 5° | 115100 |
| 10° | 105164 |
| 15° | 92123 |
| 20° | 79037 |
| 25° | 65980 |
| 30° | 52793 |
| 35° | 39592 |
| 40° | 28740 |
| 45° | 18793 |
| 50° | 11769 |
| 55° | 7952 |
| 60° | 7017 |
| 65° | 6486 |
| 70° | 6091 |
| 75° | 5507 |
| 80° | 5304 |
| 85° | 4529 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18793 cd/sqm



TEST NUMBER: P1299367

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLD1GPH_4000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 48.2 | 10.3 |
| 10°-20° | 113.1 | 24.1 |
| 20°-30° | 124.6 | 26.6 |
| 30°-40° | 93.3 | 19.9 |
| 40°-50° | 48.3 | 10.3 |
| 50°-60° | 20.0 | 4.3 |
| 60°-70° | 12.4 | 2.6 |
| 70°-80° | 6.9 | 1.5 |
| 80°-90° | 2.0 | 0.4 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 285.9 | 61.0 |
| 0°-40° | 379.2 | 80.9 |
| 0°-60° | 447.6 | 95.4 |
| 0°-90° | 469.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 469.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 540 | |
| 5° | 523 | 48 |
| 15° | 406 | 113 |
| 25° | 273 | 125 |
| 35° | 148 | 93 |
| 45° | 61 | 48 |
| 55° | 21 | 20 |
| 65° | 12 | 12 |
| 75° | 6 | 7 |
| 85° | 2 | 2 |
| 90° | 0 | |



TEST NUMBER: P1299367
CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLD1GPH_4000K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|-------|
| 0° | 539.5 |
| 1° | 540.1 |
| 2° | 538.3 |
| 3° | 534.7 |
| 4° | 529.4 |
| 5° | 522.9 |
| 6° | 514.5 |
| 7° | 505.6 |
| 8° | 494.9 |
| 9° | 483.6 |
| 10° | 472.3 |
| 12.5° | 439.7 |
| 15° | 405.8 |
| 17.5° | 371.9 |
| 20° | 338.7 |
| 22.5° | 304.8 |
| 25° | 272.7 |
| 27.5° | 240.6 |
| 30° | 208.5 |
| 32.5° | 177.1 |
| 35° | 147.9 |
| 37.5° | 123.0 |
| 40° | 100.4 |
| 42.5° | 79.6 |
| 45° | 60.6 |
| 47.5° | 45.7 |
| 50° | 34.5 |
| 52.5° | 25.5 |
| 55° | 20.8 |
| 57.5° | 18.4 |
| 60° | 16.0 |
| 62.5° | 14.3 |
| 65° | 12.5 |
| 67.5° | 10.7 |
| 70° | 9.5 |
| 72.5° | 7.7 |
| 75° | 6.5 |
| 77.5° | 5.3 |
| 80° | 4.2 |
| 82.5° | 3.0 |
| 85° | 1.8 |
| 87.5° | 0.6 |
| 90° | 0.0 |

(END OF REPORT)