

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299398

Luminaire Tested: P3A17R15W2N902765DE010 E3DLD1WMH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299398
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R15W2N902765DE010 E3DLD1WMH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 5000K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 951.0 lumens
Efficiency: N/A
Efficacy: 49.0 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299398

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLD1WMH_5000K

Luminous Intensity Polar Plot

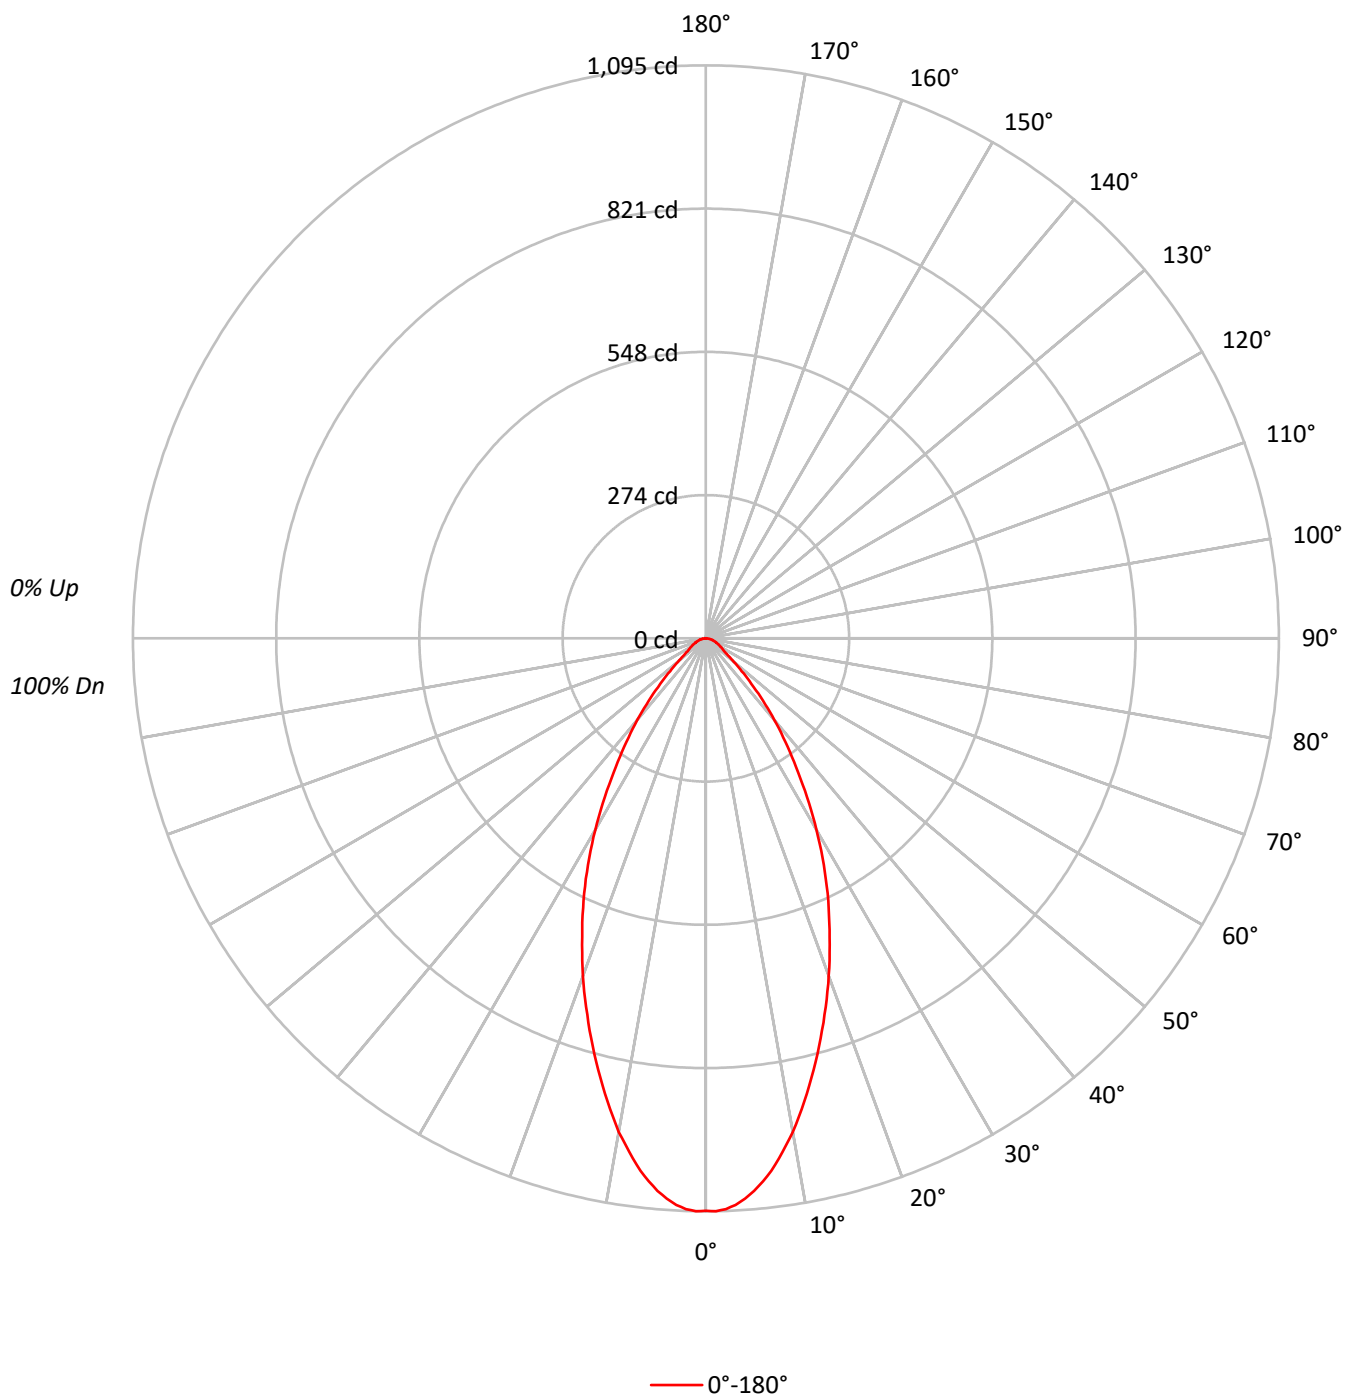



TEST NUMBER: P1299398

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLD1WMH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	95	91	95	92	89		92	90	87		90
3	100	93	87	83	98	91	86	82	89	84	81		86	82	79		84
4	94	86	80	75	92	85	79	74	82	77	73		80	76	73		78
5	89	80	73	68	87	79	73	68	77	72	67		75	71	67		74
6	84	74	68	63	83	73	67	63	72	66	62		70	66	62		69
7	80	69	63	58	78	69	63	58	67	62	58		66	61	57		65
8	76	65	59	54	74	65	58	54	63	58	54		62	57	54		61
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	52	48	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	239871
5°	233369
10°	213267
15°	186812
20°	160244
25°	133798
30°	107080
35°	80308
40°	58281
45°	38112
50°	23846
55°	16133
60°	14253
65°	13127
70°	12374
75°	11268
80°	10607
85°	9057

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 38112 cd/sqm

TEST NUMBER: P1299398

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLD1WMH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.8	10.3
10°-20°	229.3	24.1
20°-30°	252.6	26.6
30°-40°	189.2	19.9
40°-50°	98.1	10.3
50°-60°	40.6	4.3
60°-70°	25.2	2.6
70°-80°	14.1	1.5
80°-90°	4.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	579.7	61.0
0°-40°	768.9	80.9
0°-60°	907.6	95.4
0°-90°	951.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	951.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1094	
5°	1060	98
15°	823	229
25°	553	253
35°	300	189
45°	123	98
55°	42	41
65°	25	25
75°	13	14
85°	4	4
90°	0	



TEST NUMBER: P1299398

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLD1WMH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1093.9
1°	1095.1
2°	1091.5
3°	1084.3
4°	1073.4
5°	1060.2
6°	1043.3
7°	1025.3
8°	1003.6
9°	980.7
10°	957.8
12.5°	891.5
15°	822.9
17.5°	754.2
20°	686.7
22.5°	618.0
25°	553.0
27.5°	487.9
30°	422.9
32.5°	359.0
35°	300.0
37.5°	249.4
40°	203.6
42.5°	161.4
45°	122.9
47.5°	92.8
50°	69.9
52.5°	51.8
55°	42.2
57.5°	37.3
60°	32.5
62.5°	28.9
65°	25.3
67.5°	21.7
70°	19.3
72.5°	15.7
75°	13.3
77.5°	10.8
80°	8.4
82.5°	6.0
85°	3.6
87.5°	1.2
90°	0.0

(END OF REPORT)