

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299409

Luminaire Tested: P3A17R15W2N902765DE010 E3DLP1H\_4000K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1299409  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A17R15W2N902765DE010 E3DLP1H\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 4000K CCT AND, 90CRI ,  
E3DLP1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 745.9 lumens  
Efficiency: N/A  
Efficacy: 38.5 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1299409

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLP1H\_4000K

### Luminous Intensity Polar Plot

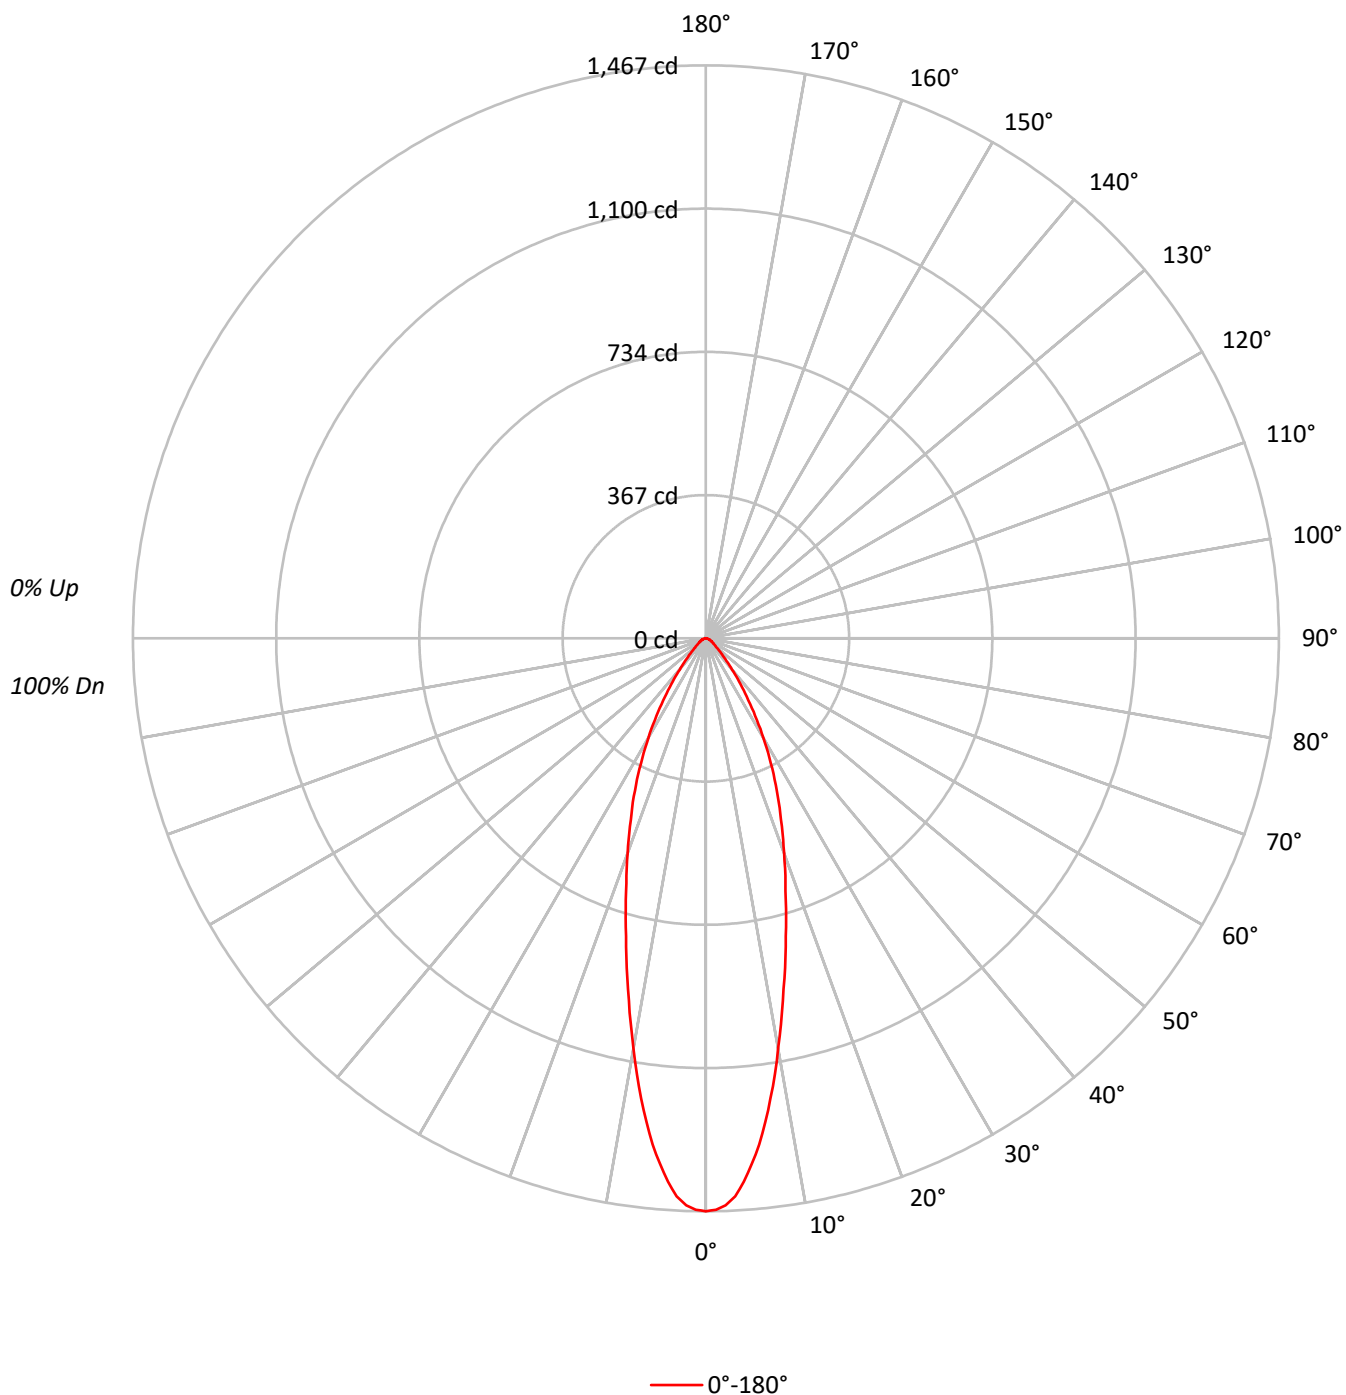

TEST NUMBER: P1299409

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLP1H\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 | 100 |
| 1   | 113 | 110 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 102 | 101 |  | 100 | 99  | 98  |  | 97  | 96  | 95  | 93  |
| 2   | 108 | 103 | 98  | 95  | 105 | 101 | 97  | 94  | 98  | 95  | 92  |  | 95  | 92  | 90  |  | 92  | 90  | 88  | 86  |
| 3   | 102 | 96  | 91  | 87  | 100 | 94  | 90  | 86  | 92  | 88  | 85  |  | 89  | 86  | 83  |  | 87  | 84  | 82  | 80  |
| 4   | 97  | 90  | 84  | 80  | 95  | 88  | 83  | 79  | 86  | 82  | 78  |  | 84  | 81  | 78  |  | 82  | 79  | 77  | 75  |
| 5   | 93  | 84  | 78  | 74  | 91  | 83  | 78  | 74  | 81  | 77  | 73  |  | 80  | 76  | 72  |  | 78  | 75  | 72  | 70  |
| 6   | 88  | 79  | 73  | 69  | 87  | 79  | 73  | 69  | 77  | 72  | 69  |  | 76  | 71  | 68  |  | 74  | 71  | 68  | 66  |
| 7   | 84  | 75  | 69  | 65  | 83  | 74  | 69  | 65  | 73  | 68  | 64  |  | 72  | 67  | 64  |  | 71  | 67  | 64  | 62  |
| 8   | 80  | 71  | 65  | 61  | 79  | 71  | 65  | 61  | 69  | 64  | 61  |  | 68  | 64  | 61  |  | 68  | 63  | 60  | 59  |
| 9   | 77  | 68  | 62  | 58  | 76  | 67  | 62  | 58  | 66  | 61  | 58  |  | 65  | 61  | 57  |  | 64  | 60  | 57  | 56  |
| 10  | 74  | 64  | 59  | 55  | 73  | 64  | 59  | 55  | 63  | 58  | 55  |  | 62  | 58  | 55  |  | 62  | 57  | 54  | 53  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 321685 |
| 5°  | 297314 |
| 10° | 237381 |
| 15° | 179297 |
| 20° | 136535 |
| 25° | 104062 |
| 30° | 74543  |
| 35° | 48640  |
| 40° | 29827  |
| 45° | 18017  |
| 50° | 11974  |
| 55° | 9252   |
| 60° | 7982   |
| 65° | 6901   |
| 70° | 6219   |
| 75° | 6185   |
| 80° | 4546   |
| 85° | 3019   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18017 cd/sqm

TEST NUMBER: P1299409

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLP1H\_4000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 119.7  | 16.0      |
| 10°-20°   | 220.8  | 29.6      |
| 20°-30°   | 196.5  | 26.3      |
| 30°-40°   | 116.3  | 15.6      |
| 40°-50°   | 47.7   | 6.4       |
| 50°-60°   | 22.4   | 3.0       |
| 60°-70°   | 13.6   | 1.8       |
| 70°-80°   | 7.2    | 1.0       |
| 80°-90°   | 1.8    | 0.2       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 537.0  | 72.0      |
| 0°-40°    | 653.3  | 87.6      |
| 0°-60°    | 723.4  | 97.0      |
| 0°-90°    | 745.9  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 745.9  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1467 |      |
| 5°  | 1351 | 120  |
| 15° | 790  | 221  |
| 25° | 430  | 197  |
| 35° | 182  | 116  |
| 45° | 58   | 48   |
| 55° | 24   | 22   |
| 65° | 13   | 14   |
| 75° | 7    | 7    |
| 85° | 1    | 2    |
| 90° | 0    |      |

TEST NUMBER: P1299409

CATALOG NUMBER: P3A17R15W2N902765DE010 E3DLP1H\_4000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1467.0 |
| 1°    | 1463.4 |
| 2°    | 1452.5 |
| 3°    | 1430.7 |
| 4°    | 1394.3 |
| 5°    | 1350.7 |
| 6°    | 1303.5 |
| 7°    | 1247.8 |
| 8°    | 1189.6 |
| 9°    | 1130.3 |
| 10°   | 1066.1 |
| 12.5° | 919.5  |
| 15°   | 789.8  |
| 17.5° | 678.4  |
| 20°   | 585.1  |
| 22.5° | 502.7  |
| 25°   | 430.1  |
| 27.5° | 359.8  |
| 30°   | 294.4  |
| 32.5° | 235.0  |
| 35°   | 181.7  |
| 37.5° | 139.3  |
| 40°   | 104.2  |
| 42.5° | 77.5   |
| 45°   | 58.1   |
| 47.5° | 44.8   |
| 50°   | 35.1   |
| 52.5° | 29.1   |
| 55°   | 24.2   |
| 57.5° | 20.6   |
| 60°   | 18.2   |
| 62.5° | 15.7   |
| 65°   | 13.3   |
| 67.5° | 12.1   |
| 70°   | 9.7    |
| 72.5° | 8.5    |
| 75°   | 7.3    |
| 77.5° | 4.8    |
| 80°   | 3.6    |
| 82.5° | 2.4    |
| 85°   | 1.2    |
| 87.5° | 1.2    |
| 90°   | 0.0    |

(END OF REPORT)