

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299735

Luminaire Tested: P3A17R20W2N902765DE010 E3PHLP1MW_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299735
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R20W2N902765DE010 E3PHLP1MW_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 3000K CCT AND, 90CRI ,
E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 585.0 lumens
Efficiency: N/A
Efficacy: 30.2 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 0.55 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299735

CATALOG NUMBER: P3A17R20W2N902765DE010 E3PHLP1MW_3000K

Luminous Intensity Polar Plot

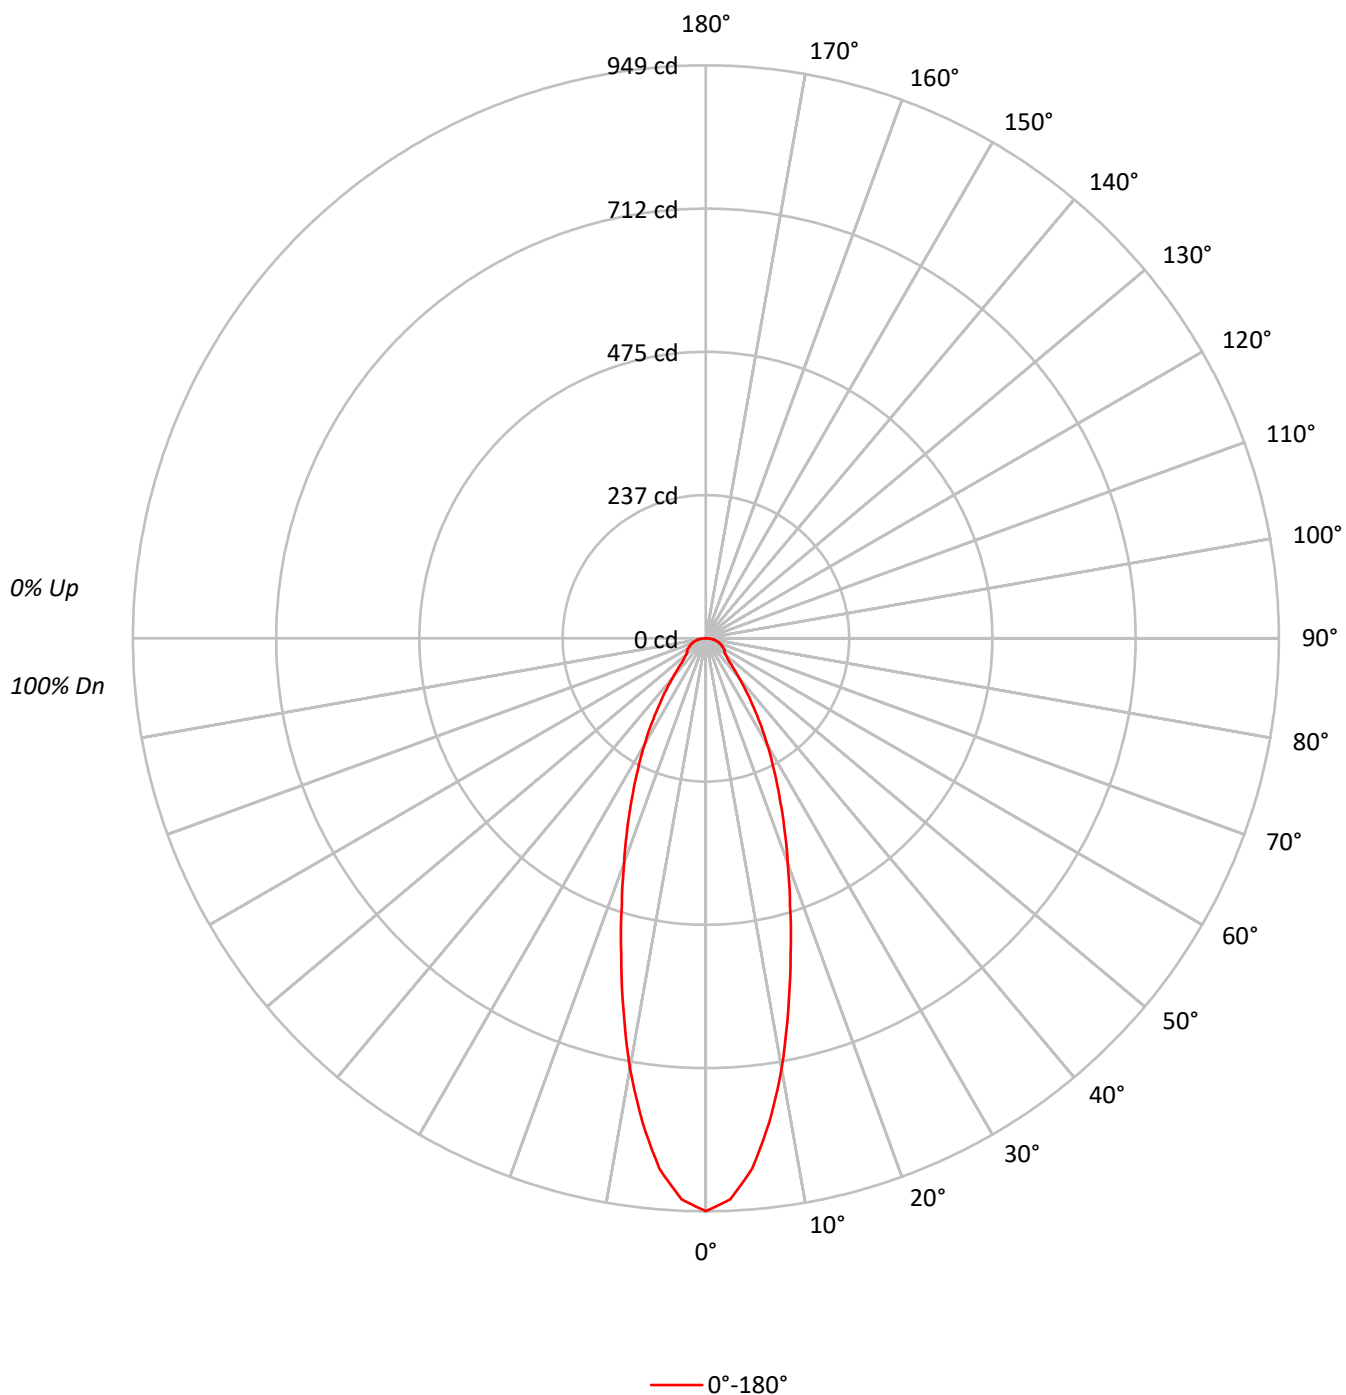

TEST NUMBER: P1299735

CATALOG NUMBER: P3A17R20W2N902765DE010 E3PHLP1MW_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97		98	96	95		95	93	92	90
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82	79	76	74
4	93	84	78	73	91	83	77	73	81	76	72		79	74	71		77	73	70	68
5	88	79	72	67	86	78	71	67	76	70	66		74	69	66		72	68	65	63
6	84	74	67	62	82	73	66	62	71	66	61		70	65	61		68	64	61	59
7	79	69	63	58	78	68	62	58	67	62	57		66	61	57		65	60	57	55
8	76	65	59	54	74	65	58	54	64	58	54		62	57	54		61	57	53	52
9	72	62	55	51	71	61	55	51	60	55	51		59	54	51		58	54	50	49
10	69	59	52	48	68	58	52	48	57	52	48		57	52	48		56	51	48	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	208032
5°	194056
10°	161008
15°	123134
20°	92408
25°	69560
30°	51451
35°	35951
40°	24646
45°	17087
50°	14669
55°	14489
60°	15087
65°	15203
70°	15451
75°	16013
80°	17426
85°	17360

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 82.5°

Luminance: 20328 cd/sqm

TEST NUMBER: P1299735

CATALOG NUMBER: P3A17R20W2N902765DE010 E3PHLP1MW_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.0	13.5
10°-20°	150.8	25.8
20°-30°	132.7	22.7
30°-40°	85.6	14.6
40°-50°	45.4	7.8
50°-60°	34.1	5.8
60°-70°	29.0	5.0
70°-80°	20.4	3.5
80°-90°	8.0	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	362.5	62.0
0°-40°	448.1	76.6
0°-60°	527.6	90.2
0°-90°	585.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	585.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	949	
5°	882	79
15°	542	151
25°	288	133
35°	134	86
45°	55	45
55°	38	34
65°	29	29
75°	19	20
85°	7	8
90°	0	



TEST NUMBER: P1299735

CATALOG NUMBER: P3A17R20W2N902765DE010 E3PHLP1MW_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	948.7
2.5°	929.8
5°	881.6
7.5°	807.5
10°	723.1
12.5°	630.2
15°	542.4
17.5°	463.2
20°	396.0
22.5°	339.2
25°	287.5
27.5°	242.8
30°	203.2
32.5°	167.0
35°	134.3
37.5°	108.5
40°	86.1
42.5°	68.9
45°	55.1
47.5°	48.2
50°	43.0
52.5°	39.6
55°	37.9
57.5°	36.2
60°	34.4
62.5°	31.0
65°	29.3
67.5°	27.5
70°	24.1
72.5°	22.4
75°	18.9
77.5°	17.2
80°	13.8
82.5°	12.1
85°	6.9
87.5°	3.4
90°	0.0

(END OF REPORT)