

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300075

Luminaire Tested: P3A17R25W2N902765DE010 E3PH1MW_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300075
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R25W2N902765DE010 E3PH1MW_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 3000K CCT AND, 90CRI ,
E3PH1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1269.0 lumens
Efficiency: N/A
Efficacy: 65.4 lumens/watt
Spacing Criteria (0/90/45): 0.36 / 0.36 / 0.36
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300075

CATALOG NUMBER: P3A17R25W2N902765DE010 E3PH1MW_3000K

Luminous Intensity Polar Plot

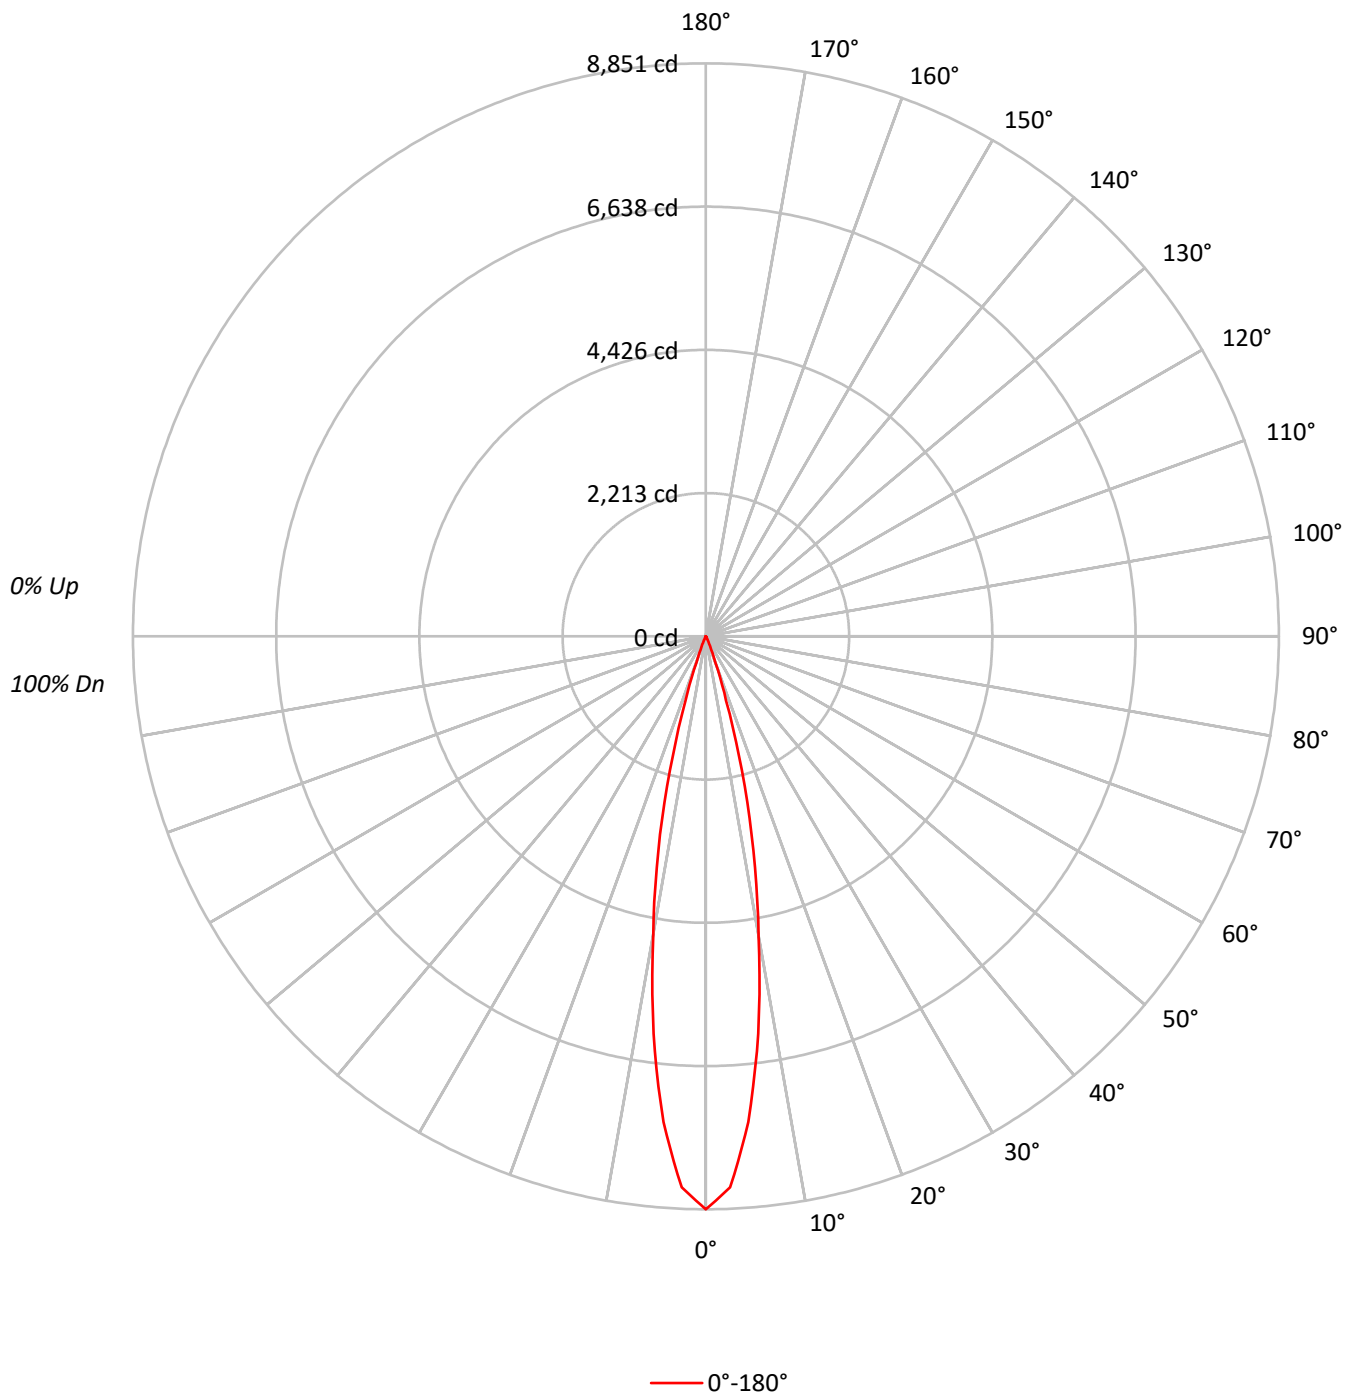



TEST NUMBER: P1300075

CATALOG NUMBER: P3A17R25W2N902765DE010 E3PH1MW_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	116	114	112	111		113	112	110	109		108	107	106		104	103	102		101	100	99
2	113	109	107	105		111	108	105	103		105	103	101		102	100	99		99	98	97
3	110	106	103	100		108	104	102	99		102	100	98		100	98	96		98	96	95
4	107	103	99	97		106	102	99	96		100	97	95		98	96	94		96	95	93
5	105	100	96	94		103	99	96	93		97	95	93		96	94	92		95	93	91
6	102	97	94	91		101	97	93	91		95	93	91		94	92	90		93	91	89
7	100	95	92	89		99	95	91	89		94	91	89		93	90	88		92	89	88
8	98	93	90	87		98	93	89	87		92	89	87		91	88	87		90	88	86
9	97	91	88	86		96	91	88	85		90	87	85		89	87	85		89	86	85
10	95	89	86	84		94	89	86	84		88	86	84		88	85	83		87	85	83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1940875
5°	1657645
10°	1045093
15°	486382
20°	100155
25°	20445
30°	4355
35°	910
40°	487
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 0 cd/sqm

TEST NUMBER: P1300075

CATALOG NUMBER: P3A17R25W2N902765DE010 E3PH1MW_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	627.6	49.5
10°-20°	582.9	45.9
20°-30°	55.1	4.3
30°-40°	3.2	0.3
40°-50°	0.2	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1265.6	99.7
0°-40°	1268.8	100.0
0°-60°	1269.0	100.0
0°-90°	1269.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1269.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8851	
5°	7531	628
15°	2142	583
25°	84	55
35°	3	3
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1300075

CATALOG NUMBER: P3A17R25W2N902765DE010 E3PH1MW_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	8851.1
2.5°	8521.8
5°	7530.7
7.5°	6191.4
10°	4693.6
12.5°	3390.5
15°	2142.5
17.5°	1035.9
20°	429.2
22.5°	170.6
25°	84.5
27.5°	39.6
30°	17.2
32.5°	6.9
35°	3.4
37.5°	1.7
40°	1.7
42.5°	0.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)