

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300321

Luminaire Tested: P3A17R30W2N902765DE010 E3DL1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300321
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R30W2N902765DE010 E3DL1GPH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 4000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 629.0 lumens
Efficiency: N/A
Efficacy: 32.4 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300321

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DL1GPH_4000K

Luminous Intensity Polar Plot

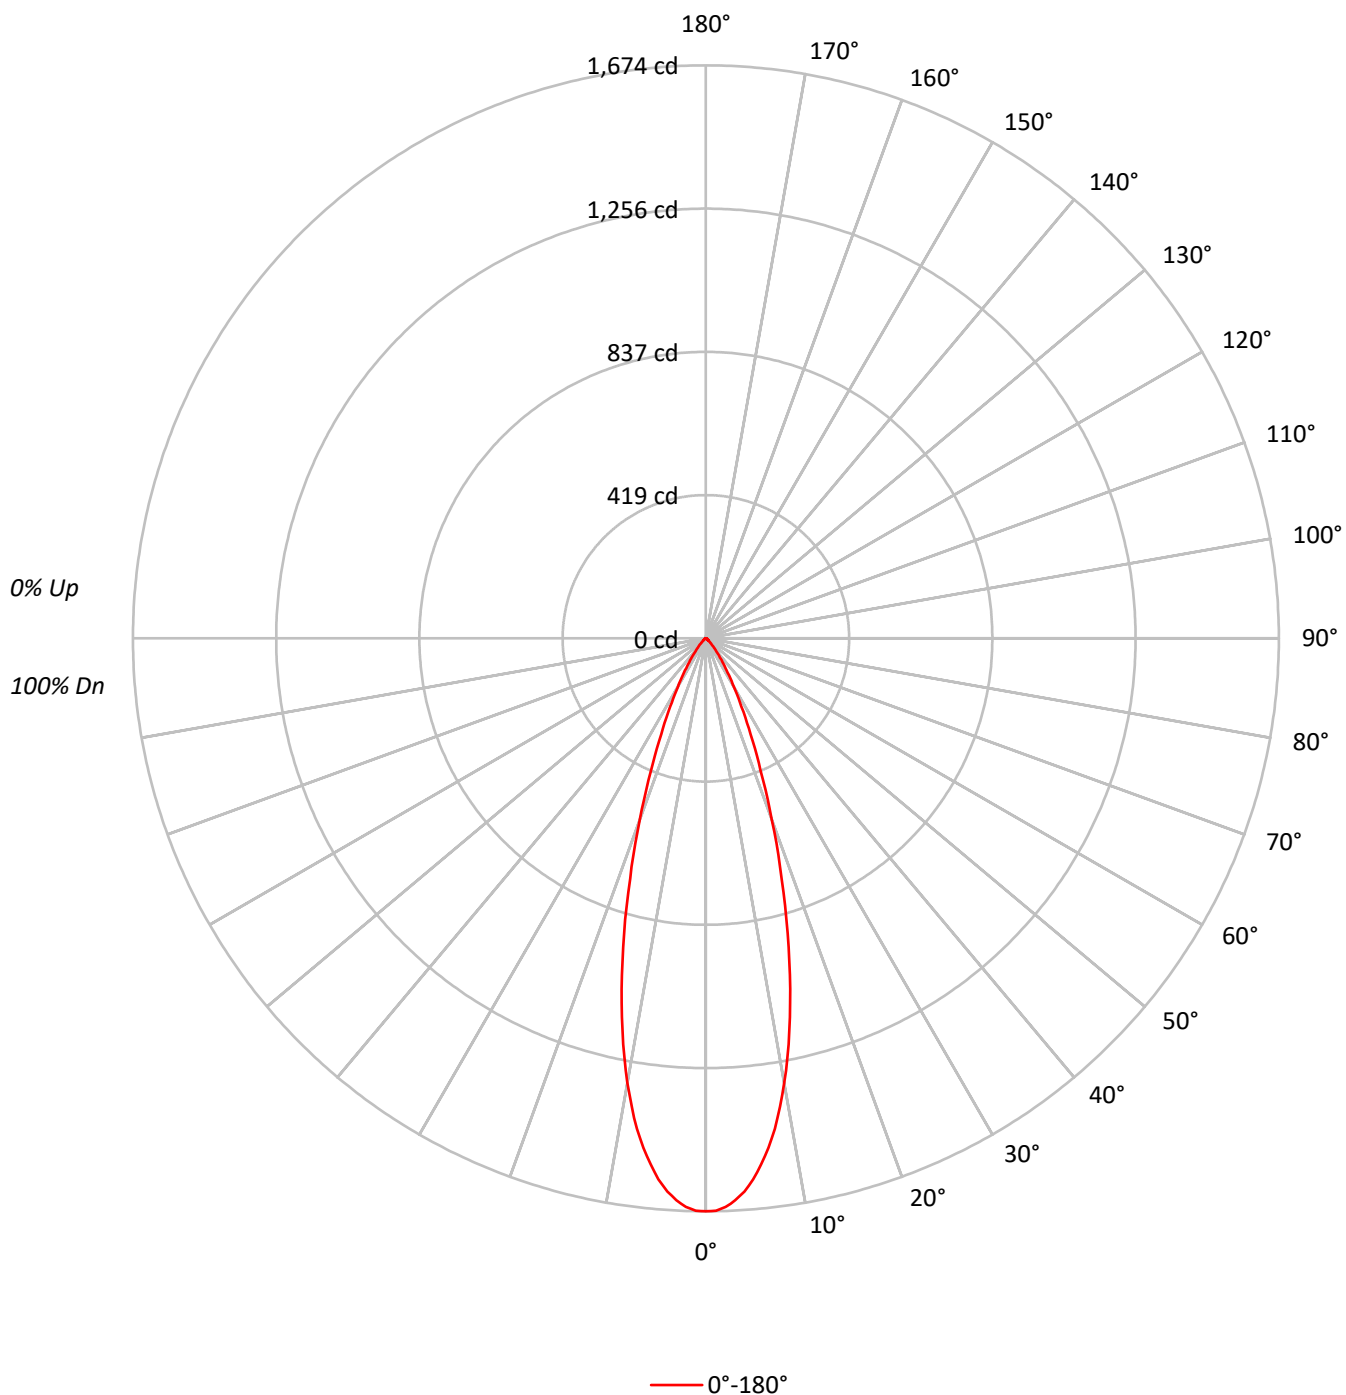



TEST NUMBER: P1300321

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DL1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		78
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	367032
5°	349350
10°	293849
15°	211919
20°	131448
25°	74762
30°	41525
35°	22593
40°	11908
45°	6450
50°	3446
55°	2256
60°	2105
65°	2179
70°	1923
75°	1525
80°	1515
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6450 cd/sqm

TEST NUMBER: P1300321

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DL1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	142.9	22.7
10°-20°	254.0	40.4
20°-30°	146.8	23.3
30°-40°	55.7	8.9
40°-50°	17.1	2.7
50°-60°	5.7	0.9
60°-70°	3.9	0.6
70°-80°	2.1	0.3
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	543.8	86.4
0°-40°	599.5	95.3
0°-60°	622.3	98.9
0°-90°	629.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	629.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1674	
5°	1587	143
15°	934	254
25°	309	147
35°	84	56
45°	21	17
55°	6	6
65°	4	4
75°	2	2
85°	1	1
90°	0	

TEST NUMBER: P1300321

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DL1GPH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1673.8
1°	1672.7
2°	1662.6
3°	1643.5
4°	1619.8
5°	1587.1
6°	1545.5
7°	1499.1
8°	1447.5
9°	1385.7
10°	1319.7
11°	1248.4
12°	1172.9
13°	1093.9
14°	1013.7
15°	933.5
17.5°	736.2
20°	563.3
22.5°	417.7
25°	309.0
27.5°	224.6
30°	164.0
32.5°	118.2
35°	84.4
37.5°	58.8
40°	41.6
42.5°	29.1
45°	20.8
47.5°	14.3
50°	10.1
52.5°	7.1
55°	5.9
57.5°	5.3
60°	4.8
62.5°	4.2
65°	4.2
67.5°	3.6
70°	3.0
72.5°	2.4
75°	1.8
77.5°	1.8
80°	1.2
82.5°	1.2
85°	0.6
87.5°	0.0



TEST NUMBER: P1300321

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DL1GPH_4000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)