

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300384

Luminaire Tested: P3A17R30W2N902765DE010 E3DLD1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300384
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R30W2N902765DE010 E3DLD1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 2700K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 882.0 lumens
Efficiency: N/A
Efficacy: 45.5 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300384

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DLD1WMH_2700K

Luminous Intensity Polar Plot

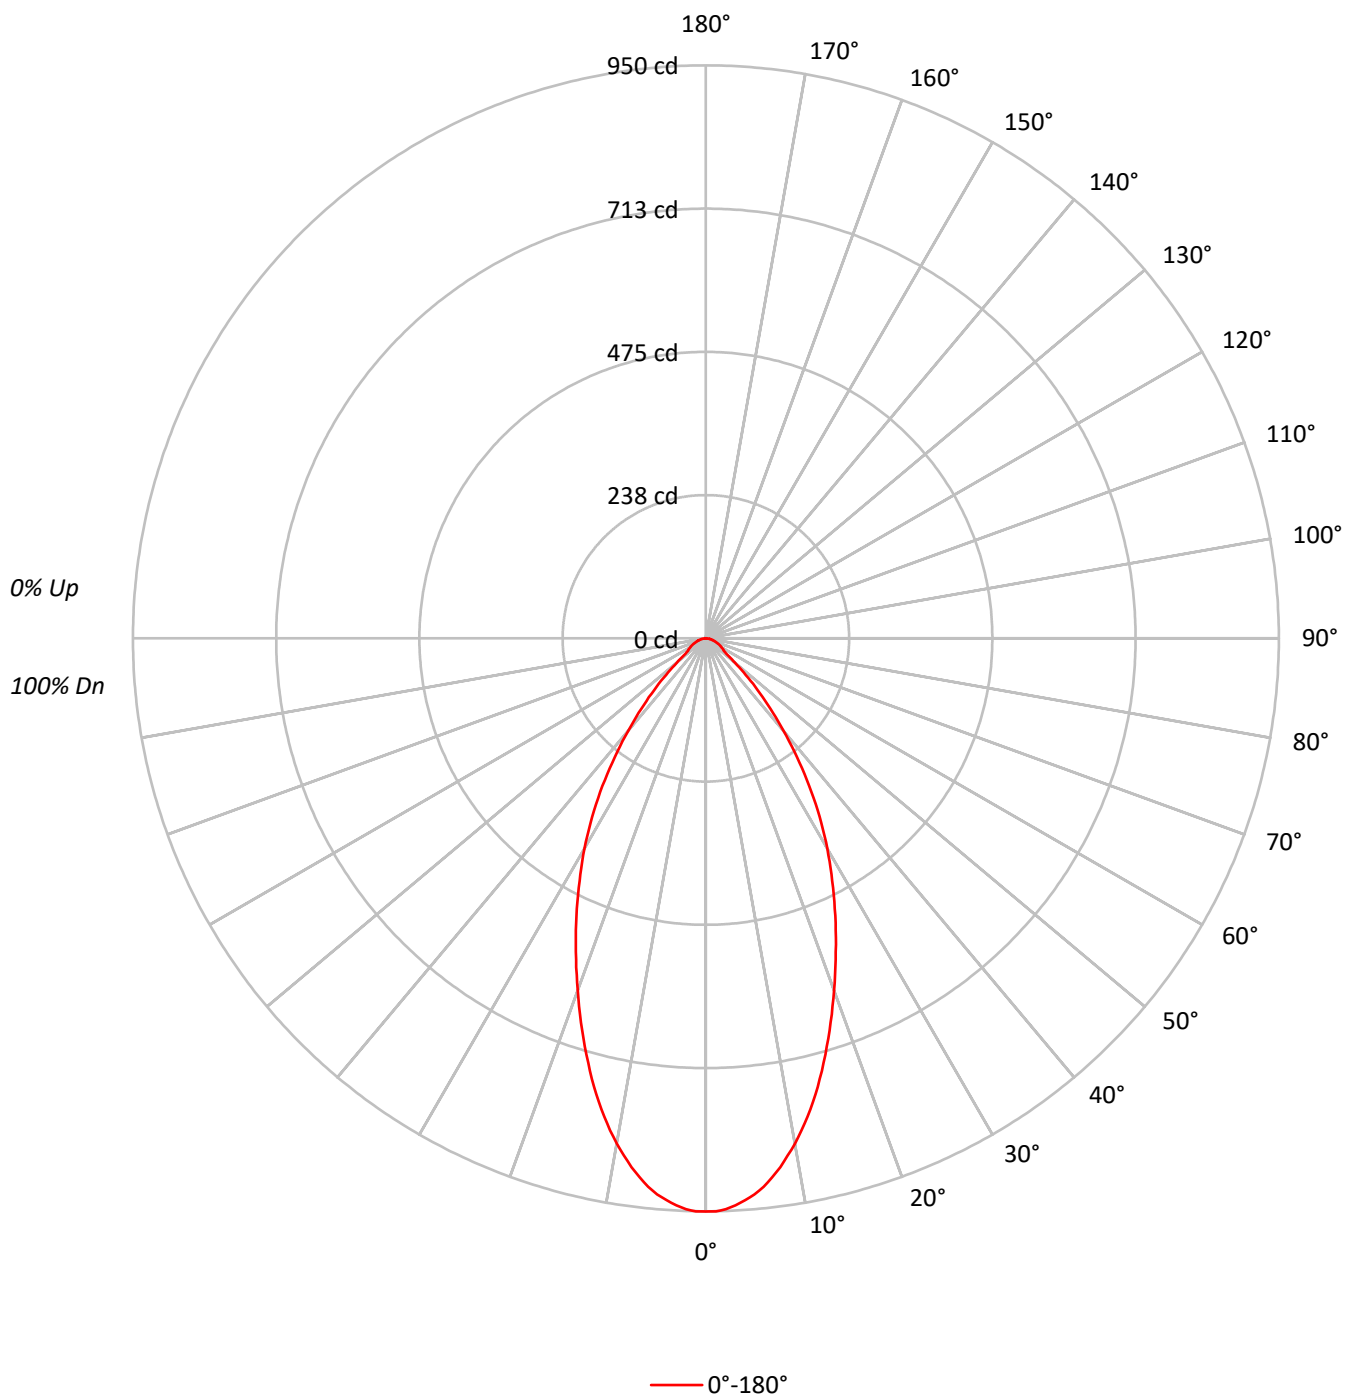

TEST NUMBER: P1300384

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DLD1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	85	79	74	92	84	79	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	208382
5°	203697
10°	189420
15°	168559
20°	144959
25°	122814
30°	101940
35°	79960
40°	57307
45°	37585
50°	21424
55°	14069
60°	13288
65°	12349
70°	11092
75°	10082
80°	9597
85°	8051

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 37585 cd/sqm

TEST NUMBER: P1300384

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DLD1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.9	9.7
10°-20°	206.4	23.4
20°-30°	232.6	26.4
30°-40°	185.7	21.1
40°-50°	95.5	10.8
50°-60°	35.9	4.1
60°-70°	23.6	2.7
70°-80°	12.7	1.4
80°-90°	3.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	524.9	59.5
0°-40°	710.7	80.6
0°-60°	842.1	95.5
0°-90°	882.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	882.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	950	
5°	925	86
15°	742	206
25°	508	233
35°	299	186
45°	121	95
55°	37	36
65°	24	24
75°	12	13
85°	3	4
90°	0	

TEST NUMBER: P1300384

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DLD1WMH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	950.3
1°	950.3
2°	947.0
3°	941.6
4°	934.0
5°	925.4
6°	914.5
7°	900.5
8°	885.3
9°	868.0
10°	850.7
11°	831.2
12°	810.6
13°	789.0
14°	766.3
15°	742.5
17.5°	681.8
20°	621.2
22.5°	562.8
25°	507.6
27.5°	453.5
30°	402.6
32.5°	350.7
35°	298.7
37.5°	247.8
40°	200.2
42.5°	158.0
45°	121.2
47.5°	89.8
50°	62.8
52.5°	44.4
55°	36.8
57.5°	33.6
60°	30.3
62.5°	27.1
65°	23.8
67.5°	20.6
70°	17.3
72.5°	14.1
75°	11.9
77.5°	9.7
80°	7.6
82.5°	5.4
85°	3.2
87.5°	1.1



TEST NUMBER: P1300384

CATALOG NUMBER: P3A17R30W2N902765DE010 E3DLD1WMH_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)