

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300674

Luminaire Tested: P3A17R35W2N902765DE010 E3DLD1LI_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300674
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R35W2N902765DE010 E3DLD1LI_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 2700K CCT AND, 90CRI ,
E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 876.0 lumens
Efficiency: N/A
Efficacy: 45.2 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300674

CATALOG NUMBER: P3A17R35W2N902765DE010 E3DLD1LI_2700K

Luminous Intensity Polar Plot

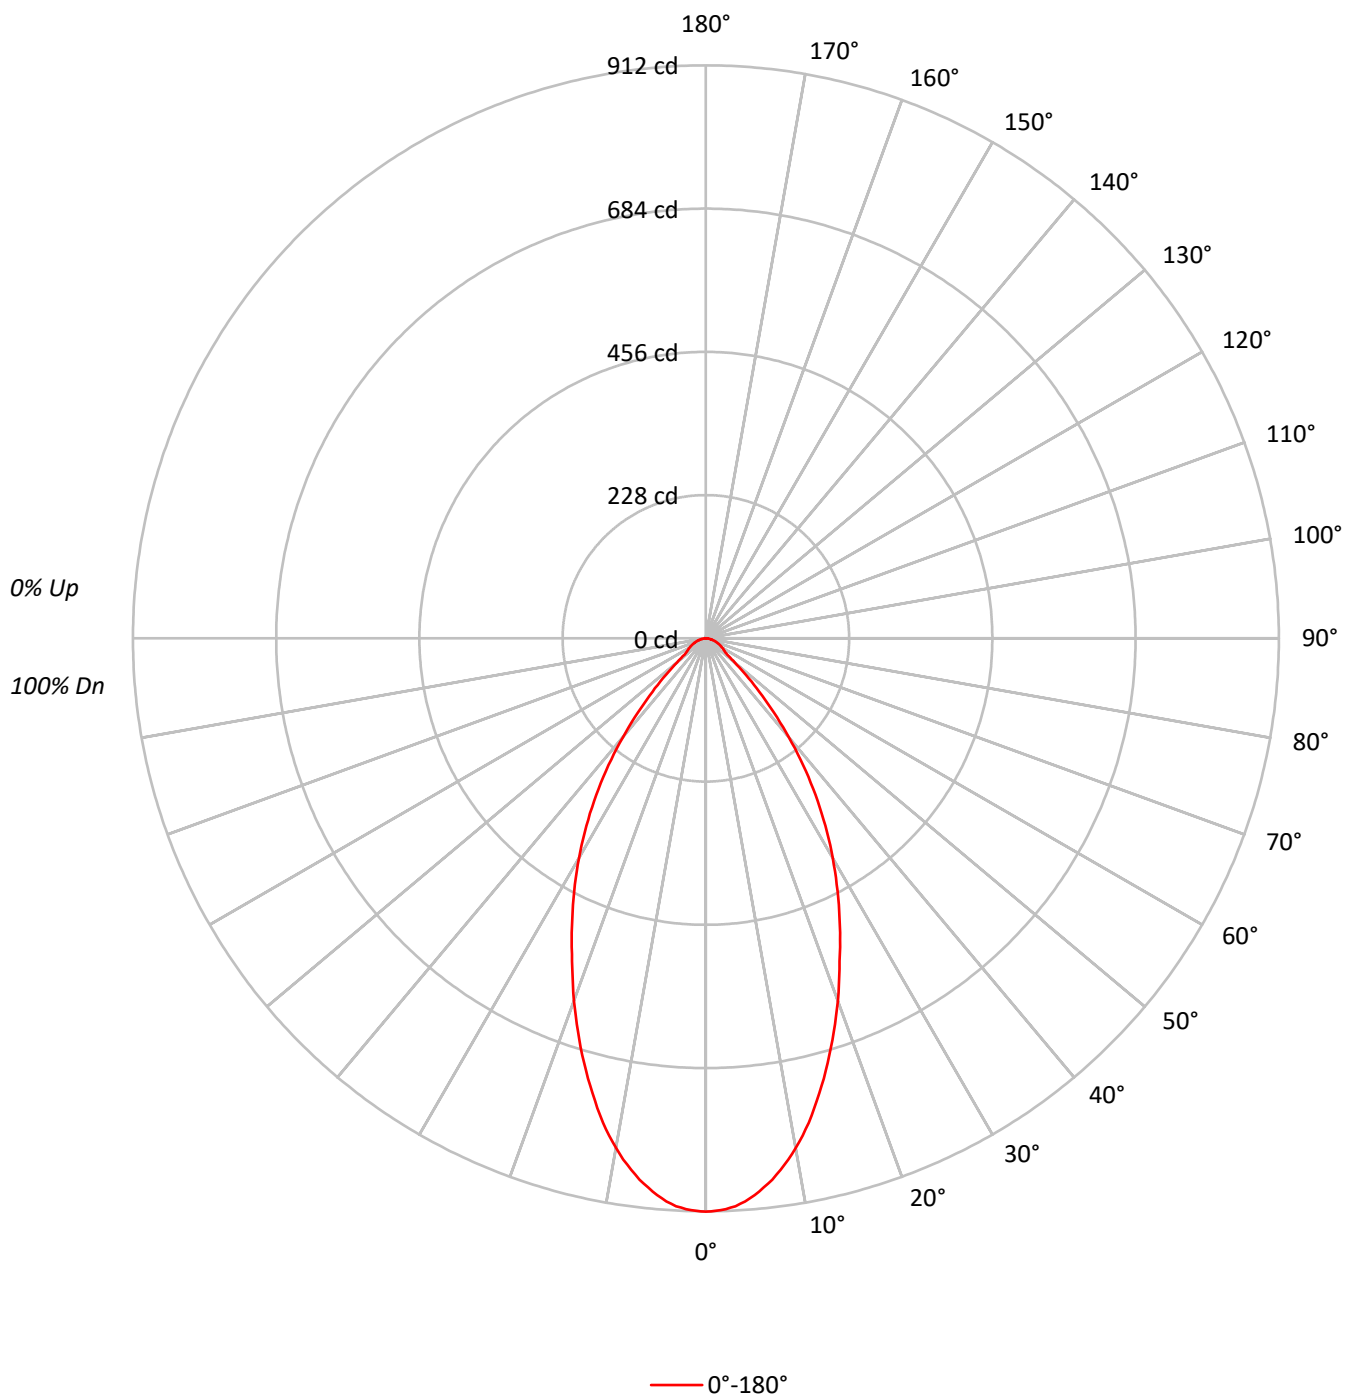

TEST NUMBER: P1300674

CATALOG NUMBER: P3A17R35W2N902765DE010 E3DLD1LI_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96	94	93		91
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89	87	85		83
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83	80	78		76
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78	74	71		69
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73	69	66		64
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68	64	61		59
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64	60	56		55
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61	56	52		51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49		48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46		45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	200094
5°	195861
10°	183430
15°	164655
20°	143232
25°	122039
30°	102244
35°	81432
40°	58882
45°	37275
50°	20298
55°	14069
60°	13288
65°	12349
70°	11797
75°	10082
80°	9597
85°	8051

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 37275 cd/sqm

TEST NUMBER: P1300674

CATALOG NUMBER: P3A17R35W2N902765DE010 E3DLD1LI_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	82.8	9.5
10°-20°	201.8	23.0
20°-30°	231.3	26.4
30°-40°	188.8	21.5
40°-50°	95.2	10.9
50°-60°	35.4	4.0
60°-70°	23.7	2.7
70°-80°	13.1	1.5
80°-90°	4.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	515.9	58.9
0°-40°	704.7	80.4
0°-60°	835.2	95.3
0°-90°	876.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	876.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	912	
5°	890	83
15°	725	202
25°	504	231
35°	304	189
45°	120	95
55°	37	35
65°	24	24
75°	12	13
85°	3	4
90°	0	

TEST NUMBER: P1300674

CATALOG NUMBER: P3A17R35W2N902765DE010 E3DLD1LI_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	912.5
1°	911.5
2°	909.3
3°	905.0
4°	898.5
5°	889.8
6°	879.0
7°	868.2
8°	854.1
9°	840.0
10°	823.8
11°	806.5
12°	788.1
13°	767.5
14°	745.8
15°	725.3
17.5°	670.1
20°	613.8
22.5°	556.4
25°	504.4
27.5°	453.6
30°	403.8
32.5°	354.0
35°	304.2
37.5°	254.4
40°	205.7
42.5°	160.2
45°	120.2
47.5°	86.6
50°	59.5
52.5°	43.3
55°	36.8
57.5°	33.6
60°	30.3
62.5°	27.1
65°	23.8
67.5°	20.6
70°	18.4
72.5°	15.2
75°	11.9
77.5°	9.7
80°	7.6
82.5°	5.4
85°	3.2
87.5°	2.2



TEST NUMBER: P1300674

CATALOG NUMBER: P3A17R35W2N902765DE010 E3DLD1LI_2700K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)