

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300867

Luminaire Tested: P3A17R40W2N902750DE010 E3DLP1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300867
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R40W2N902750DE010 E3DLP1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 2700K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 390.0 lumens
Efficiency: N/A
Efficacy: 20.1 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300867

CATALOG NUMBER: P3A17R40W2N902750DE010 E3DLP1GPH_2700K

Luminous Intensity Polar Plot

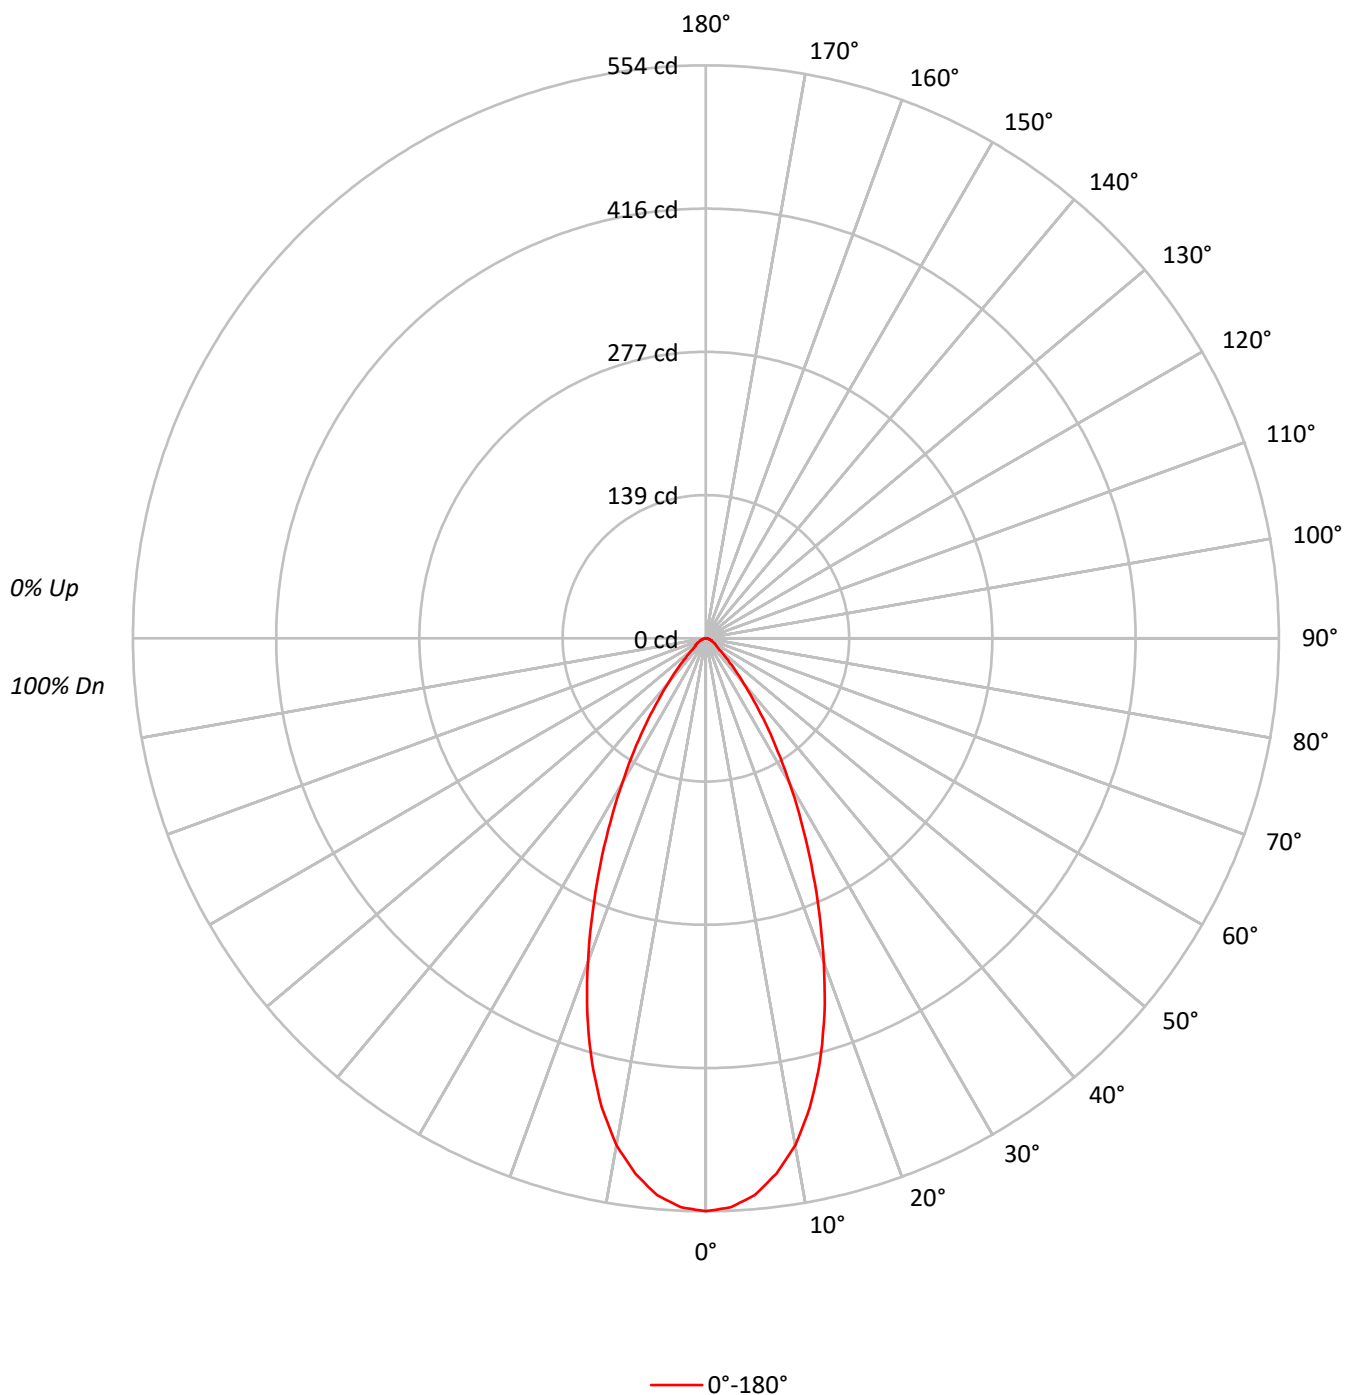

TEST NUMBER: P1300867

CATALOG NUMBER: P3A17R40W2N902750DE010 E3DLP1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	95	105	101	97	93	97	94	91	94	92	89	92	89	88	86		
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80		
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74		
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69		
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	65		
7	83	74	68	64	82	73	68	63	72	67	63	71	66	63	70	66	62	61		
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58		
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54		
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	121438
5°	118974
10°	110775
15°	96550
20°	77800
25°	58334
30°	40994
35°	26876
40°	16259
45°	9706
50°	5799
55°	4664
60°	4210
65°	3580
70°	3398
75°	2711
80°	2652
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 9706 cd/sqm

TEST NUMBER: P1300867

CATALOG NUMBER: P3A17R40W2N902750DE010 E3DLP1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.2	12.9
10°-20°	117.1	30.0
20°-30°	110.4	28.3
30°-40°	63.8	16.4
40°-50°	25.4	6.5
50°-60°	11.3	2.9
60°-70°	7.0	1.8
70°-80°	3.6	0.9
80°-90°	1.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	277.7	71.2
0°-40°	341.5	87.6
0°-60°	378.2	97.0
0°-90°	390.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	390.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	554	
5°	540	50
15°	425	117
25°	241	110
35°	100	64
45°	31	25
55°	12	11
65°	7	7
75°	3	4
85°	1	1
90°	0	

TEST NUMBER: P1300867

CATALOG NUMBER: P3A17R40W2N902750DE010 E3DLP1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	553.8
2.5°	550.6
5°	540.5
7.5°	521.9
10°	497.5
12.5°	464.6
15°	425.3
17.5°	381.2
20°	333.4
22.5°	285.7
25°	241.1
27.5°	199.6
30°	161.9
32.5°	129.0
35°	100.4
37.5°	75.9
40°	56.8
42.5°	42.5
45°	31.3
47.5°	22.8
50°	17.0
52.5°	13.8
55°	12.2
57.5°	11.2
60°	9.6
62.5°	8.0
65°	6.9
67.5°	5.8
70°	5.3
72.5°	4.2
75°	3.2
77.5°	2.7
80°	2.1
82.5°	1.6
85°	1.1
87.5°	0.5
90°	0.0

(END OF REPORT)