

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300898

Luminaire Tested: P3A17R40W2N902765DE010 E3CB1MB_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300898
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-24)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R40W2N902765DE010 E3CB1MB_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3000K CCT AND, 90CRI ,
E3CB1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1678.1 lumens
Efficiency: N/A
Efficacy: 86.5 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.59
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300898

CATALOG NUMBER: P3A17R40W2N902765DE010 E3CB1MB_3000K

Luminous Intensity Polar Plot

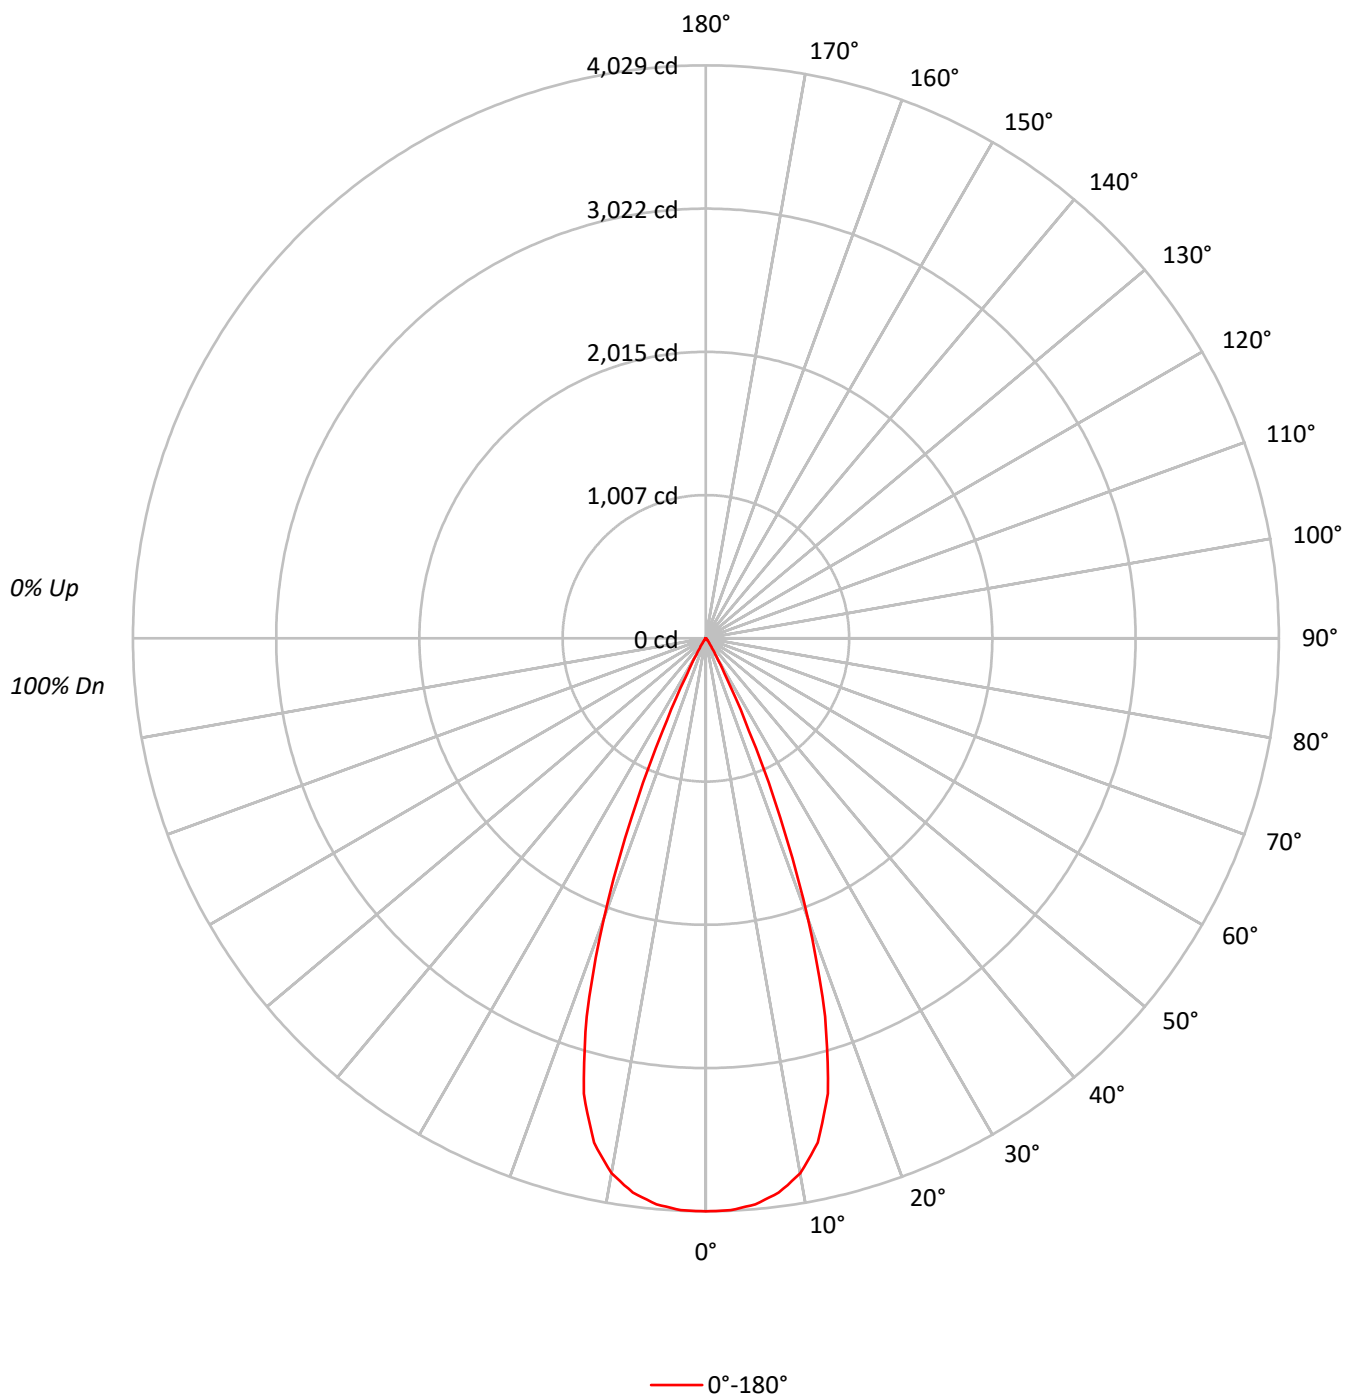

TEST NUMBER: P1300898

CATALOG NUMBER: P3A17R40W2N902765DE010 E3CB1MB_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20				20				20
RC	80				70				50				30				10				0				0				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	102	102	102	102	102	102	102	102	100
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	98	98	98	98	98	98	98	98	98	98	98	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	96	95	94	94	94	94	94	94	94	94	94	94	94	94	92
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	94	92	90	90	90	90	90	90	90	90	90	90	90	90	89
4	103	97	93	90	102	96	92	89	94	91	88	92	90	87	91	88	86	86	86	86	86	86	86	86	86	86	86	86	85
5	100	93	89	86	98	92	88	85	91	87	85	89	86	84	88	85	83	83	83	83	83	83	83	83	83	83	83	83	82
6	96	90	85	82	95	89	85	82	88	84	81	86	83	81	85	82	80	80	80	80	80	80	80	80	80	80	80	80	79
7	93	86	82	79	92	86	81	78	85	81	78	83	80	78	82	79	77	77	77	77	77	77	77	77	77	77	77	77	76
8	90	83	79	76	89	83	78	75	82	78	75	81	77	75	80	77	75	75	75	75	75	75	75	75	75	75	75	75	73
9	87	80	76	73	87	80	76	73	79	75	72	78	75	72	77	74	72	72	72	72	72	72	72	72	72	72	72	72	71
10	85	77	73	70	84	77	73	70	76	73	70	76	72	70	75	72	70	70	70	70	70	70	70	70	70	70	70	70	69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	883504
5°	879263
10°	850597
15°	752558
20°	490999
25°	173937
30°	36892
35°	12153
40°	4437
45°	1489
50°	1228
55°	1376
60°	1053
65°	1245
70°	769
75°	1017
80°	1515
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 82.5°

Luminance: 2016 cd/sqm

TEST NUMBER: P1300898

CATALOG NUMBER: P3A17R40W2N902765DE010 E3CB1MB_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	375.9	22.4
10°-20°	875.3	52.2
20°-30°	379.8	22.6
30°-40°	35.0	2.1
40°-50°	5.0	0.3
50°-60°	3.1	0.2
60°-70°	2.2	0.1
70°-80°	1.3	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1631.0	97.2
0°-40°	1666.0	99.3
0°-60°	1674.1	99.8
0°-90°	1678.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1678.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4029	
5°	3994	376
15°	3315	875
25°	719	380
35°	45	35
45°	5	5
55°	4	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1300898

CATALOG NUMBER: P3A17R40W2N902765DE010 E3CB1MB_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	4029.1
2.5°	4024.3
5°	3994.5
7.5°	3931.2
10°	3820.1
12.5°	3632.7
15°	3315.0
17.5°	2788.4
20°	2104.1
22.5°	1366.1
25°	718.9
27.5°	309.3
30°	145.7
32.5°	78.8
35°	45.4
37.5°	27.5
40°	15.5
42.5°	8.4
45°	4.8
47.5°	3.6
50°	3.6
52.5°	3.6
55°	3.6
57.5°	3.6
60°	2.4
62.5°	2.4
65°	2.4
67.5°	2.4
70°	1.2
72.5°	1.2
75°	1.2
77.5°	1.2
80°	1.2
82.5°	1.2
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)