

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300914

Luminaire Tested: P3A17R40W2N902765DE010 E3CB1MW\_6500K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1300914  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A17R40W2N902765DE010 E3CB1MW\_6500K  
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 6500K CCT AND, 90CRI ,  
E3CB1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1693.0 lumens  
Efficiency: N/A  
Efficacy: 87.3 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.59  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300914

CATALOG NUMBER: P3A17R40W2N902765DE010 E3CB1MW\_6500K

### Luminous Intensity Polar Plot

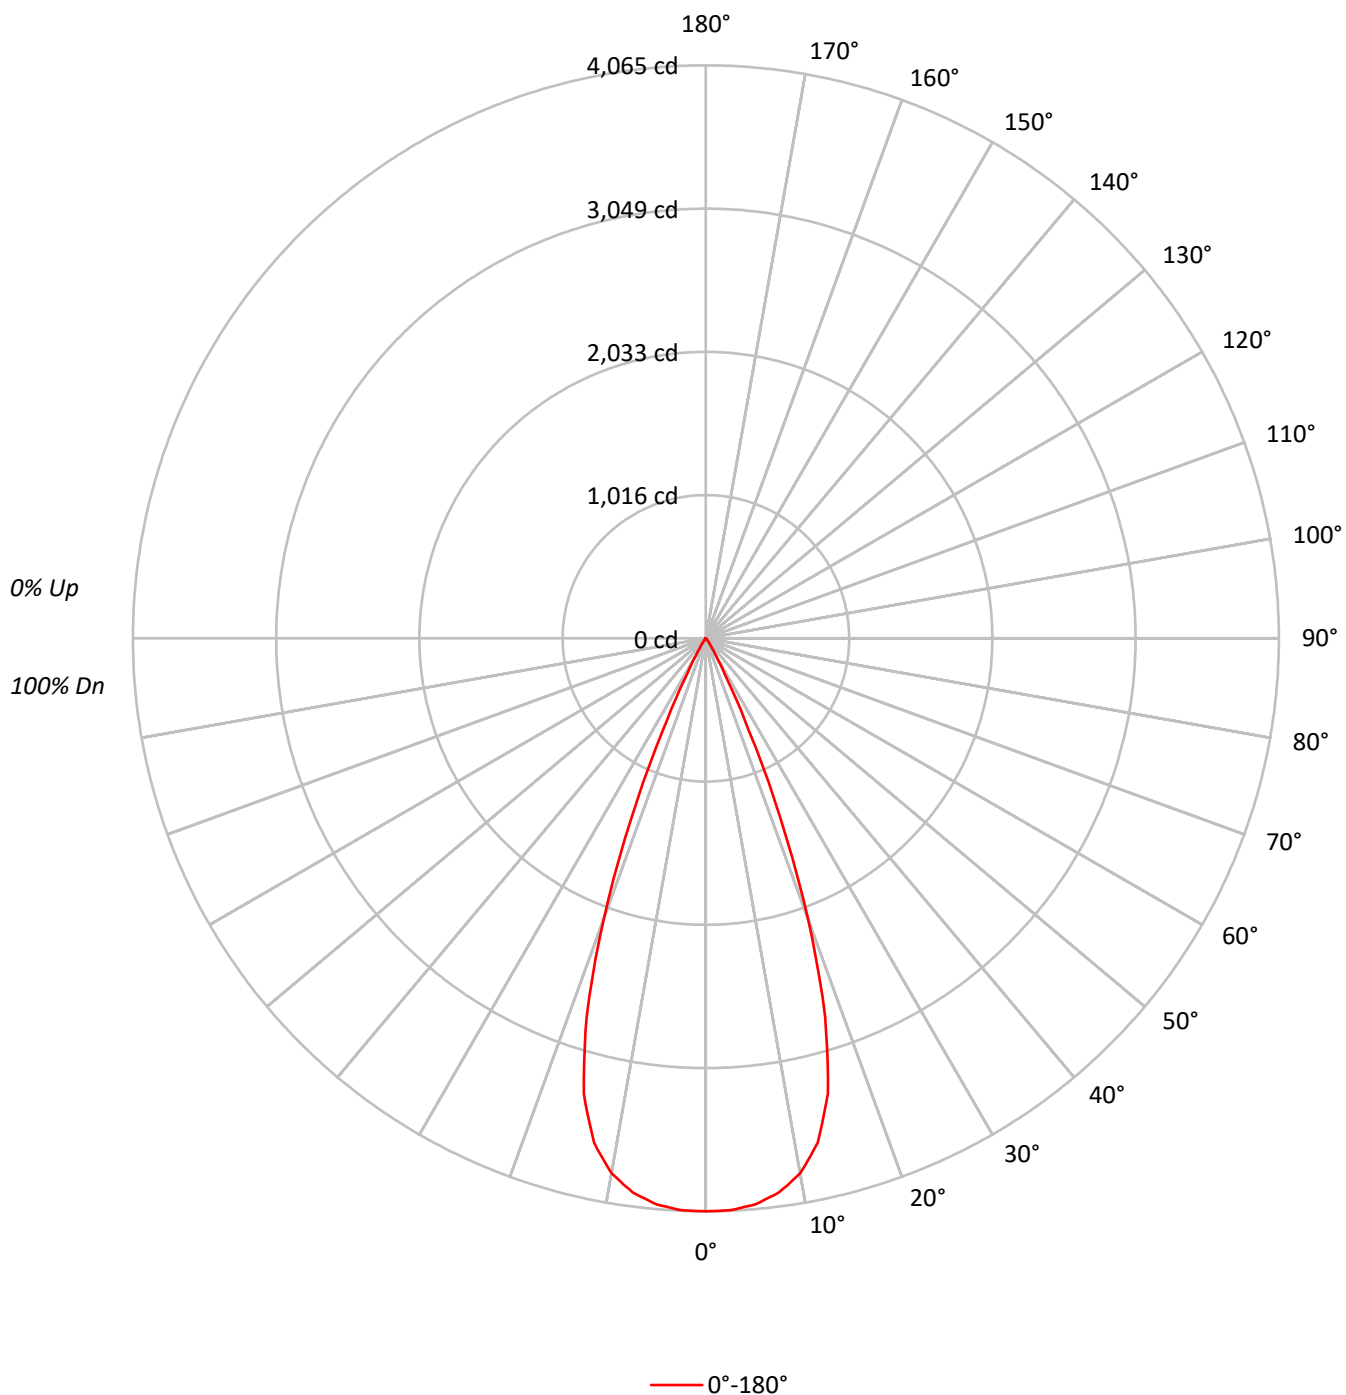

TEST NUMBER: P1300914

CATALOG NUMBER: P3A17R40W2N902765DE010 E3CB1MW\_6500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    | 20 |    |    |    | 20 |    |    |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    |    | 0  |    |    |    | 0  |    |    |    | 0  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |    |    |    |    |    |    |    |    |    |
| 1   | 115 | 112 | 110 | 109 | 112 | 110 | 109 | 107 | 106 | 105 | 104 | 103 | 102 | 101 | 99  | 98  | 98  | 96  |    |    |    |    |    |    |    |    |    |    |    |
| 2   | 111 | 107 | 104 | 101 | 109 | 105 | 102 | 100 | 102 | 100 | 98  | 99  | 97  | 96  | 96  | 95  | 94  | 92  |    |    |    |    |    |    |    |    |    |    |    |
| 3   | 107 | 102 | 98  | 95  | 105 | 100 | 97  | 94  | 98  | 95  | 93  | 96  | 93  | 91  | 94  | 92  | 90  | 89  |    |    |    |    |    |    |    |    |    |    |    |
| 4   | 103 | 97  | 93  | 90  | 102 | 96  | 92  | 89  | 94  | 91  | 88  | 92  | 90  | 87  | 91  | 88  | 86  | 85  |    |    |    |    |    |    |    |    |    |    |    |
| 5   | 100 | 93  | 89  | 86  | 98  | 92  | 88  | 85  | 91  | 87  | 85  | 89  | 86  | 84  | 88  | 85  | 83  | 82  |    |    |    |    |    |    |    |    |    |    |    |
| 6   | 96  | 90  | 85  | 82  | 95  | 89  | 85  | 82  | 88  | 84  | 81  | 86  | 83  | 81  | 85  | 82  | 80  | 79  |    |    |    |    |    |    |    |    |    |    |    |
| 7   | 93  | 86  | 82  | 79  | 92  | 86  | 81  | 78  | 85  | 81  | 78  | 83  | 80  | 78  | 82  | 79  | 77  | 76  |    |    |    |    |    |    |    |    |    |    |    |
| 8   | 90  | 83  | 79  | 76  | 89  | 83  | 78  | 75  | 82  | 78  | 75  | 81  | 77  | 75  | 80  | 77  | 75  | 73  |    |    |    |    |    |    |    |    |    |    |    |
| 9   | 87  | 80  | 76  | 73  | 87  | 80  | 76  | 73  | 79  | 75  | 72  | 78  | 75  | 72  | 77  | 74  | 72  | 71  |    |    |    |    |    |    |    |    |    |    |    |
| 10  | 85  | 77  | 73  | 70  | 84  | 77  | 73  | 70  | 76  | 73  | 70  | 76  | 72  | 70  | 75  | 72  | 70  | 69  |    |    |    |    |    |    |    |    |    |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 891398 |
| 5°  | 887121 |
| 10° | 858212 |
| 15° | 759278 |
| 20° | 495386 |
| 25° | 175486 |
| 30° | 37221  |
| 35° | 12260  |
| 40° | 4494   |
| 45° | 1489   |
| 50° | 1228   |
| 55° | 1376   |
| 60° | 1053   |
| 65° | 1245   |
| 70° | 769    |
| 75° | 1017   |
| 80° | 1515   |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 82.5°

Luminance: 2016 cd/sqm

TEST NUMBER: P1300914

CATALOG NUMBER: P3A17R40W2N902765DE010 E3CB1MW\_6500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 379.2  | 22.4      |
| 10°-20°   | 883.1  | 52.2      |
| 20°-30°   | 383.2  | 22.6      |
| 30°-40°   | 35.3   | 2.1       |
| 40°-50°   | 5.0    | 0.3       |
| 50°-60°   | 3.1    | 0.2       |
| 60°-70°   | 2.2    | 0.1       |
| 70°-80°   | 1.3    | 0.1       |
| 80°-90°   | 0.5    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 1645.5 | 97.2      |
| 0°-40°    | 1680.9 | 99.3      |
| 0°-60°    | 1689.0 | 99.8      |
| 0°-90°    | 1693.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1693.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 4065 |      |
| 5°  | 4030 | 379  |
| 15° | 3345 | 883  |
| 25° | 725  | 383  |
| 35° | 46   | 35   |
| 45° | 5    | 5    |
| 55° | 4    | 3    |
| 65° | 2    | 2    |
| 75° | 1    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1300914

CATALOG NUMBER: P3A17R40W2N902765DE010 E3CB1MW\_6500K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 4065.1 |
| 2.5°  | 4060.3 |
| 5°    | 4030.2 |
| 7.5°  | 3966.3 |
| 10°   | 3854.3 |
| 12.5° | 3665.1 |
| 15°   | 3344.6 |
| 17.5° | 2813.3 |
| 20°   | 2122.9 |
| 22.5° | 1378.3 |
| 25°   | 725.3  |
| 27.5° | 312.1  |
| 30°   | 147.0  |
| 32.5° | 79.5   |
| 35°   | 45.8   |
| 37.5° | 27.7   |
| 40°   | 15.7   |
| 42.5° | 8.4    |
| 45°   | 4.8    |
| 47.5° | 3.6    |
| 50°   | 3.6    |
| 52.5° | 3.6    |
| 55°   | 3.6    |
| 57.5° | 3.6    |
| 60°   | 2.4    |
| 62.5° | 2.4    |
| 65°   | 2.4    |
| 67.5° | 2.4    |
| 70°   | 1.2    |
| 72.5° | 1.2    |
| 75°   | 1.2    |
| 77.5° | 1.2    |
| 80°   | 1.2    |
| 82.5° | 1.2    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)