

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300993

Luminaire Tested: P3A17R40W2N902765DE010 E3DL1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1300993
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R40W2N902765DE010 E3DL1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 2700K CCT AND, 90CRI ,
E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1261.0 lumens
Efficiency: N/A
Efficacy: 65.0 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1300993

CATALOG NUMBER: P3A17R40W2N902765DE010 E3DL1WMH_2700K

Luminous Intensity Polar Plot

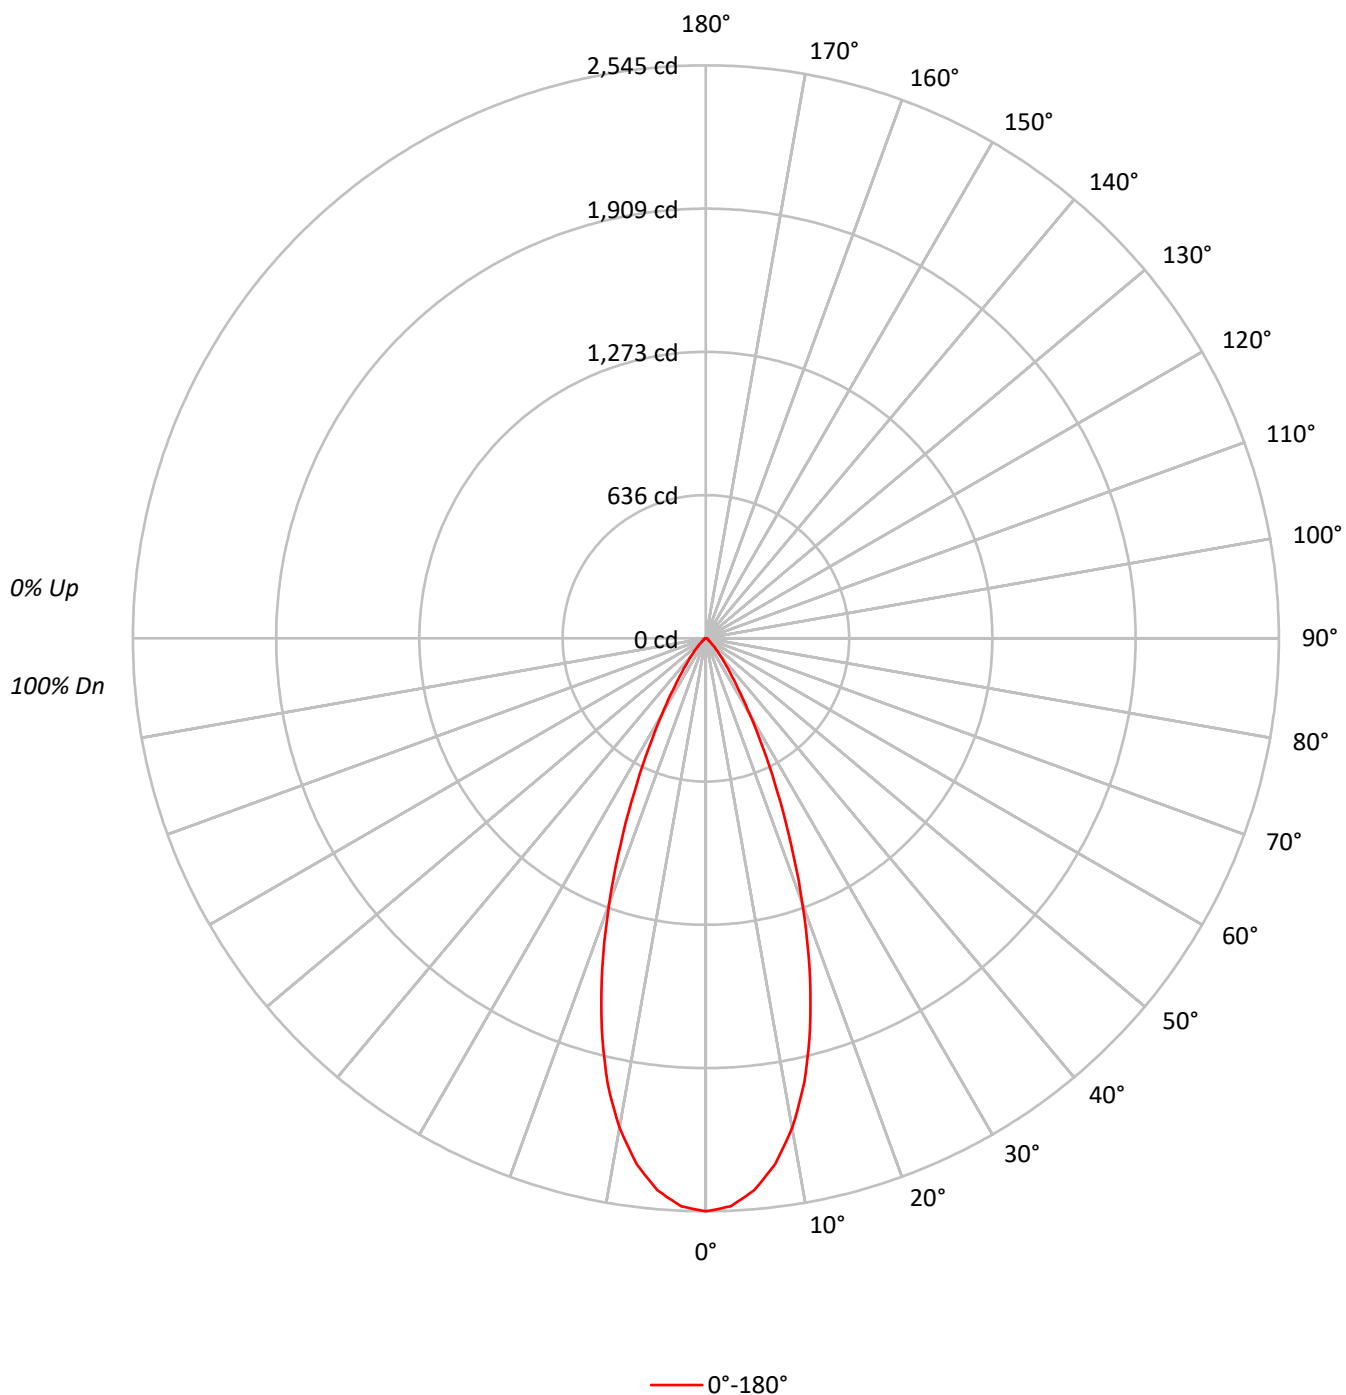



TEST NUMBER: P1300993

CATALOG NUMBER: P3A17R40W2N902765DE010 E3DL1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	114	111	109	107		112	109	107	105		105	104	102		102	100	99		98	97	96		94			
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	92	91		89			
3	104	99	94	91		102	97	93	90		95	91	88		92	89	87		90	88	86		84			
4	100	93	88	85		98	92	88	84		90	86	83		88	85	82		86	84	81		80			
5	96	88	83	79		94	88	83	79		86	82	78		84	81	78		83	80	77		76			
6	92	84	79	75		91	83	78	75		82	78	74		81	77	74		79	76	73		72			
7	88	80	75	71		87	79	74	71		78	74	71		77	73	70		76	73	70		69			
8	85	76	71	68		84	76	71	67		75	70	67		74	70	67		73	69	67		65			
9	82	73	68	64		81	73	68	64		72	67	64		71	67	64		70	66	64		63			
10	78	70	65	62		78	70	65	61		69	64	61		68	64	61		67	64	61		60			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	557982
5°	541777
10°	491641
15°	406154
20°	292975
25°	181220
30°	98116
35°	50701
40°	27566
45°	15443
50°	7744
55°	5811
60°	5219
65°	5033
70°	4873
75°	4575
80°	4041
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15443 cd/sqm

TEST NUMBER: P1300993

CATALOG NUMBER: P3A17R40W2N902765DE010 E3DL1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	226.9	18.0
10°-20°	487.2	38.6
20°-30°	347.7	27.6
30°-40°	128.0	10.1
40°-50°	40.3	3.2
50°-60°	14.0	1.1
60°-70°	9.6	0.8
70°-80°	5.7	0.5
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1061.7	84.2
0°-40°	1189.7	94.3
0°-60°	1244.0	98.7
0°-90°	1261.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1261.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2545	
5°	2461	227
15°	1789	487
25°	749	348
35°	189	128
45°	50	40
55°	15	14
65°	10	10
75°	5	6
85°	1	2
90°	0	

TEST NUMBER: P1300993

CATALOG NUMBER: P3A17R40W2N902765DE010 E3DL1WMH_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2544.6
2.5°	2525.1
5°	2461.3
7.5°	2355.2
10°	2208.0
12.5°	2020.8
15°	1789.1
17.5°	1529.4
20°	1255.5
22.5°	986.0
25°	749.0
27.5°	549.8
30°	387.5
32.5°	271.7
35°	189.4
37.5°	134.2
40°	96.3
42.5°	69.3
45°	49.8
47.5°	33.6
50°	22.7
52.5°	16.2
55°	15.2
57.5°	14.1
60°	11.9
62.5°	10.8
65°	9.7
67.5°	8.7
70°	7.6
72.5°	6.5
75°	5.4
77.5°	4.3
80°	3.2
82.5°	2.2
85°	1.1
87.5°	1.1
90°	0.0

(END OF REPORT)