

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301002

Luminaire Tested: P3A17R40W2N902765DE010 E3DLD1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301002
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R40W2N902765DE010 E3DLD1GPH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 4000K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 531.0 lumens
Efficiency: N/A
Efficacy: 27.4 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301002

CATALOG NUMBER: P3A17R40W2N902765DE010 E3DLD1GPH_4000K

Luminous Intensity Polar Plot

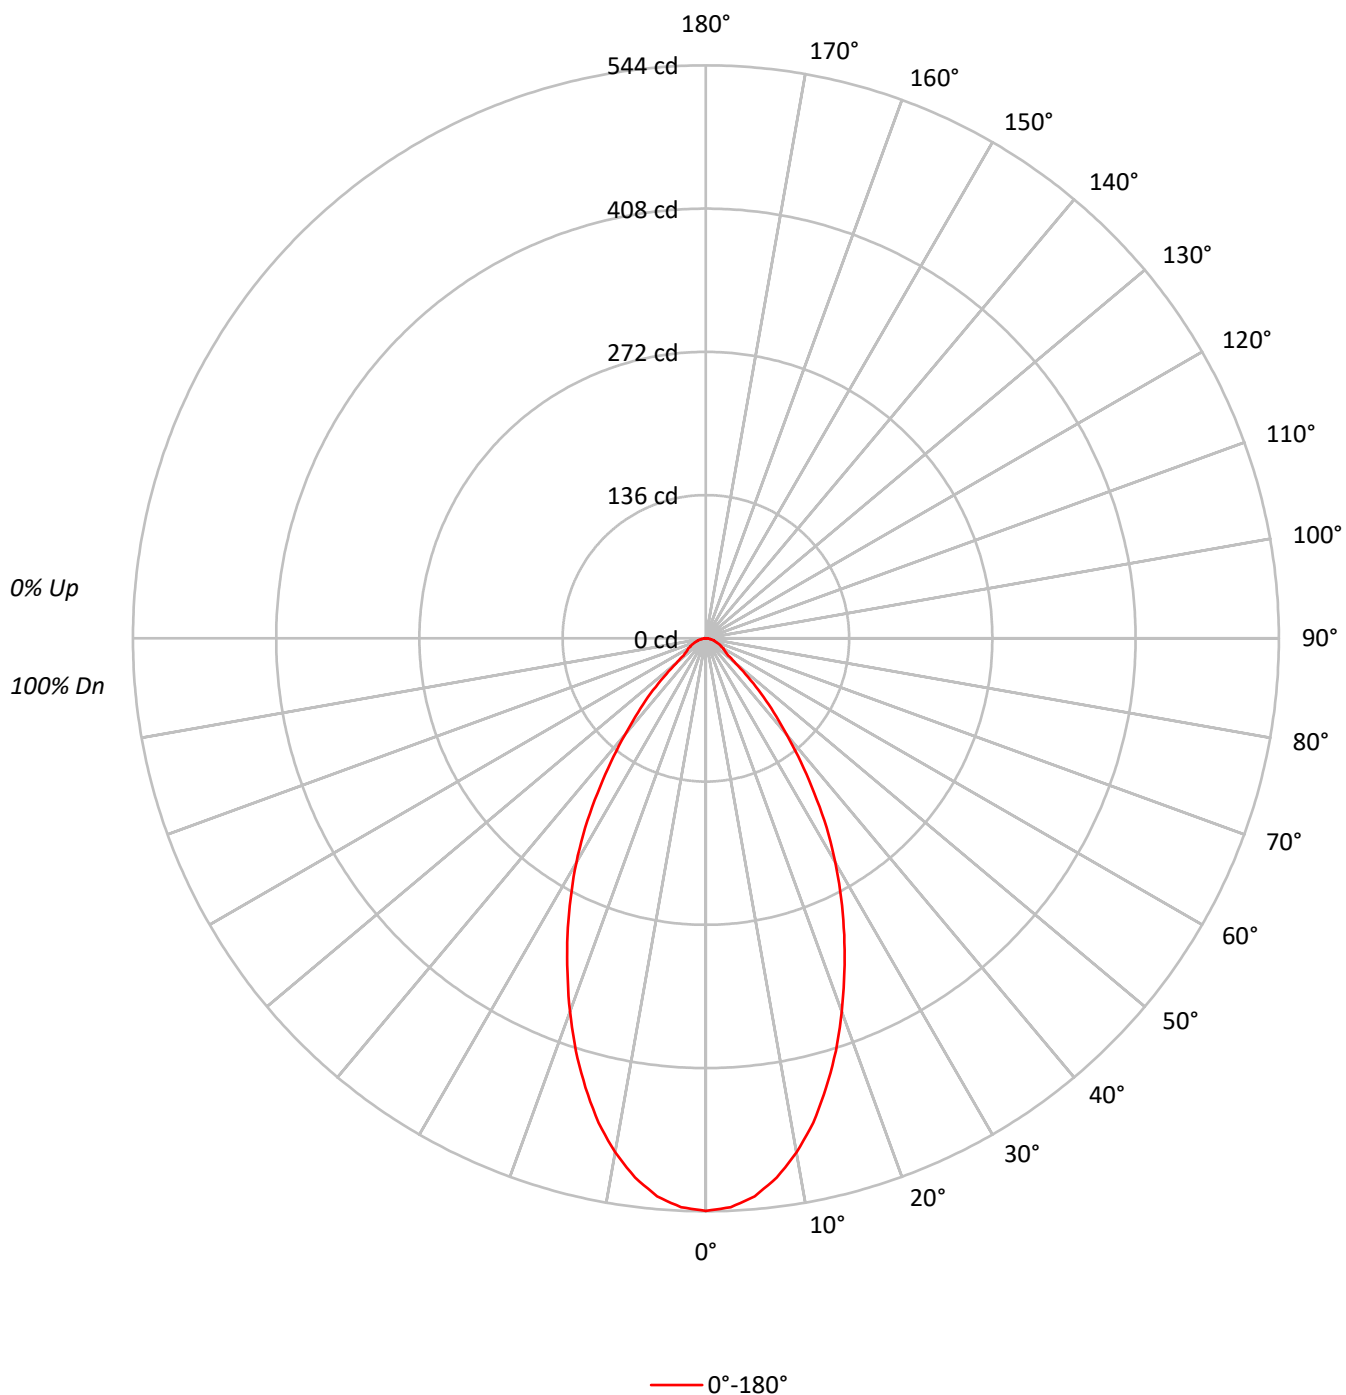

TEST NUMBER: P1301002

CATALOG NUMBER: P3A17R40W2N902765DE010 E3DLD1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	119201
5°	117037
10°	110330
15°	100205
20°	88021
25°	75174
30°	62288
35°	48024
40°	34178
45°	23041
50°	12554
55°	8869
60°	8333
65°	7731
70°	6860
75°	6524
80°	5304
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23041 cd/sqm

TEST NUMBER: P1301002

CATALOG NUMBER: P3A17R40W2N902765DE010 E3DLD1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.6	9.3
10°-20°	123.0	23.2
20°-30°	142.1	26.8
30°-40°	112.0	21.1
40°-50°	57.5	10.8
50°-60°	22.0	4.1
60°-70°	14.6	2.7
70°-80°	7.9	1.5
80°-90°	2.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	314.7	59.3
0°-40°	426.7	80.4
0°-60°	506.2	95.3
0°-90°	531.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	531.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	544	
5°	532	50
15°	441	123
25°	311	142
35°	179	112
45°	74	58
55°	23	22
65°	15	15
75°	8	8
85°	2	2
90°	0	

TEST NUMBER: P1301002

CATALOG NUMBER: P3A17R40W2N902765DE010 E3DLD1GPH_4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	543.6
2.5°	540.6
5°	531.7
7.5°	516.3
10°	495.5
12.5°	471.1
15°	441.4
17.5°	410.5
20°	377.2
22.5°	343.4
25°	310.7
27.5°	278.0
30°	246.0
32.5°	213.3
35°	179.4
37.5°	147.9
40°	119.4
42.5°	95.1
45°	74.3
47.5°	54.1
50°	36.8
52.5°	26.7
55°	23.2
57.5°	20.8
60°	19.0
62.5°	16.6
65°	14.9
67.5°	12.5
70°	10.7
72.5°	8.9
75°	7.7
77.5°	5.9
80°	4.2
82.5°	3.6
85°	1.8
87.5°	1.2
90°	0.0

(END OF REPORT)