

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301251

Luminaire Tested: P3A17R45W2N902765DE010 E3DL1LI_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301251
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-27)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R45W2N902765DE010 E3DL1LI_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 3000K CCT AND, 90CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1335.0 lumens
Efficiency: N/A
Efficacy: 68.8 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.69
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301251

CATALOG NUMBER: P3A17R45W2N902765DE010 E3DL1LI_3000K

Luminous Intensity Polar Plot

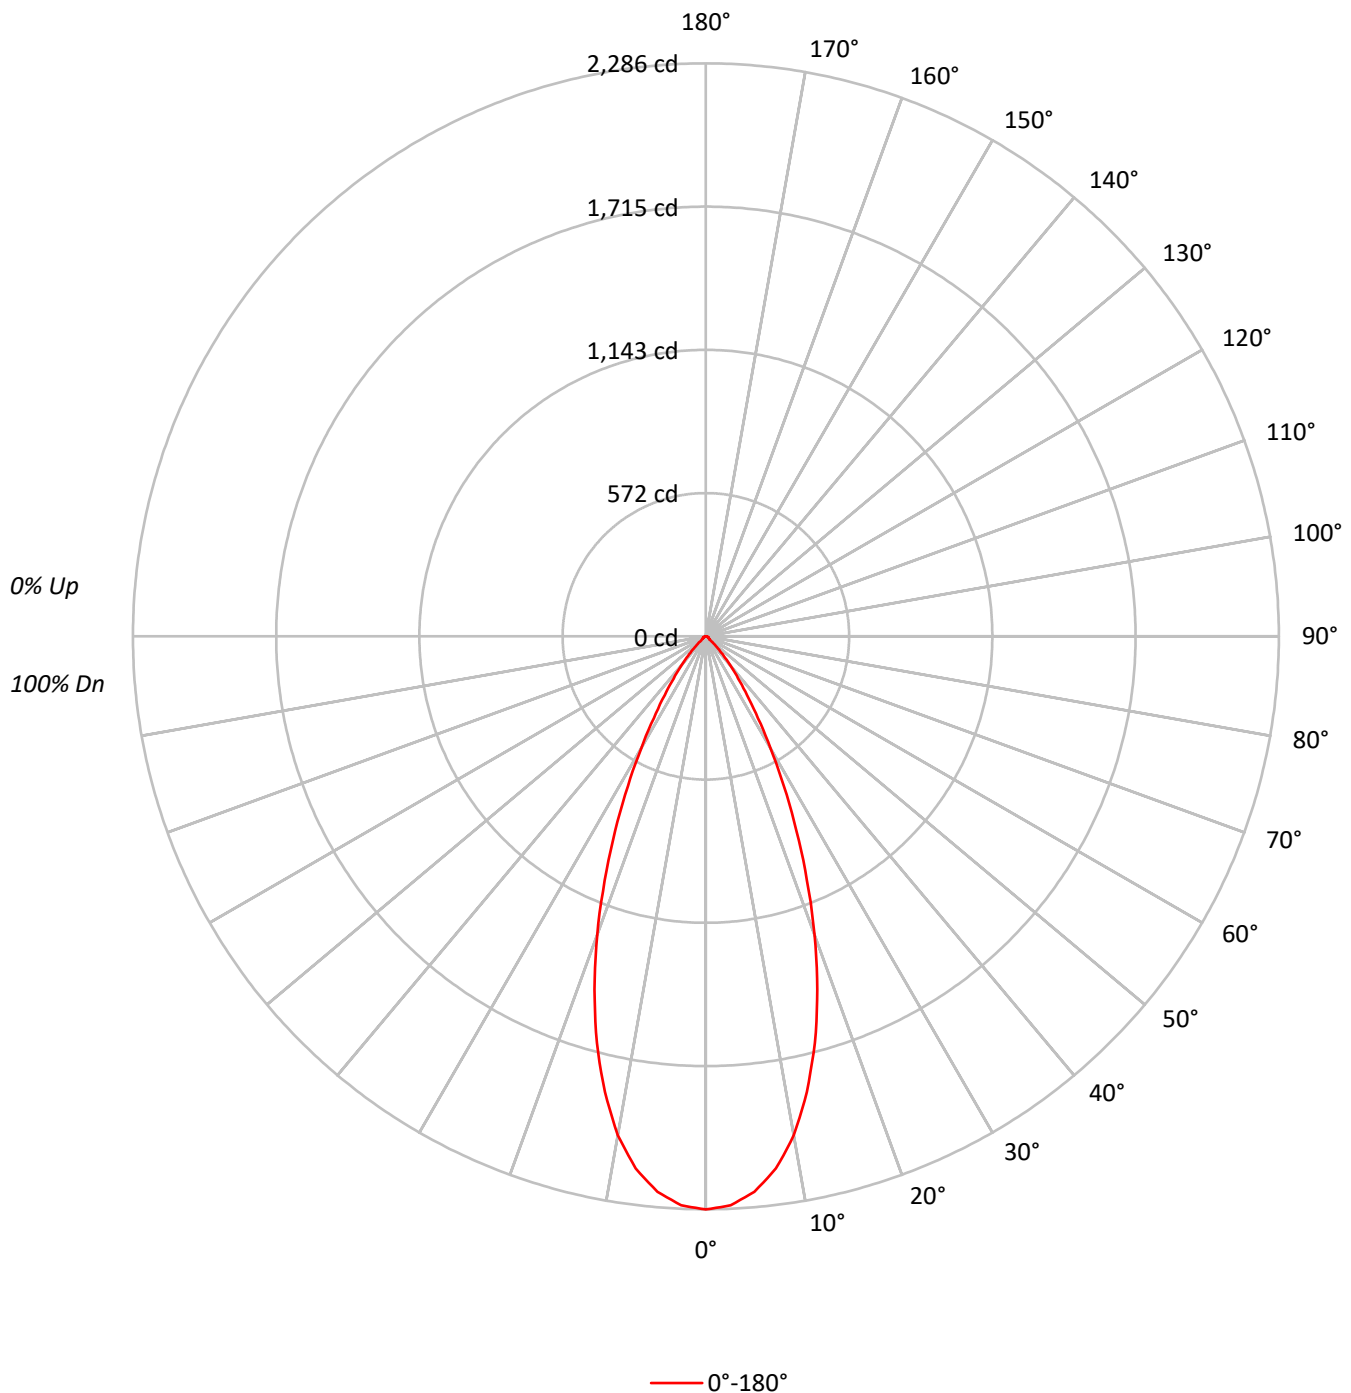

TEST NUMBER: P1301251

CATALOG NUMBER: P3A17R45W2N902765DE010 E3DL1LI_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96		94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90		88
3	104	98	93	89	102	96	92	88	94	90	87		91	88	86		89	86	84		83
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85	82	79		78
5	94	87	81	77	93	86	81	77	84	80	76		82	79	76		81	78	75		74
6	90	82	76	73	89	81	76	72	80	75	72		78	74	71		77	74	71		70
7	86	78	72	68	85	77	72	68	76	71	68		75	71	67		74	70	67		66
8	83	74	68	65	82	73	68	64	72	68	64		71	67	64		70	67	64		62
9	79	70	65	61	78	70	65	61	69	64	61		68	64	61		67	63	61		59
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	501341
5°	489587
10°	450047
15°	381342
20°	295869
25°	206818
30°	130299
35°	76694
40°	43396
45°	21118
50°	7335
55°	5926
60°	5745
65°	5552
70°	5386
75°	5083
80°	4546
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 21118 cd/sqm

TEST NUMBER: P1301251

CATALOG NUMBER: P3A17R45W2N902765DE010 E3DL1LI_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	205.9	15.4
10°-20°	461.3	34.6
20°-30°	391.7	29.3
30°-40°	186.8	14.0
40°-50°	56.3	4.2
50°-60°	14.2	1.1
60°-70°	10.6	0.8
70°-80°	6.3	0.5
80°-90°	1.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1058.9	79.3
0°-40°	1245.7	93.3
0°-60°	1316.3	98.6
0°-90°	1335.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1335.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2286	
5°	2224	206
15°	1680	461
25°	855	392
35°	286	187
45°	68	56
55°	16	14
65°	11	11
75°	6	6
85°	1	2
90°	0	

TEST NUMBER: P1301251

CATALOG NUMBER: P3A17R45W2N902765DE010 E3DL1LI_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2286.3
2.5°	2272.0
5°	2224.2
7.5°	2141.8
10°	2021.2
12.5°	1861.3
15°	1679.8
17.5°	1478.0
20°	1267.9
22.5°	1054.2
25°	854.8
27.5°	673.4
30°	514.6
32.5°	386.8
35°	286.5
37.5°	211.3
40°	151.6
42.5°	105.1
45°	68.1
47.5°	38.2
50°	21.5
52.5°	16.7
55°	15.5
57.5°	14.3
60°	13.1
62.5°	11.9
65°	10.7
67.5°	9.6
70°	8.4
72.5°	7.2
75°	6.0
77.5°	4.8
80°	3.6
82.5°	2.4
85°	1.2
87.5°	1.2
90°	0.0

(END OF REPORT)