

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1301476

Luminaire Tested: P3A17R50W2N902750DE010 E3DLP1MW_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1301476
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A17R50W2N902750DE010 E3DLP1MW_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 2700K CCT AND, 90CRI ,
E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 799.0 lumens
Efficiency: N/A
Efficacy: 41.2 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1301476

CATALOG NUMBER: P3A17R50W2N902750DE010 E3DLP1MW_2700K

Luminous Intensity Polar Plot

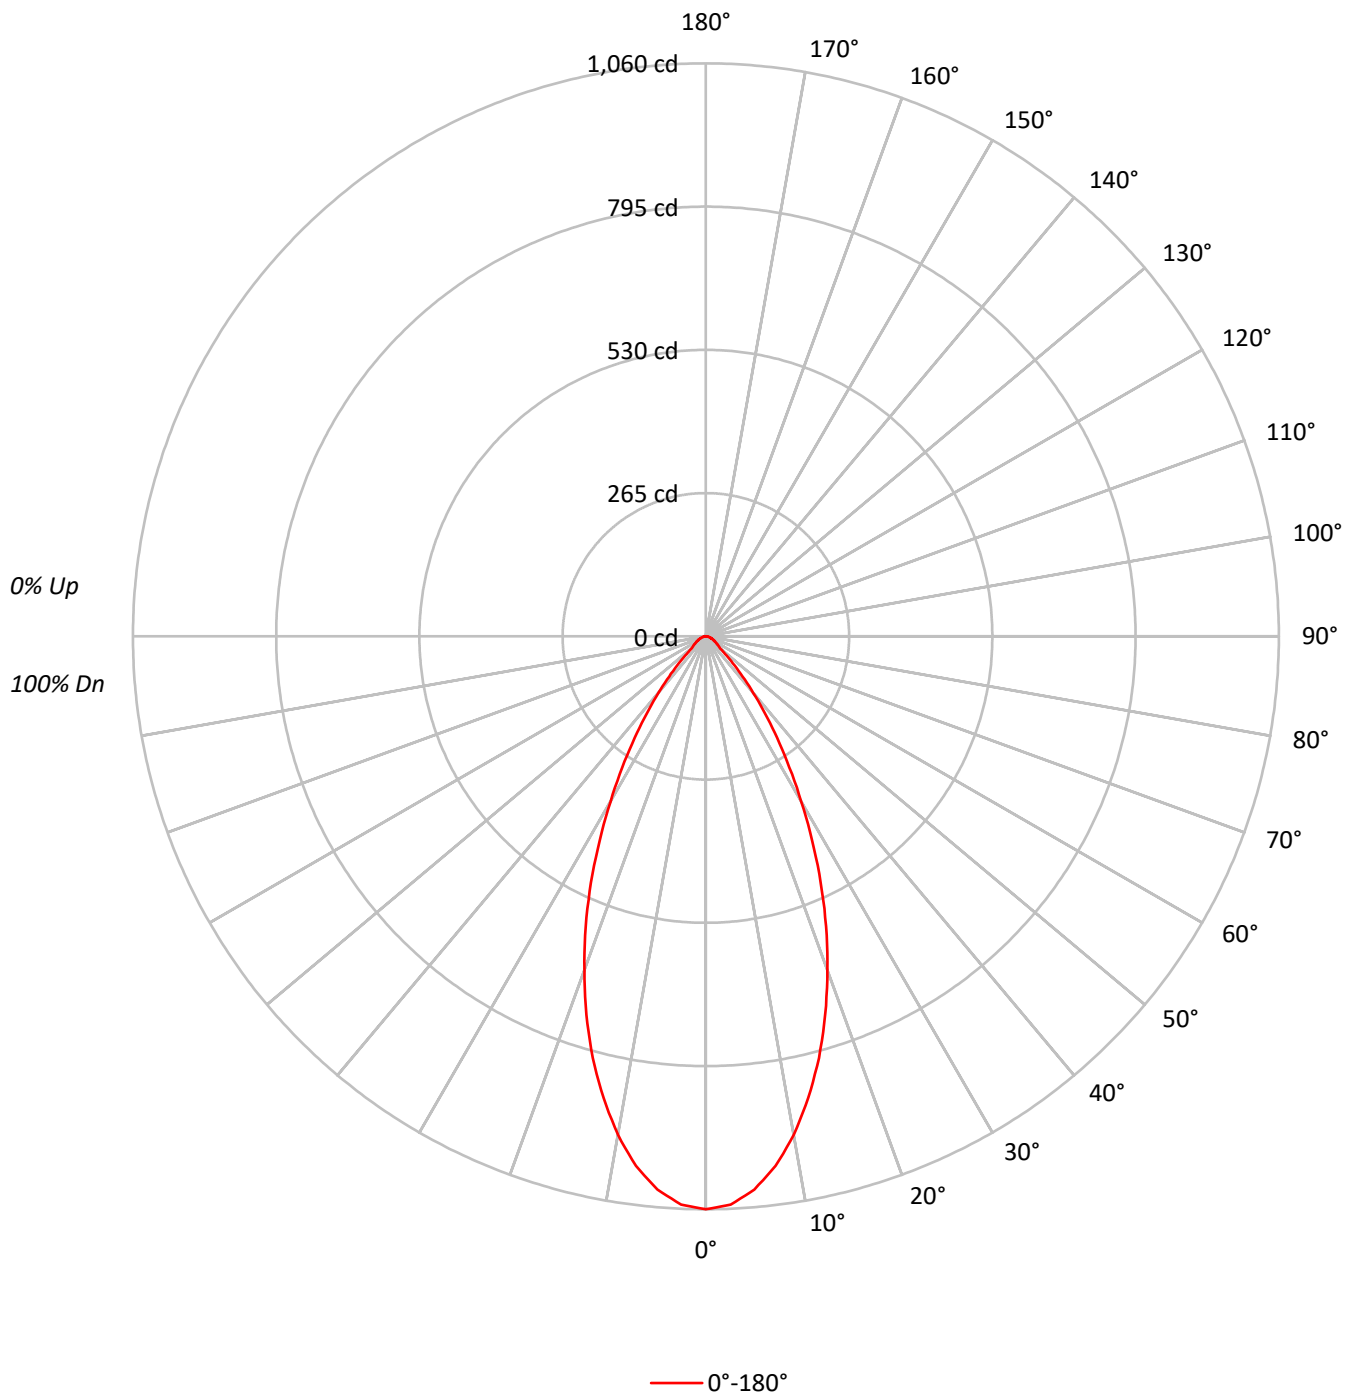

TEST NUMBER: P1301476

CATALOG NUMBER: P3A17R50W2N902750DE010 E3DLP1MW_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	95	89	85	99	93	88	85	91	87	83		88	85	82		86
4	96	88	82	78	94	87	82	78	85	80	77		83	79	76		81
5	91	83	76	72	90	82	76	72	80	75	71		78	74	70		77
6	87	77	71	67	85	77	71	67	75	70	66		74	69	66		72
7	82	73	67	62	81	72	66	62	71	66	62		70	65	61		68
8	78	69	63	58	77	68	62	58	67	62	58		66	61	58		65
9	75	65	59	55	74	64	59	55	63	58	55		63	58	54		62
10	71	61	56	52	70	61	55	52	60	55	51		59	55	51		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	232394
5°	226128
10°	208524
15°	183384
20°	153430
25°	121652
30°	89254
35°	61382
40°	39016
45°	21801
50°	11803
55°	9940
60°	8552
65°	7835
70°	6924
75°	6439
80°	5430
85°	5535

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 21801 cd/sqm

TEST NUMBER: P1301476

CATALOG NUMBER: P3A17R50W2N902750DE010 E3DLP1MW_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.2	11.9
10°-20°	223.7	28.0
20°-30°	228.8	28.6
30°-40°	145.1	18.2
40°-50°	57.8	7.2
50°-60°	23.4	2.9
60°-70°	15.0	1.9
70°-80°	7.7	1.0
80°-90°	2.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	547.7	68.5
0°-40°	692.8	86.7
0°-60°	774.0	96.9
0°-90°	799.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	799.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1060	
5°	1027	95
15°	808	224
25°	503	229
35°	229	145
45°	70	58
55°	26	23
65°	15	15
75°	8	8
85°	2	2
90°	0	

TEST NUMBER: P1301476

CATALOG NUMBER: P3A17R50W2N902750DE010 E3DLP1MW_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1059.8
2.5°	1052.2
5°	1027.3
7.5°	988.4
10°	936.5
12.5°	874.8
15°	807.8
17.5°	734.3
20°	657.5
22.5°	580.7
25°	502.8
27.5°	425.0
30°	352.5
32.5°	287.7
35°	229.3
37.5°	179.5
40°	136.3
42.5°	100.6
45°	70.3
47.5°	47.6
50°	34.6
52.5°	29.2
55°	26.0
57.5°	22.7
60°	19.5
62.5°	17.3
65°	15.1
67.5°	13.0
70°	10.8
72.5°	8.7
75°	7.6
77.5°	5.4
80°	4.3
82.5°	3.2
85°	2.2
87.5°	1.1
90°	0.0

(END OF REPORT)