

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287828

Luminaire Tested: P3A05R15W2N902750DE010 E3DLD1WMH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287828
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R15W2N902750DE010 E3DLD1WMH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 3000K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 312.0 lumens
Efficiency: N/A
Efficacy: 52.9 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287828

CATALOG NUMBER: P3A05R15W2N902750DE010 E3DLD1WMH_3000K

Luminous Intensity Polar Plot

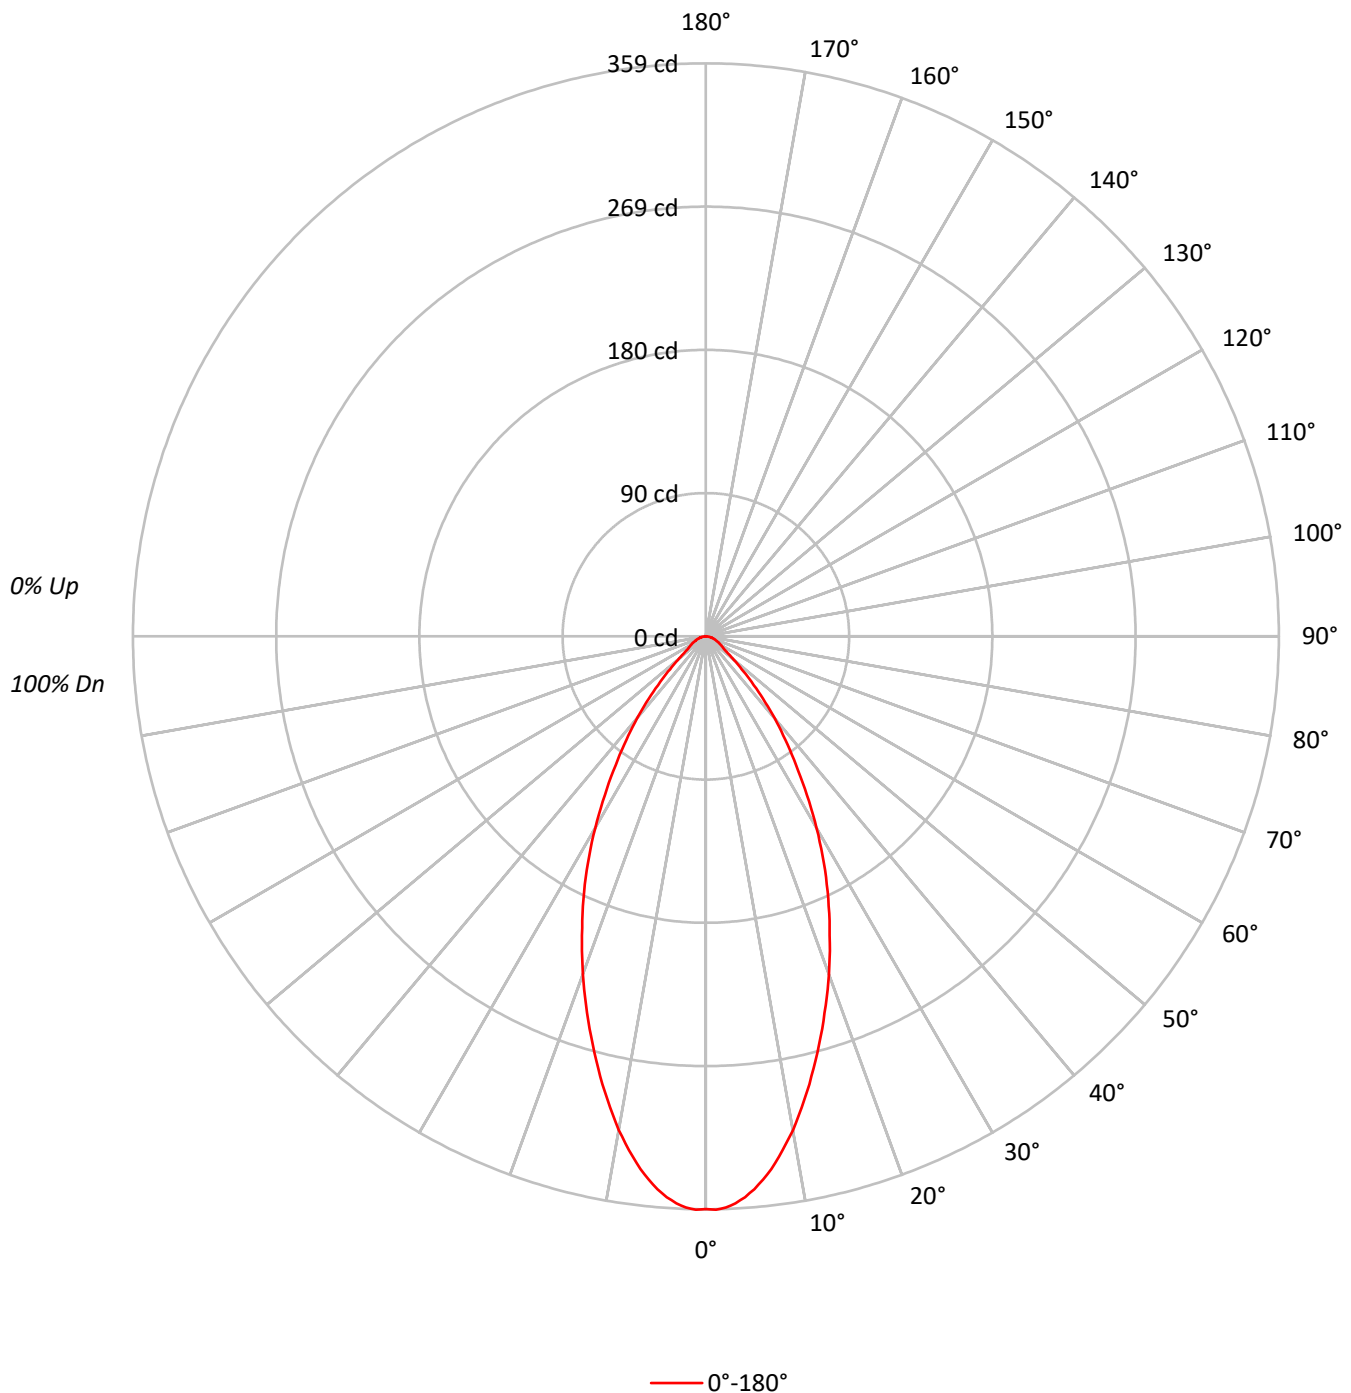

TEST NUMBER: P1287828

CATALOG NUMBER: P3A05R15W2N902750DE010 E3DLD1WMH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91		
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83		
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76		
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70		
5	89	80	73	68	87	79	73	68	77	72	67	75	70	67	74	69	66	65		
6	84	74	68	63	83	73	67	63	72	66	62	70	66	62	69	65	61	60		
7	80	69	63	58	78	69	63	58	67	62	58	66	61	57	65	61	57	56		
8	76	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	52		
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	49		
10	68	58	52	48	67	57	51	47	57	51	47	56	51	47	55	50	47	46		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	78700
5°	76557
10°	69961
15°	61294
20°	52575
25°	43890
30°	35119
35°	26341
40°	19122
45°	12497
50°	7812
55°	5276
60°	4693
65°	4307
70°	4039
75°	3643
80°	3536
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12497 cd/sqm

TEST NUMBER: P1287828

CATALOG NUMBER: P3A05R15W2N902750DE010 E3DLD1WMH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	32.1	10.3
10°-20°	75.2	24.1
20°-30°	82.9	26.6
30°-40°	62.1	19.9
40°-50°	32.2	10.3
50°-60°	13.3	4.3
60°-70°	8.3	2.6
70°-80°	4.6	1.5
80°-90°	1.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	190.2	61.0
0°-40°	252.2	80.8
0°-60°	297.8	95.4
0°-90°	312.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	312.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	359	
5°	348	32
15°	270	75
25°	181	83
35°	98	62
45°	40	32
55°	14	13
65°	8	8
75°	4	5
85°	1	1
90°	0	

TEST NUMBER: P1287828

CATALOG NUMBER: P3A05R15W2N902750DE010 E3DLD1WMH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	358.9
1°	359.3
2°	358.1
3°	355.7
4°	352.2
5°	347.8
6°	342.3
7°	336.4
8°	329.2
9°	321.7
10°	314.2
12.5°	292.5
15°	270.0
17.5°	247.4
20°	225.3
22.5°	202.8
25°	181.4
27.5°	160.1
30°	138.7
32.5°	117.8
35°	98.4
37.5°	81.8
40°	66.8
42.5°	53.0
45°	40.3
47.5°	30.4
50°	22.9
52.5°	17.0
55°	13.8
57.5°	12.3
60°	10.7
62.5°	9.5
65°	8.3
67.5°	7.1
70°	6.3
72.5°	5.1
75°	4.3
77.5°	3.6
80°	2.8
82.5°	2.0
85°	1.2
87.5°	0.4
90°	0.0

(END OF REPORT)