

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287945

Luminaire Tested: P3A05R15W2N902765DE010 E3DL1GPH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287945
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R15W2N902765DE010 E3DL1GPH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 3500K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 204.1 lumens
Efficiency: N/A
Efficacy: 34.6 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287945

CATALOG NUMBER: P3A05R15W2N902765DE010 E3DL1GPH_3500K

Luminous Intensity Polar Plot

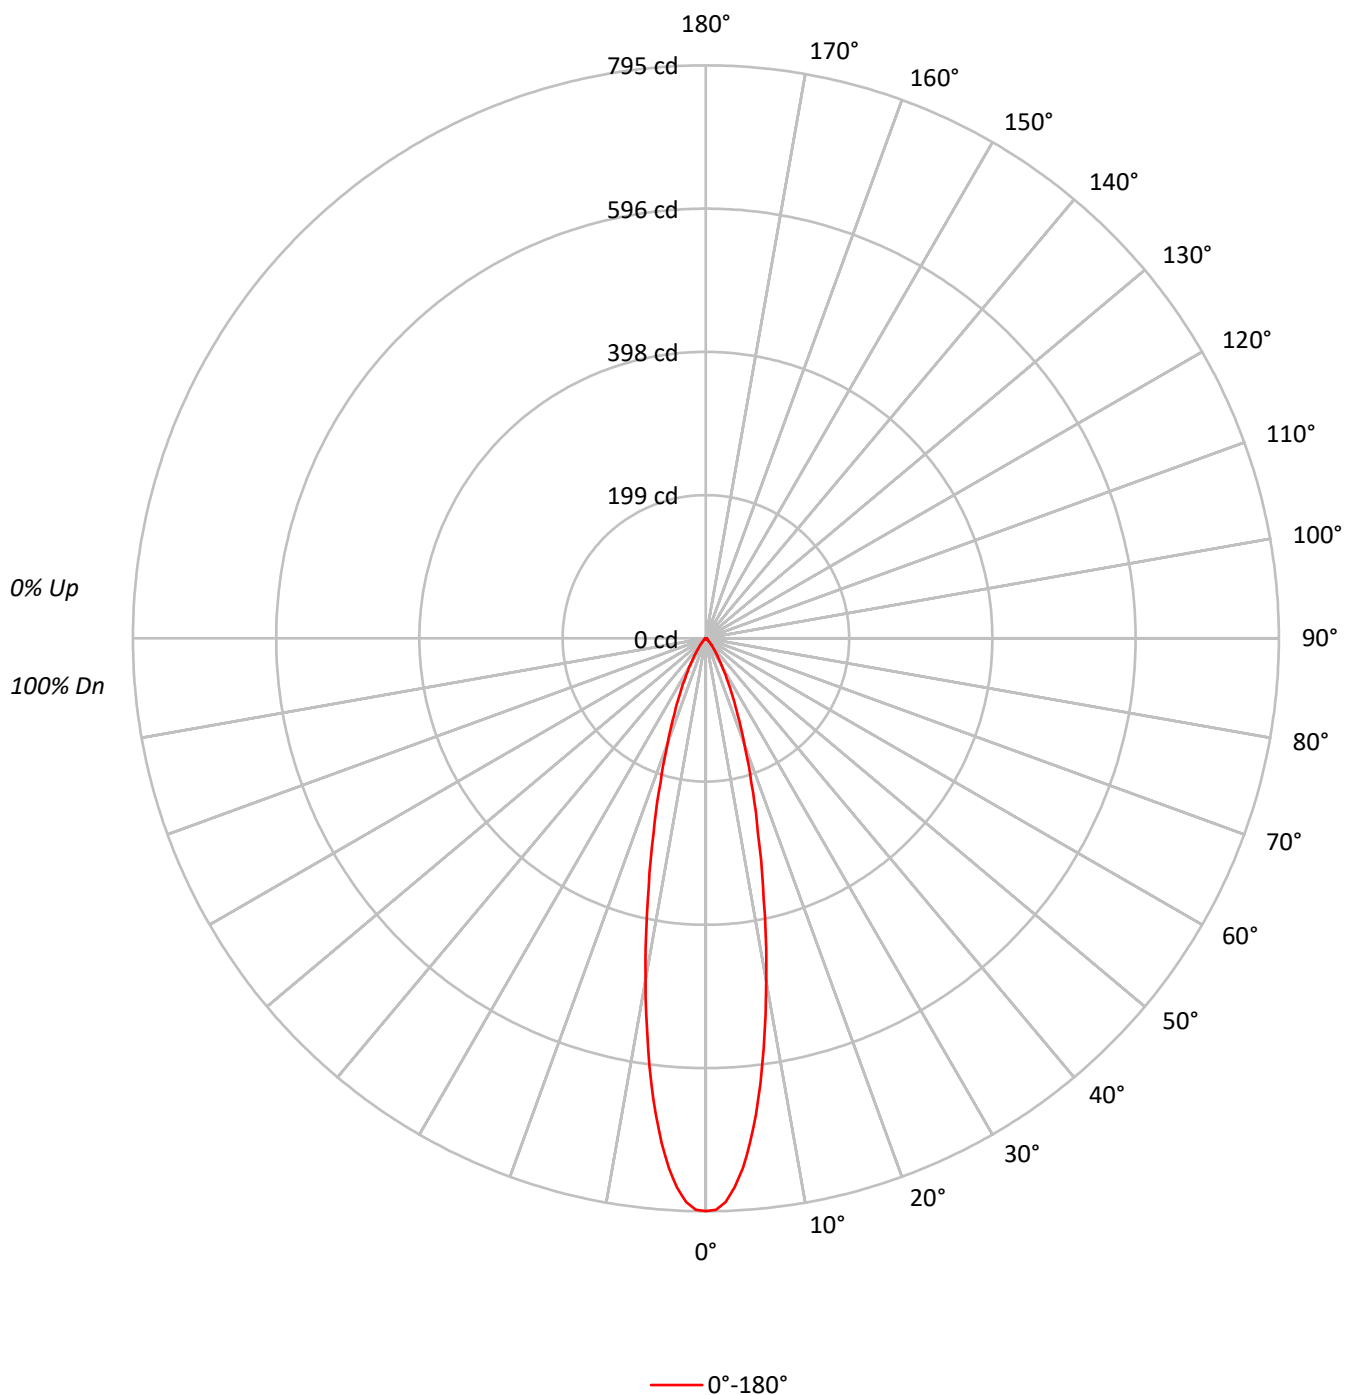



TEST NUMBER: P1287945

CATALOG NUMBER: P3A05R15W2N902765DE010 E3DL1GPH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97		95			
2	110	106	103	100		108	104	101	99		101	99	97		98	96	95		96	94	93		91			
3	106	101	97	93		104	99	96	93		97	94	91		94	92	90		92	90	88		87			
4	102	96	91	88		100	95	91	88		93	89	87		91	88	86		89	87	85		83			
5	98	92	87	84		97	91	87	83		89	85	83		88	84	82		86	83	81		80			
6	95	88	83	80		94	87	83	80		86	82	79		85	81	79		83	80	78		77			
7	92	85	80	77		91	84	80	76		83	79	76		82	78	76		81	78	75		74			
8	89	81	77	74		88	81	77	73		80	76	73		79	75	73		78	75	73		71			
9	86	79	74	71		85	78	74	71		77	73	71		77	73	70		76	73	70		69			
10	83	76	71	68		83	76	71	68		75	71	68		74	71	68		74	70	68		67			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	174262
5°	154699
10°	107435
15°	63519
20°	36193
25°	20687
30°	11445
35°	6103
40°	3378
45°	1830
50°	1126
55°	918
60°	789
65°	726
70°	641
75°	678
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1830 cd/sqm

TEST NUMBER: P1287945

CATALOG NUMBER: P3A05R15W2N902765DE010 E3DL1GPH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.8	29.3
10°-20°	78.9	38.6
20°-30°	40.6	19.9
30°-40°	15.2	7.5
40°-50°	5.0	2.4
50°-60°	2.2	1.1
60°-70°	1.4	0.7
70°-80°	0.8	0.4
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	179.2	87.8
0°-40°	194.5	95.3
0°-60°	201.7	98.8
0°-90°	204.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	204.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	795	
5°	703	60
15°	280	79
25°	86	41
35°	23	15
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1287945

CATALOG NUMBER: P3A05R15W2N902765DE010 E3DL1GPH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	794.7
1°	793.2
2°	782.7
3°	762.9
4°	736.8
5°	702.8
6°	664.2
7°	622.0
8°	575.0
9°	528.6
10°	482.5
12.5°	371.2
15°	279.8
17.5°	209.5
20°	155.1
22.5°	115.8
25°	85.5
27.5°	62.3
30°	45.2
32.5°	32.0
35°	22.8
37.5°	16.3
40°	11.8
42.5°	8.5
45°	5.9
47.5°	4.3
50°	3.3
52.5°	2.8
55°	2.4
57.5°	2.0
60°	1.8
62.5°	1.6
65°	1.4
67.5°	1.2
70°	1.0
72.5°	1.0
75°	0.8
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.0
90°	0.0

(END OF REPORT)