

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287947

Luminaire Tested: P3A05R15W2N902765DE010 E3DL1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287947
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R15W2N902765DE010 E3DL1GPH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 5000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 203.1 lumens
Efficiency: N/A
Efficacy: 34.4 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287947

CATALOG NUMBER: P3A05R15W2N902765DE010 E3DL1GPH_5000K

Luminous Intensity Polar Plot

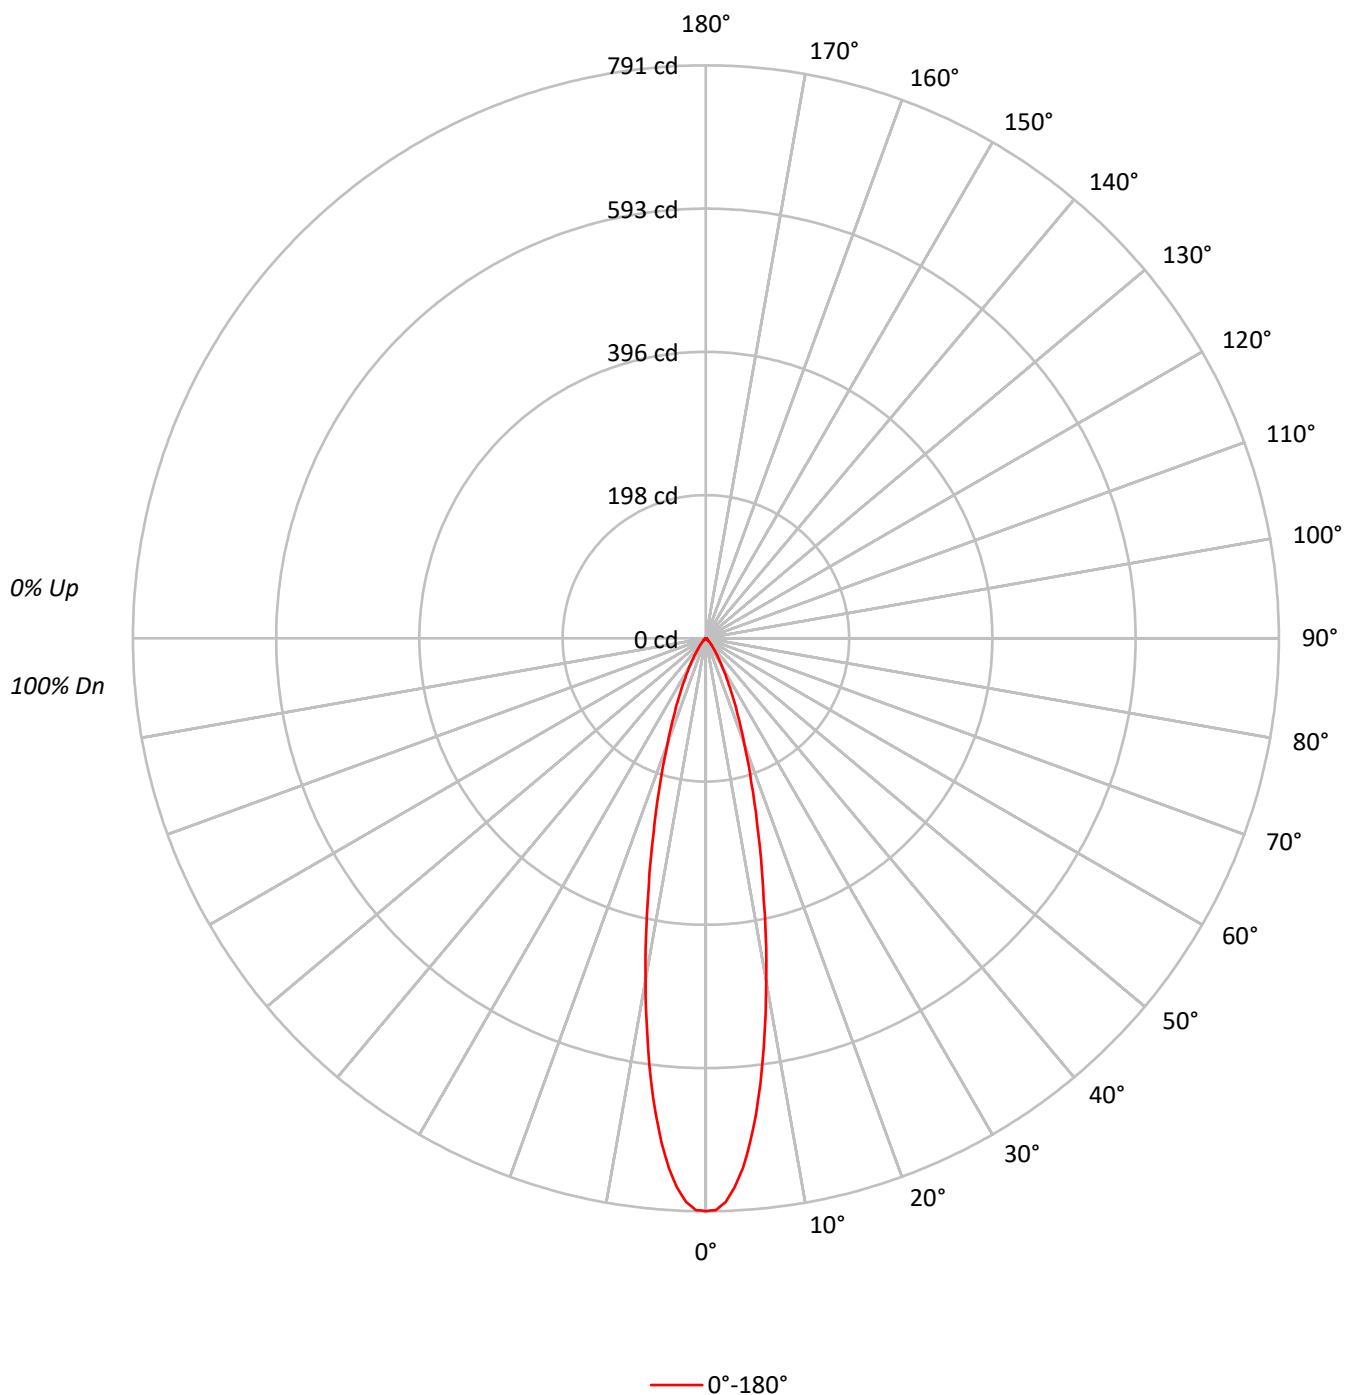

TEST NUMBER: P1287947

CATALOG NUMBER: P3A05R15W2N902765DE010 E3DL1GPH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91			91
3	106	101	97	93	104	99	96	93	97	94	91	94	92	90	92	90	88	87			87
4	102	96	92	88	100	95	91	88	93	89	87	91	88	86	89	87	85	83			83
5	98	92	87	84	97	91	87	83	89	85	83	88	84	82	86	83	81	80			80
6	95	88	83	80	94	87	83	80	86	82	79	85	81	79	83	80	78	77			77
7	92	85	80	77	91	84	80	76	83	79	76	82	78	76	81	78	75	74			74
8	89	81	77	74	88	81	77	73	80	76	73	79	75	73	78	75	73	72			72
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	73	70	69			69
10	84	76	71	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67			67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	173407
5°	153929
10°	106901
15°	63224
20°	36006
25°	20590
30°	11394
35°	6077
40°	3349
45°	1830
50°	1126
55°	879
60°	789
65°	726
70°	641
75°	678
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1830 cd/sqm

TEST NUMBER: P1287947

CATALOG NUMBER: P3A05R15W2N902765DE010 E3DL1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.5	29.3
10°-20°	78.5	38.7
20°-30°	40.4	19.9
30°-40°	15.2	7.5
40°-50°	5.0	2.4
50°-60°	2.1	1.0
60°-70°	1.4	0.7
70°-80°	0.8	0.4
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	178.4	87.8
0°-40°	193.5	95.3
0°-60°	200.6	98.8
0°-90°	203.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	203.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	791	
5°	699	59
15°	278	78
25°	85	40
35°	23	15
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1287947

CATALOG NUMBER: P3A05R15W2N902765DE010 E3DL1GPH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	790.8
1°	789.3
2°	778.9
3°	759.2
4°	733.1
5°	699.3
6°	661.0
7°	618.9
8°	572.2
9°	526.1
10°	480.1
12.5°	369.4
15°	278.5
17.5°	208.5
20°	154.3
22.5°	115.2
25°	85.1
27.5°	62.0
30°	45.0
32.5°	31.9
35°	22.7
37.5°	16.2
40°	11.7
42.5°	8.4
45°	5.9
47.5°	4.3
50°	3.3
52.5°	2.7
55°	2.3
57.5°	2.0
60°	1.8
62.5°	1.6
65°	1.4
67.5°	1.2
70°	1.0
72.5°	1.0
75°	0.8
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.0
90°	0.0

(END OF REPORT)