

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1288053

Luminaire Tested: P3A05R15W2N902765DE010 E3PH1MW_3500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1288053
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R15W2N902765DE010 E3PH1MW_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 3500K CCT AND, 90CRI ,
E3PH1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 343.0 lumens
Efficiency: N/A
Efficacy: 58.1 lumens/watt
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1288053

CATALOG NUMBER: P3A05R15W2N902765DE010 E3PH1MW_3500K

Luminous Intensity Polar Plot

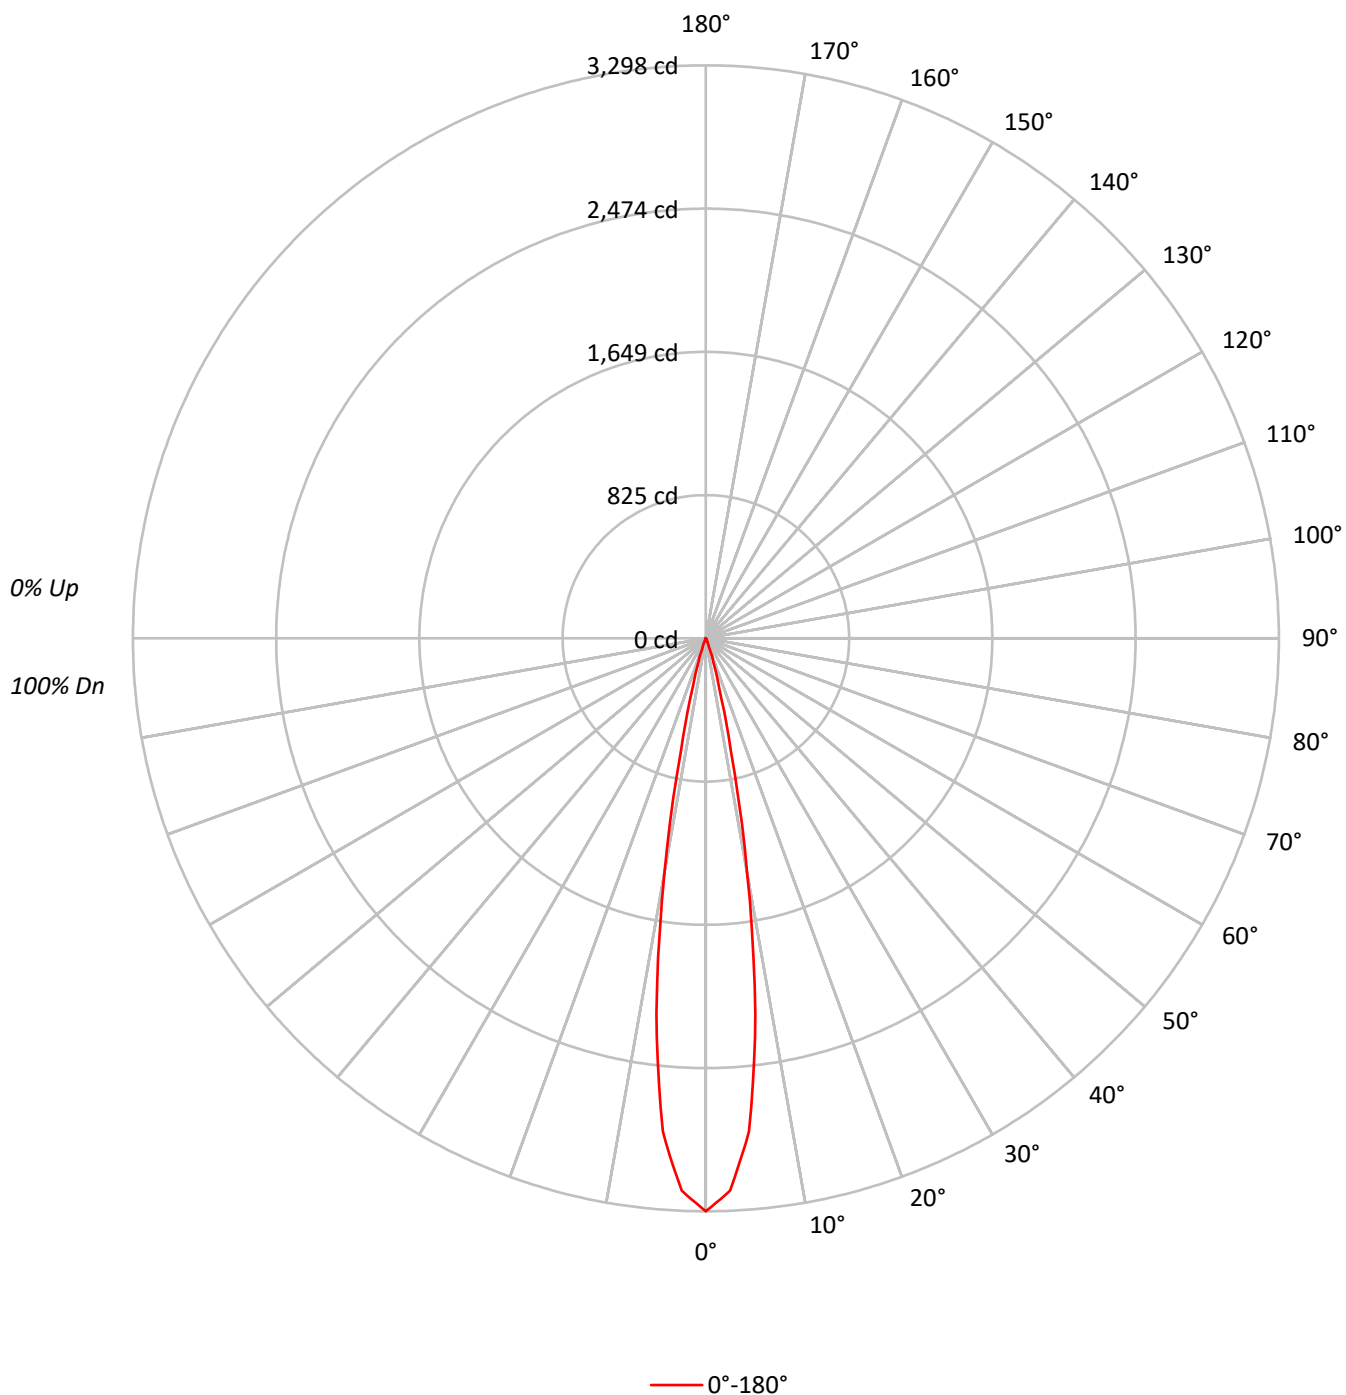

TEST NUMBER: P1288053

CATALOG NUMBER: P3A05R15W2N902765DE010 E3PH1MW_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20				20				20
RC	80				70				50				30				10				0				0				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	102	102	102	102	102	102	102	102	100
1	116	114	113	111	114	112	111	110	108	107	106	105	104	103	101	101	100	100	100	100	100	100	100	100	100	100	100	100	99
2	113	110	108	106	111	109	107	105	106	104	103	103	102	100	100	99	98	98	98	98	98	98	98	98	98	98	98	98	97
3	111	107	104	102	109	106	103	101	104	101	100	101	100	98	99	98	97	97	97	97	97	97	97	97	97	97	97	97	96
4	109	104	101	99	107	103	101	99	102	99	98	100	98	97	98	97	95	95	95	95	95	95	95	95	95	95	95	95	94
5	107	102	99	97	105	101	99	96	100	97	96	99	96	95	97	96	94	94	94	94	94	94	94	94	94	94	94	94	93
6	105	100	97	95	104	100	97	95	98	96	94	97	95	93	96	94	93	93	93	93	93	93	93	93	93	93	93	93	92
7	103	98	95	93	102	98	95	93	97	94	93	96	94	92	95	93	92	92	92	92	92	92	92	92	92	92	92	92	91
8	101	97	94	92	101	96	94	92	96	93	91	95	93	91	94	92	91	91	91	91	91	91	91	91	91	91	91	91	90
9	100	95	92	90	99	95	92	90	94	92	90	94	91	90	93	91	90	90	90	90	90	90	90	90	90	90	90	90	89
10	99	94	91	89	98	94	91	89	93	91	89	93	90	89	92	90	89	89	89	89	89	89	89	89	89	89	89	89	88

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	723188
5°	627029
10°	304871
15°	65040
20°	13675
25°	4065
30°	886
35°	161
40°	0
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 0 cd/sqm

TEST NUMBER: P1288053

CATALOG NUMBER: P3A05R15W2N902765DE010 E3PH1MW_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	222.5	64.9
10°-20°	110.6	32.3
20°-30°	9.2	2.7
30°-40°	0.6	0.2
40°-50°	0.0	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	342.4	99.8
0°-40°	343.0	100.0
0°-60°	343.0	100.0
0°-90°	343.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	343.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3298	
5°	2849	223
15°	286	111
25°	17	9
35°	1	1
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1288053

CATALOG NUMBER: P3A05R15W2N902765DE010 E3PH1MW_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	3298.0
2.5°	3182.6
5°	2848.6
7.5°	2181.1
10°	1369.2
12.5°	658.8
15°	286.5
17.5°	146.1
20°	58.6
22.5°	29.0
25°	16.8
27.5°	8.7
30°	3.5
32.5°	1.2
35°	0.6
37.5°	0.6
40°	0.0
42.5°	0.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)