

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1288120

Luminaire Tested: P3A05R20W2N902750DE010 E3D1WMH\_3000K

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1288120  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A05R20W2N902750DE010 E3D1WMH\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 3000K CCT AND, 90CRI ,  
E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 496.0 lumens  
Efficiency: N/A  
Efficacy: 84.1 lumens/watt  
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1288120

CATALOG NUMBER: P3A05R20W2N902750DE010 E3D1WMH\_3000K

### Luminous Intensity Polar Plot

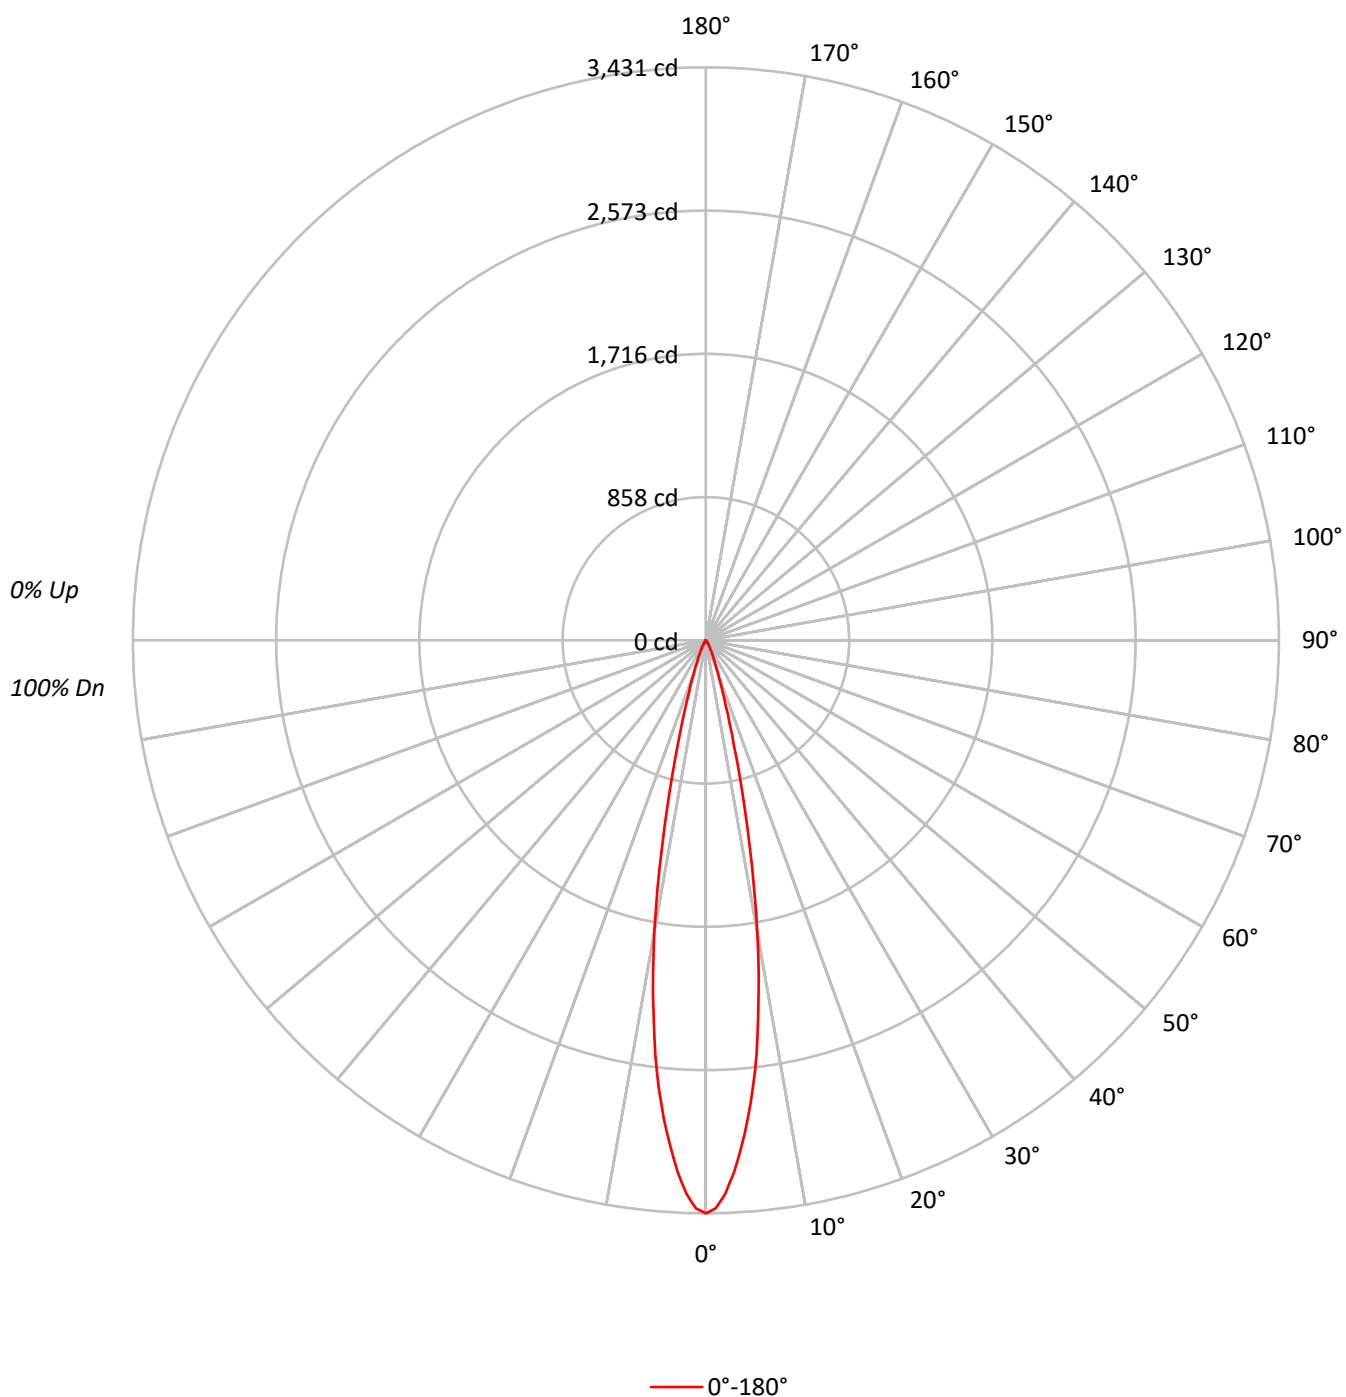

TEST NUMBER: P1288120

CATALOG NUMBER: P3A05R20W2N902750DE010 E3D1WMH\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |     | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 |
| 1   | 115 | 114 | 112 | 110 | 113 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 102 | 100 | 100 | 99  | 97  | 97  | 97  |
| 2   | 112 | 109 | 106 | 104 | 110 | 107 | 105 | 103 | 104 | 102 | 101 | 101 | 100 | 98  | 99  | 98  | 96  | 95  | 95  | 95  |
| 3   | 109 | 105 | 102 | 99  | 107 | 104 | 101 | 98  | 101 | 99  | 97  | 99  | 97  | 95  | 97  | 95  | 94  | 93  | 93  | 93  |
| 4   | 106 | 101 | 98  | 95  | 105 | 100 | 97  | 95  | 99  | 96  | 94  | 97  | 95  | 93  | 95  | 93  | 92  | 91  | 91  | 91  |
| 5   | 104 | 98  | 95  | 92  | 102 | 98  | 94  | 92  | 96  | 93  | 91  | 95  | 92  | 90  | 93  | 91  | 90  | 89  | 89  | 89  |
| 6   | 101 | 96  | 92  | 89  | 100 | 95  | 92  | 89  | 94  | 91  | 89  | 93  | 90  | 88  | 92  | 89  | 88  | 87  | 87  | 87  |
| 7   | 99  | 93  | 90  | 87  | 98  | 93  | 89  | 87  | 92  | 89  | 86  | 91  | 88  | 86  | 90  | 87  | 86  | 85  | 85  | 85  |
| 8   | 97  | 91  | 87  | 85  | 96  | 91  | 87  | 85  | 90  | 87  | 85  | 89  | 86  | 84  | 88  | 86  | 84  | 83  | 83  | 83  |
| 9   | 95  | 89  | 85  | 83  | 94  | 89  | 85  | 83  | 88  | 85  | 83  | 87  | 84  | 83  | 87  | 84  | 82  | 81  | 81  | 81  |
| 10  | 93  | 87  | 84  | 81  | 92  | 87  | 83  | 81  | 86  | 83  | 81  | 86  | 83  | 81  | 85  | 83  | 81  | 80  | 80  | 80  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 752396 |
| 5°  | 633478 |
| 10° | 395673 |
| 15° | 147924 |
| 20° | 50778  |
| 25° | 21171  |
| 30° | 9976   |
| 35° | 4470   |
| 40° | 2118   |
| 45° | 1085   |
| 50° | 409    |
| 55° | 76     |
| 60° | 88     |
| 65° | 104    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1085 cd/sqm

TEST NUMBER: P1288120

CATALOG NUMBER: P3A05R20W2N902750DE010 E3D1WMH\_3000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 239.3  | 48.2      |
| 10°-20°   | 197.1  | 39.7      |
| 20°-30°   | 44.8   | 9.0       |
| 30°-40°   | 11.4   | 2.3       |
| 40°-50°   | 2.9    | 0.6       |
| 50°-60°   | 0.4    | 0.1       |
| 60°-70°   | 0.1    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 481.3  | 97.0      |
| 0°-40°    | 492.7  | 99.3      |
| 0°-60°    | 495.9  | 100.0     |
| 0°-90°    | 496.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 496.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 3431 |      |
| 5°  | 2878 | 239  |
| 15° | 652  | 197  |
| 25° | 88   | 45   |
| 35° | 17   | 11   |
| 45° | 4    | 3    |
| 55° | 0    | 0    |
| 65° | 0    | 0    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1288120

CATALOG NUMBER: P3A05R20W2N902750DE010 E3D1WMH\_3000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 3431.2 |
| 1°    | 3402.1 |
| 2°    | 3316.4 |
| 3°    | 3193.4 |
| 4°    | 3042.5 |
| 5°    | 2877.9 |
| 6°    | 2694.4 |
| 7°    | 2492.0 |
| 8°    | 2255.8 |
| 9°    | 2021.7 |
| 10°   | 1777.0 |
| 11°   | 1516.5 |
| 12°   | 1256.5 |
| 13°   | 1036.2 |
| 14°   | 825.6  |
| 15°   | 651.6  |
| 16°   | 514.3  |
| 17°   | 405.7  |
| 18°   | 326.0  |
| 19°   | 265.1  |
| 20°   | 217.6  |
| 21°   | 181.9  |
| 22°   | 151.8  |
| 23°   | 126.2  |
| 24°   | 105.3  |
| 25°   | 87.5   |
| 27.5° | 57.2   |
| 30°   | 39.4   |
| 32.5° | 24.2   |
| 35°   | 16.7   |
| 37.5° | 10.7   |
| 40°   | 7.4    |
| 42.5° | 5.0    |
| 45°   | 3.5    |
| 47.5° | 2.3    |
| 50°   | 1.2    |
| 52.5° | 0.6    |
| 55°   | 0.2    |
| 57.5° | 0.2    |
| 60°   | 0.2    |
| 62.5° | 0.2    |
| 65°   | 0.2    |
| 67.5° | 0.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |

TEST NUMBER: P1288120

CATALOG NUMBER: P3A05R20W2N902750DE010 E3D1WMH\_3000K

**CANDELA DISTRIBUTION (continued):**

|       | 0°  |
|-------|-----|
| 75°   | 0.0 |
| 77.5° | 0.0 |
| 80°   | 0.0 |
| 82.5° | 0.0 |
| 85°   | 0.0 |
| 87.5° | 0.0 |
| 90°   | 0.0 |

(END OF REPORT)