

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1288736

Luminaire Tested: P3A05R30W2N902750DE010 E3CD1MW_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1288736
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R30W2N902750DE010 E3CD1MW_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 5000K CCT AND, 90CRI ,
E3CD1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 508.0 lumens
Efficiency: N/A
Efficacy: 86.1 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1288736
CATALOG NUMBER: P3A05R30W2N902750DE010 E3CD1MW_5000K

Luminous Intensity Polar Plot

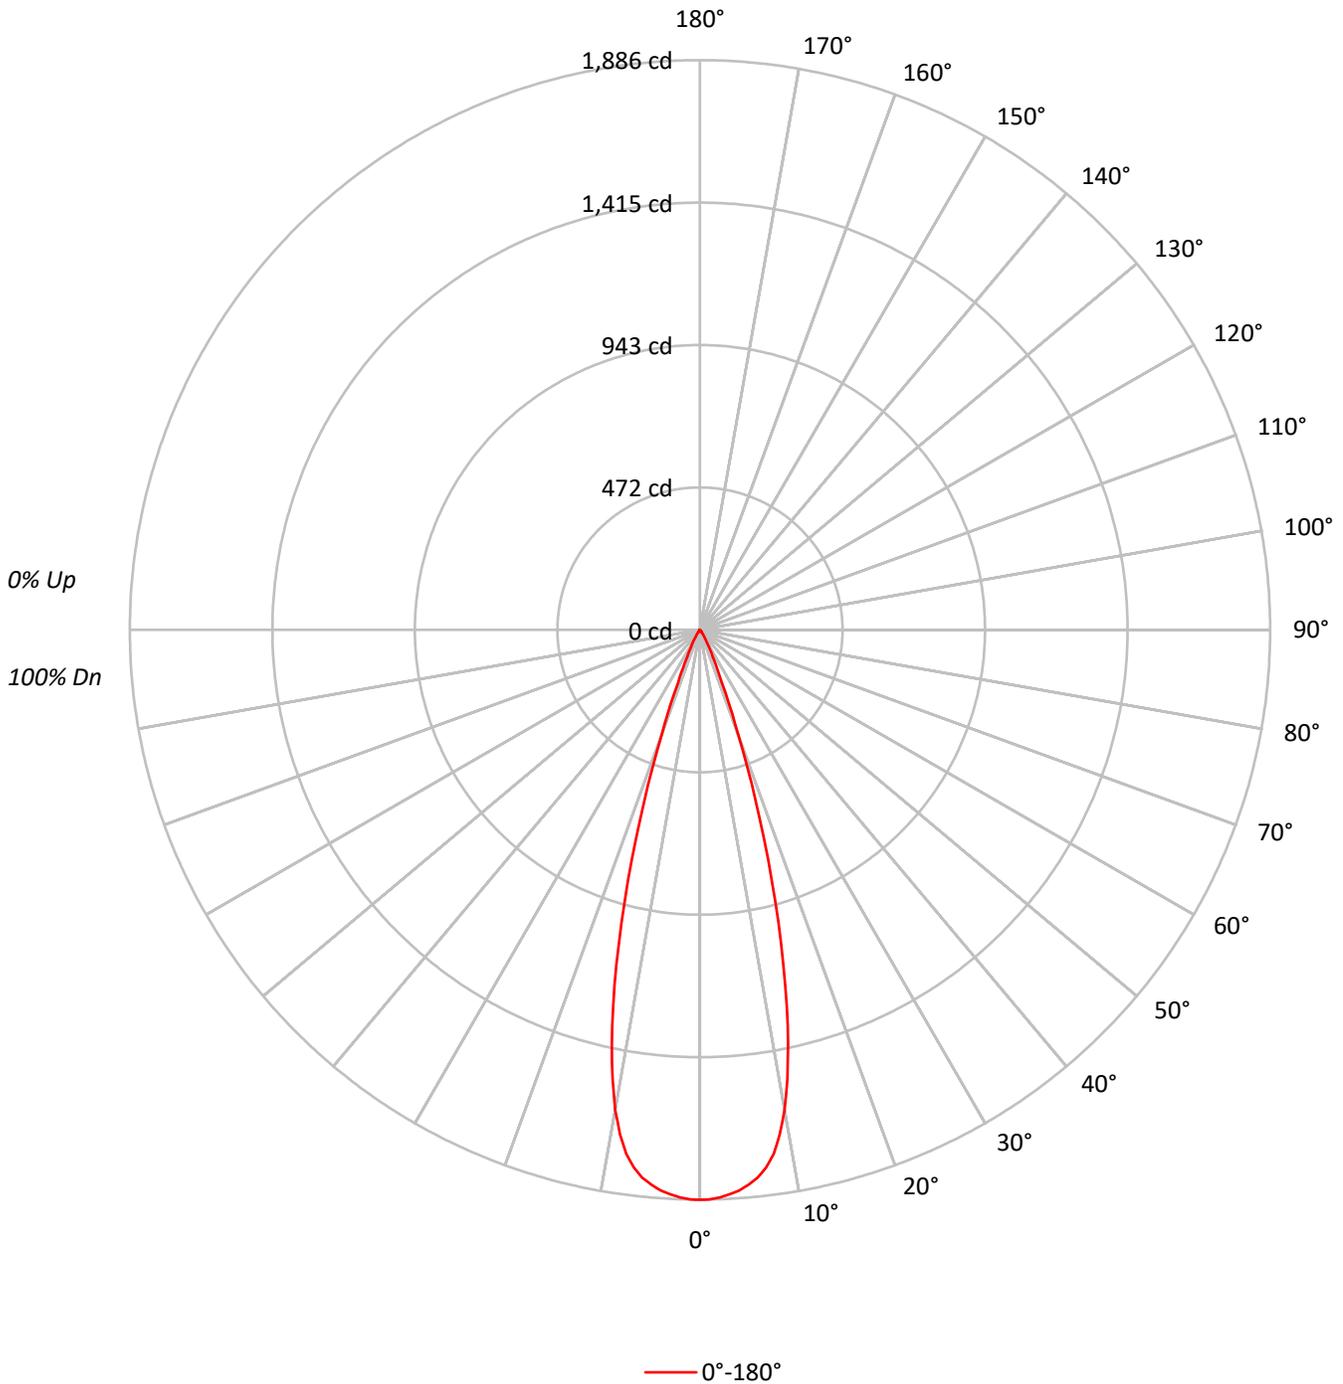



TEST NUMBER: P1288736

CATALOG NUMBER: P3A05R30W2N902750DE010 E3CD1MW_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	98	96	95	97
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	95	94	92	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	93	91	89	91
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	93	91	89	88
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	87	91	88	87	85
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	89	86	84	83
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	86	84	82	81
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	84	82	80	79
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	82	79	77	77
10	89	83	79	76	88	82	78	76	82	78	76	81	78	76	80	77	75	80	77	75	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	413673
5°	405876
10°	359290
15°	227629
20°	86411
25°	25574
30°	10103
35°	3105
40°	1374
45°	496
50°	409
55°	306
60°	351
65°	415
70°	256
75°	339
80°	505
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 80°
 Luminance: 505 cd/sqm



TEST NUMBER: P1288736

CATALOG NUMBER: P3A05R30W2N902750DE010 E3CD1MW_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.5	33.4
10°-20°	264.2	52.0
20°-30°	61.3	12.1
30°-40°	9.5	1.9
40°-50°	1.6	0.3
50°-60°	0.8	0.1
60°-70°	0.6	0.1
70°-80°	0.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	495.0	97.4
0°-40°	504.5	99.3
0°-60°	506.9	99.8
0°-90°	508.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	508.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1886	
5°	1844	169
15°	1003	264
25°	106	61
35°	12	10
45°	2	2
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1288736

CATALOG NUMBER: P3A05R30W2N902750DE010 E3CD1MW_5000K


CANDELA DISTRIBUTION (FULL):

0°	
0°	1886.5
1°	1885.3
2°	1880.2
3°	1871.4
4°	1860.2
5°	1843.9
6°	1823.5
7°	1793.2
8°	1751.7
9°	1690.6
10°	1613.6
11°	1514.3
12°	1402.1
13°	1277.6
14°	1140.8
15°	1002.7
17.5°	656.0
20°	370.3
22.5°	189.1
25°	105.7
27.5°	65.0
30°	39.9
32.5°	21.5
35°	11.6
37.5°	7.6
40°	4.8
42.5°	2.8
45°	1.6
47.5°	1.2
50°	1.2
52.5°	0.8
55°	0.8
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.8
67.5°	0.4
70°	0.4
72.5°	0.4
75°	0.4
77.5°	0.4
80°	0.4
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1288736
CATALOG NUMBER: P3A05R30W2N902750DE010 E3CD1MW_5000K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)