

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289256

Luminaire Tested: P3A05R35W2N902765DE010 E3DL1LI\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1289256  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A05R35W2N902765DE010 E3DL1LI\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 4000K CCT AND, 90CRI ,  
E3DL1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 422.0 lumens  
Efficiency: N/A  
Efficacy: 71.5 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1289256  
CATALOG NUMBER: P3A05R35W2N902765DE010 E3DL1LI\_4000K

### Luminous Intensity Polar Plot

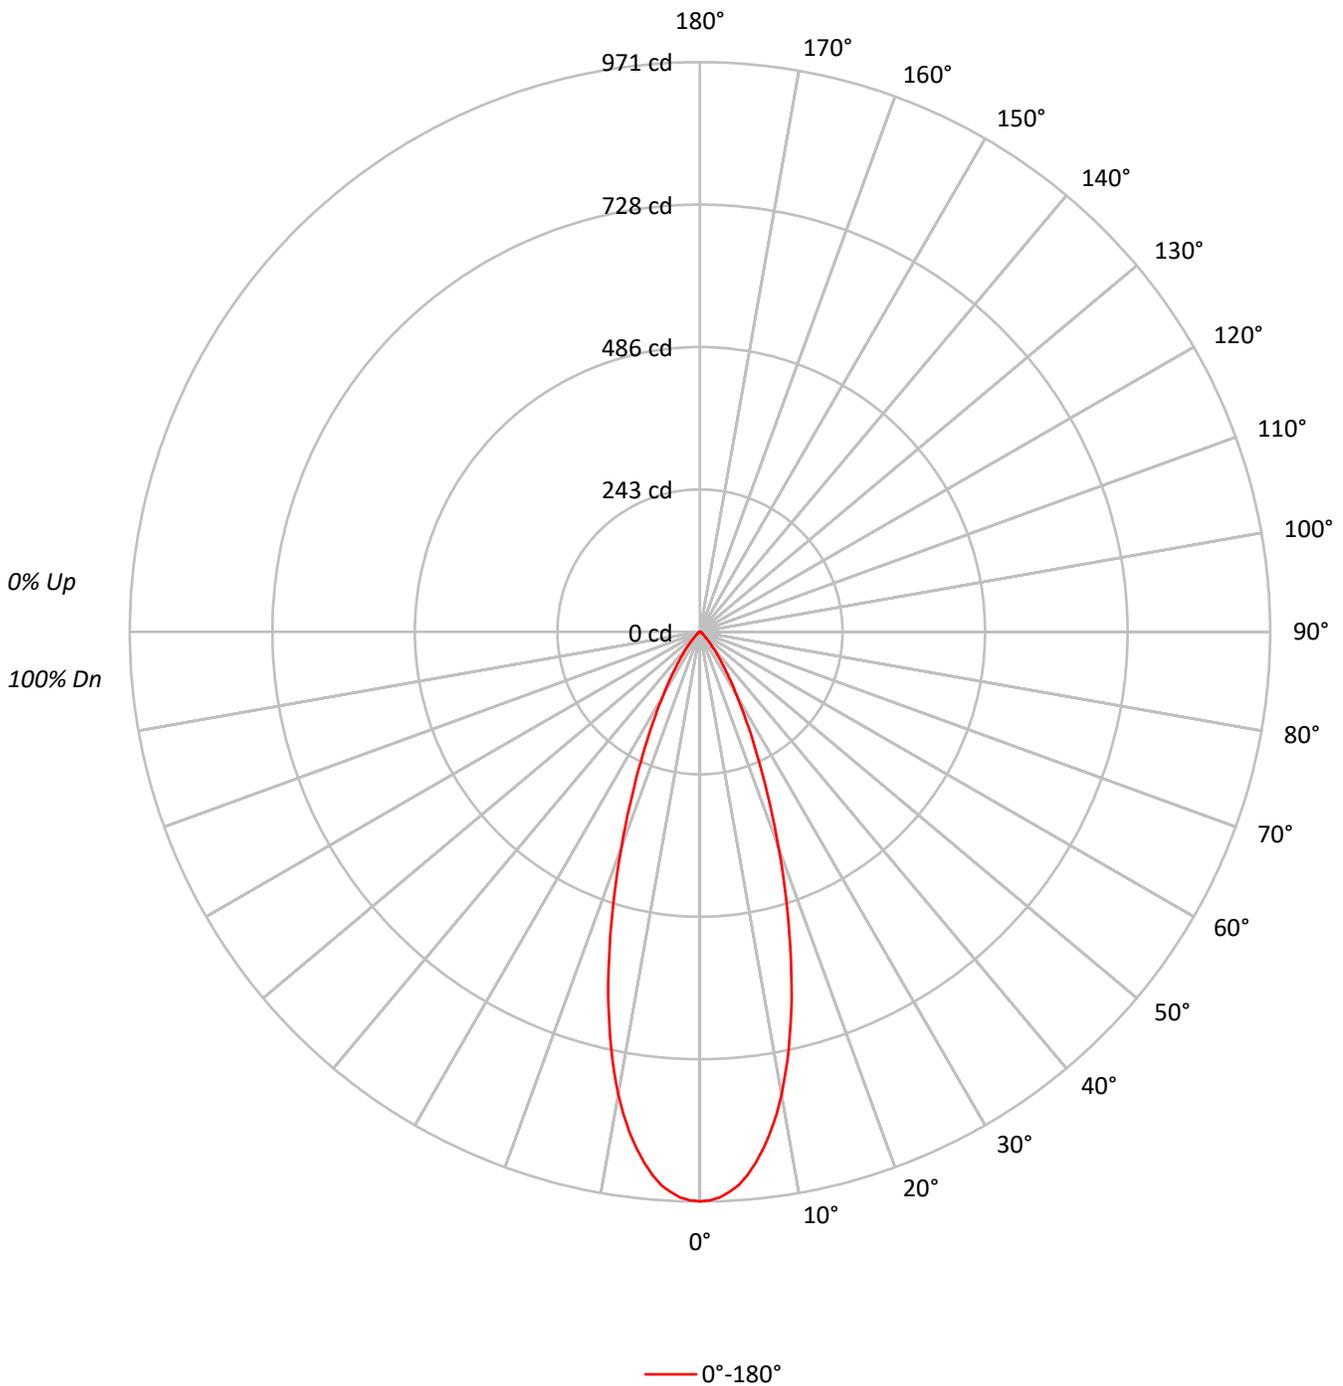





TEST NUMBER: P1289256

CATALOG NUMBER: P3A05R35W2N902765DE010 E3DL1LI\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	84.5	20.0
10°-20°	163.8	38.8
20°-30°	107.3	25.4
30°-40°	43.5	10.3
40°-50°	13.1	3.1
50°-60°	4.4	1.0
60°-70°	3.0	0.7
70°-80°	1.7	0.4
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	355.7	84.3
0°-40°	399.2	94.6
0°-60°	416.7	98.7
0°-90°	422.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	422.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	971	
5°	929	85
15°	601	164
25°	228	107
35°	66	44
45°	16	13
55°	5	4
65°	3	3
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1289256

CATALOG NUMBER: P3A05R35W2N902765DE010 E3DL1LI\_4000K


**CANDELA DISTRIBUTION (FULL):**

0°	
0°	970.6
1°	969.0
2°	964.6
3°	955.8
4°	945.3
5°	929.3
6°	909.2
7°	886.7
8°	861.4
9°	832.5
10°	800.4
11°	764.7
12°	727.4
13°	685.6
14°	645.9
15°	601.3
17.5°	493.3
20°	391.4
22.5°	301.1
25°	228.4
27.5°	170.2
30°	125.2
32.5°	91.9
35°	66.2
37.5°	47.0
40°	32.9
42.5°	22.9
45°	15.7
47.5°	10.4
50°	6.8
52.5°	5.2
55°	4.8
57.5°	4.4
60°	4.0
62.5°	3.6
65°	2.8
67.5°	2.4
70°	2.4
72.5°	2.0
75°	1.6
77.5°	1.2
80°	1.2
82.5°	0.8
85°	0.4
87.5°	0.4



TEST NUMBER: P1289256  
CATALOG NUMBER: P3A05R35W2N902765DE010 E3DL1LI\_4000K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)