

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289307

Luminaire Tested: P3A05R35W2N902765DE010 E3DLD1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289307
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R35W2N902765DE010 E3DLD1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 2700K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 290.0 lumens
Efficiency: N/A
Efficacy: 49.2 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289307

CATALOG NUMBER: P3A05R35W2N902765DE010 E3DLD1WMH_2700K

Luminous Intensity Polar Plot

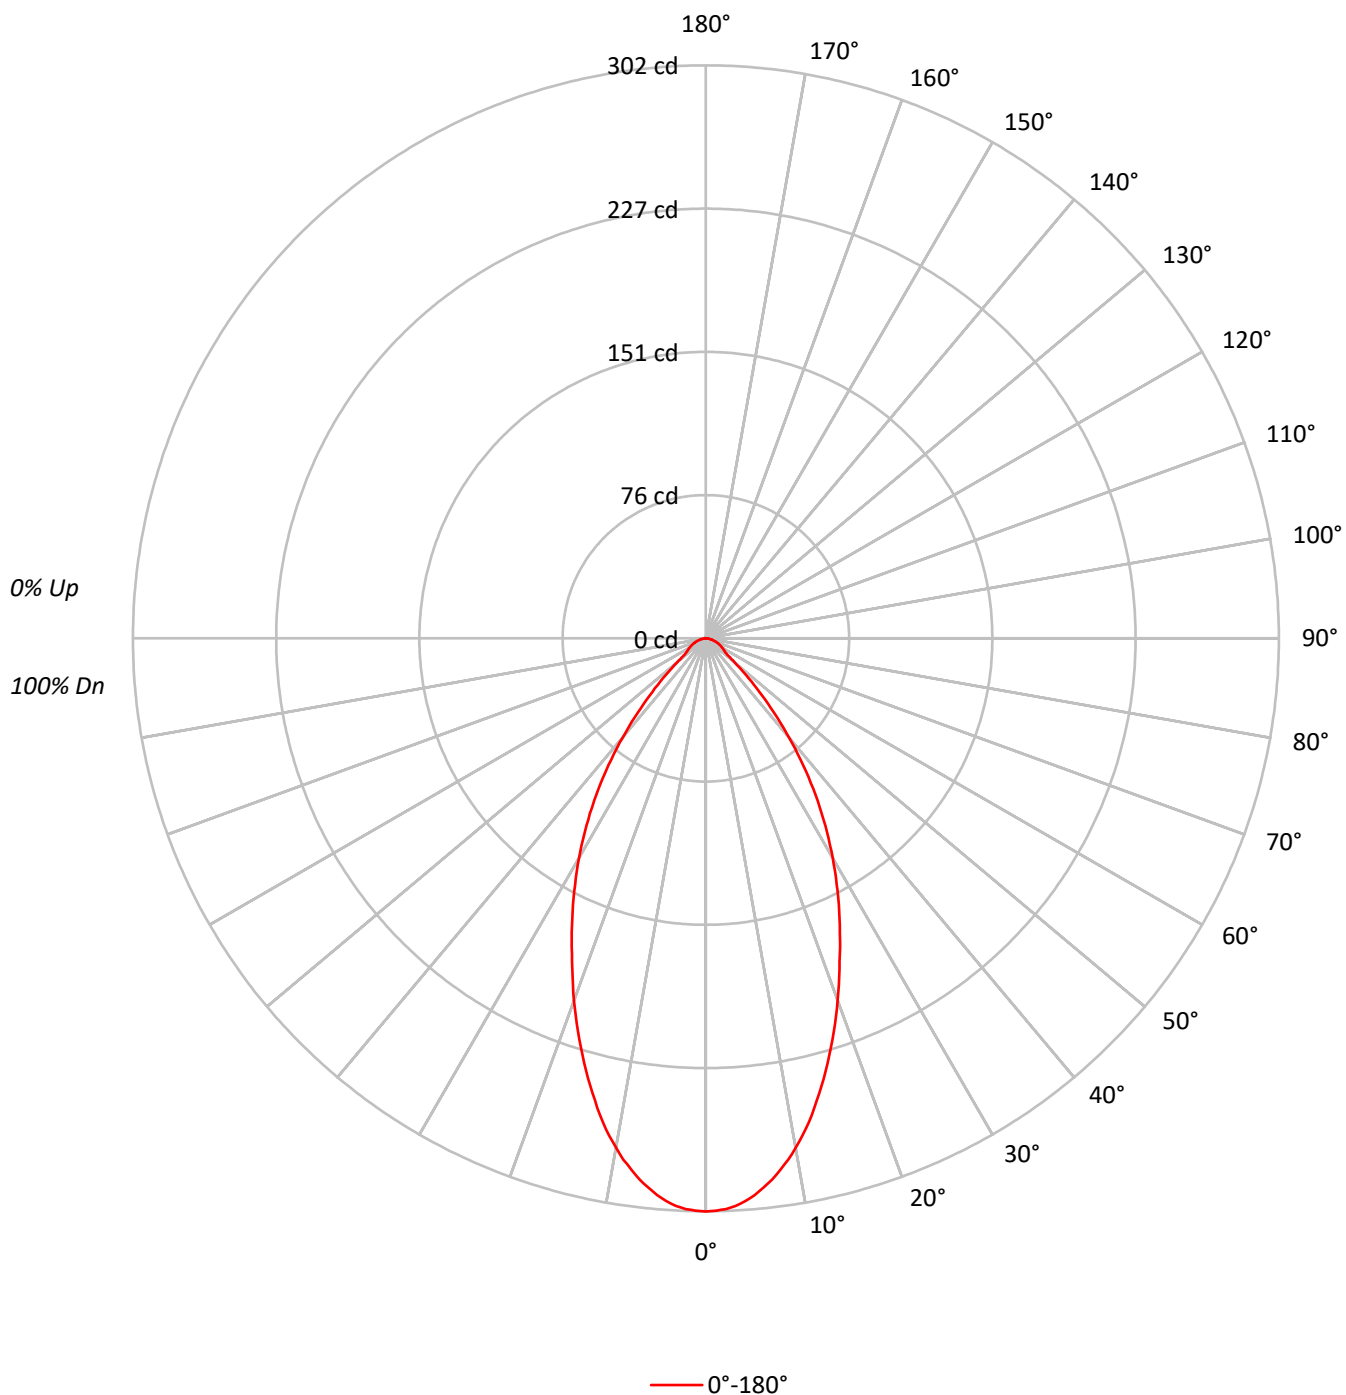



TEST NUMBER: P1289307

CATALOG NUMBER: P3A05R35W2N902765DE010 E3DLD1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	66245
5°	64847
10°	60720
15°	54507
20°	47417
25°	40406
30°	33853
35°	26957
40°	19494
45°	12342
50°	6720
55°	4664
60°	4386
65°	4099
70°	3911
75°	3304
80°	3157
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12342 cd/sqm

TEST NUMBER: P1289307

CATALOG NUMBER: P3A05R35W2N902765DE010 E3DLD1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	27.4	9.5
10°-20°	66.8	23.0
20°-30°	76.6	26.4
30°-40°	62.5	21.5
40°-50°	31.5	10.9
50°-60°	11.7	4.0
60°-70°	7.9	2.7
70°-80°	4.3	1.5
80°-90°	1.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	170.8	58.9
0°-40°	233.3	80.4
0°-60°	276.5	95.3
0°-90°	290.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	290.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	302	
5°	295	27
15°	240	67
25°	167	77
35°	101	62
45°	40	32
55°	12	12
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1289307

CATALOG NUMBER: P3A05R35W2N902765DE010 E3DLD1WMH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	302.1
1°	301.7
2°	301.0
3°	299.6
4°	297.4
5°	294.6
6°	291.0
7°	287.4
8°	282.7
9°	278.1
10°	272.7
11°	267.0
12°	260.9
13°	254.1
14°	246.9
15°	240.1
17.5°	221.8
20°	203.2
22.5°	184.2
25°	167.0
27.5°	150.2
30°	133.7
32.5°	117.2
35°	100.7
37.5°	84.2
40°	68.1
42.5°	53.0
45°	39.8
47.5°	28.7
50°	19.7
52.5°	14.3
55°	12.2
57.5°	11.1
60°	10.0
62.5°	9.0
65°	7.9
67.5°	6.8
70°	6.1
72.5°	5.0
75°	3.9
77.5°	3.2
80°	2.5
82.5°	1.8
85°	1.1
87.5°	0.7



TEST NUMBER: P1289307

CATALOG NUMBER: P3A05R35W2N902765DE010 E3DLD1WMH_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)