

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289419

Luminaire Tested: P3A05R40W2N902750DE010 E3D1WMH_3500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289419
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R40W2N902750DE010 E3D1WMH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3500K CCT AND, 90CRI ,
E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 562.0 lumens
Efficiency: N/A
Efficacy: 95.3 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289419

CATALOG NUMBER: P3A05R40W2N902750DE010 E3D1WMH_3500K

Luminous Intensity Polar Plot

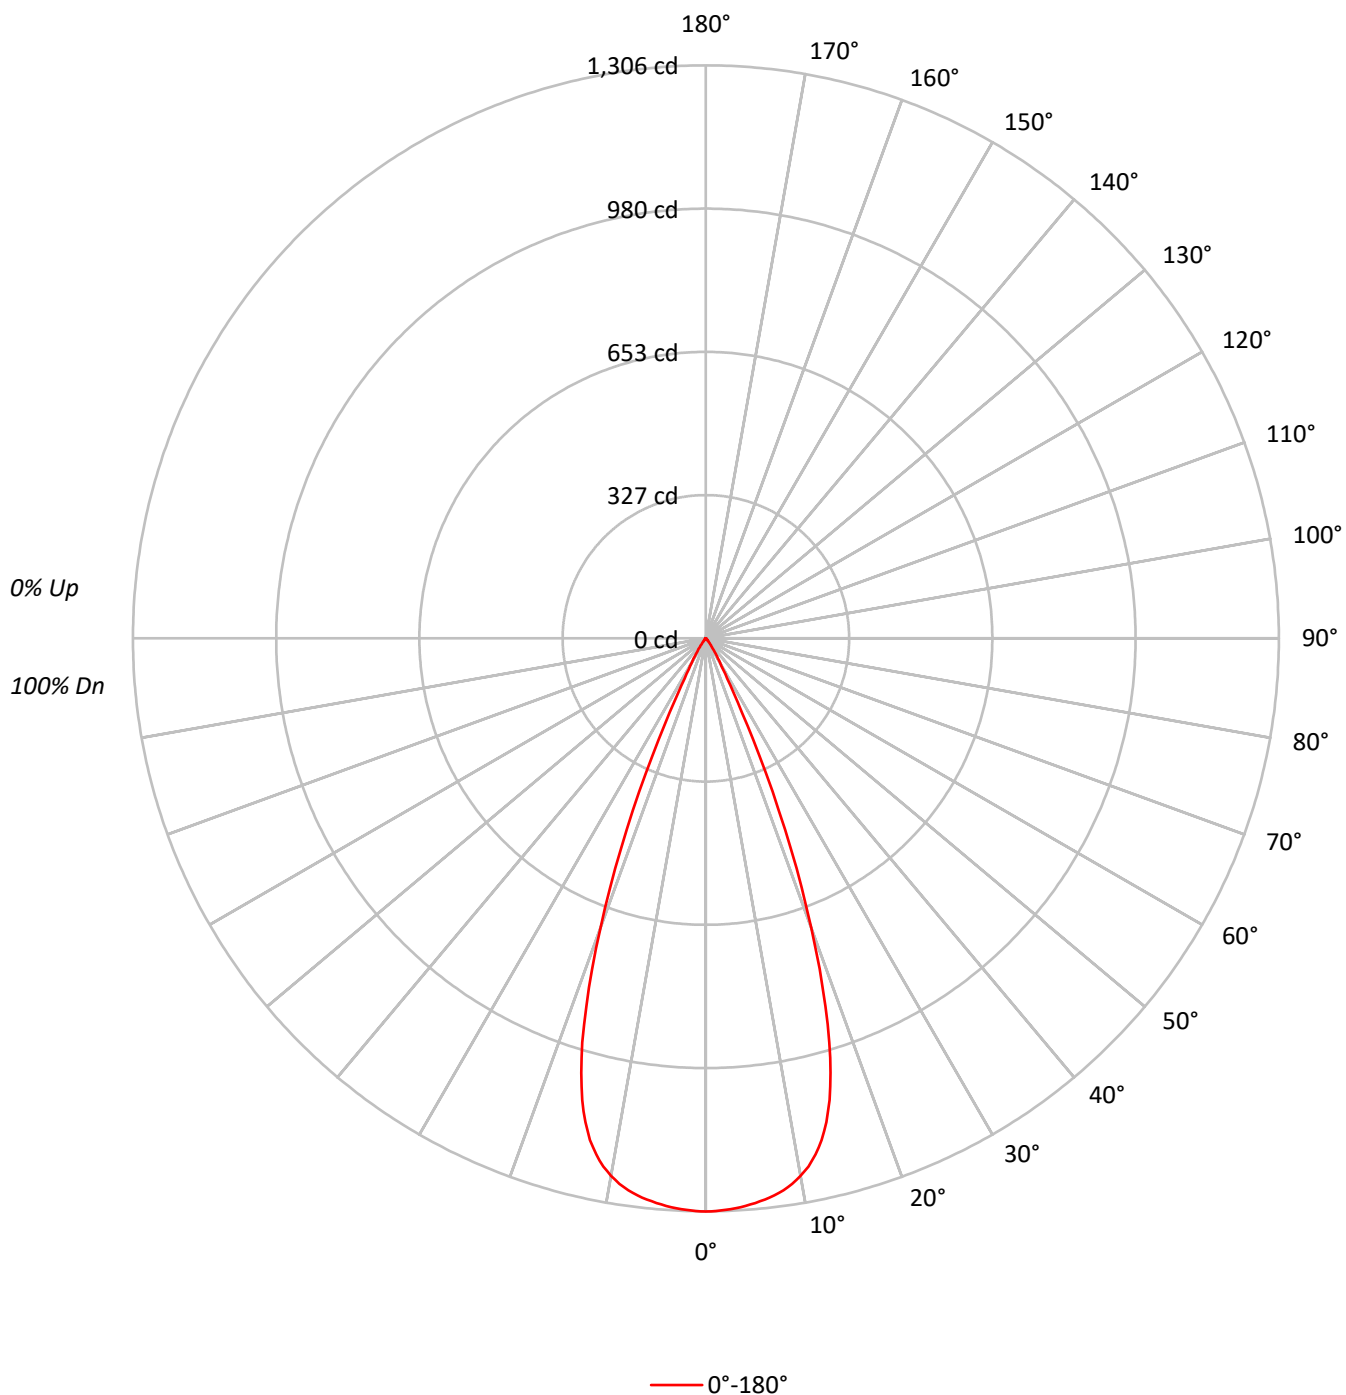

TEST NUMBER: P1289419

CATALOG NUMBER: P3A05R40W2N902750DE010 E3D1WMH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20				20				20
RC	80				70				50				30				10				0				0				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100											
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	96											
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	96	95	94	92											
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	93	91	90	88											
4	103	97	93	90	101	96	92	89	94	91	88	92	89	87	90	88	86	85											
5	99	93	89	85	98	92	88	85	91	87	84	89	86	84	88	85	83	82											
6	96	89	85	81	95	89	84	81	87	83	81	86	83	80	85	82	80	79											
7	93	86	81	78	92	85	81	78	84	80	77	83	80	77	82	79	77	76											
8	90	83	78	75	89	82	78	75	81	77	75	80	77	74	79	76	74	73											
9	87	80	75	72	86	79	75	72	78	75	72	78	74	72	77	74	71	70											
10	84	77	72	70	83	77	72	69	76	72	69	75	72	69	74	71	69	68											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	286468
5°	284393
10°	276949
15°	247402
20°	164048
25°	61455
30°	16433
35°	6425
40°	2319
45°	1085
50°	341
55°	153
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1085 cd/sqm

TEST NUMBER: P1289419

CATALOG NUMBER: P3A05R40W2N902750DE010 E3D1WMH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.9	21.7
10°-20°	288.8	51.4
20°-30°	130.9	23.3
30°-40°	17.0	3.0
40°-50°	2.9	0.5
50°-60°	0.4	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	541.6	96.4
0°-40°	558.6	99.4
0°-60°	561.9	100.0
0°-90°	562.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	562.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1306	
5°	1292	122
15°	1090	289
25°	254	131
35°	24	17
45°	4	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1289419

CATALOG NUMBER: P3A05R40W2N902750DE010 E3D1WMH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1306.4
1°	1305.6
2°	1303.6
3°	1300.7
4°	1296.9
5°	1292.0
6°	1286.3
7°	1279.2
8°	1270.6
9°	1258.8
10°	1243.8
11°	1226.3
12°	1202.9
13°	1174.0
14°	1136.2
15°	1089.8
16°	1030.5
17°	963.1
18°	882.0
19°	796.4
20°	703.0
21°	609.5
22°	517.4
23°	425.8
24°	335.6
25°	254.0
26°	188.1
27°	137.7
28°	103.5
29°	80.5
30°	64.9
31°	53.7
32°	44.9
32.5°	40.9
33°	37.0
34°	30.1
35°	24.0
36°	18.9
37°	15.0
37.5°	13.4
38°	11.8
39°	9.8
40°	8.1
42.5°	5.3
45°	3.5



TEST NUMBER: P1289419

CATALOG NUMBER: P3A05R40W2N902750DE010 E3D1WMH_3500K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	2.2
50°	1.0
52.5°	0.4
55°	0.4
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)